


The James Way






New York
State College of Agriculture
At Cornell University
Ithaca, N. Y.

Library

CORNELL UNIVERSITY LIBRARY



3 1924 051 998 791



Cornell University Library

The original of this book is in
the Cornell University Library.

There are no known copyright restrictions in
the United States on the use of the text.

<http://www.archive.org/details/cu31924051998791>



486 W



The
JAMES WAY

A book showing how to
build and equip a practical
up to date Dairy Barn



JAMES

Published by

The James Manufacturing Co.
Fort Atkinson, Wisconsin.

c 1918

The James Way

CATALOG No. 24


THIS edition is issued May 1, 1918,
and is subject to change without
notice.

The James Manufacturing Co.
reserves the right to make changes or
improvements at any time without any
obligation to install same on equipment
previously sold.

For the convenience of readers, a com-
plete index at the end of the book has
been provided.

Copyright 1918 by
JAMES MANUFACTURING CO.
Fort Atkinson, Wis. Elmira, N. Y.

Foreword



THIS book is issued as a practical guide to him who is interested in or should interest himself in the better building and better equipment of barns—particularly dairy barns.

It has been the privilege of the James Manufacturing Company to originate Sanitary dairy barn equipment ideas that make it easy to maintain the conditions of cleanliness in the stable required by law; equipment that not only helps in keeping the barn clean but effects great savings of labor, time and feed, forces cows to give more milk and prevents in many ways losses by accidents and disease.

How this equipment accomplishes such results is told in this volume. Whatever faults this book may have, I believe it has at least one merit—that every word in it is true. I know that there has been no intentional exaggeration or misstatement in any way. The facts are plenty good enough.

From the very beginning of this business, we have been called on by customers and prospective customers for information and advice, not only regarding the arrangement of the floor space, but also the design of the dairy barn throughout. In order that we might serve our customers, we early established a Barn Planning Department for the benefit of all who might be interested in the building of good barns. This Department has rapidly grown from year to year until it has now become a great clearing house of ideas relating to the improvement of dairy and other farm buildings.

As a part of this service we publish the following pages regarding dairy barn construction; not with any thought that these pages cover the subject comprehensively, but rather as a bird's-eye view of the general subject with specific suggestions on the more important points.

The subject matter and the drawings apply to the conditions in territory where cows are housed over night and in cold or bad weather; but we are also in position to advise as to barns in warmer climates.

If you do not find in this book the information you desire regarding barn construction, I hope you will feel perfectly free to write this Company or write me personally and we shall be glad to do what we can to help you solve your barn problems.

Experienced members of our organization make frequent journeys to various sections of the country. When letters asking for advice are received by us, it is often possible to have one of these competent men call in person, without expense to you, to help solve the barn questions that are troubling you. We are glad to do this whenever possible.

The business has now grown so large that I am no longer able to give personal attention to every detail; and if at any time you feel that you are not getting the service you desire, or if there is anything not entirely pleasing to



JAMES MANUFACTURING CO. EQUIPMENT

JAMES MANUFACTURING CO. SANITARY DAIRY BARN

OFFICE

Elmira, N.Y. Plant

you in your transactions with us, I shall appreciate it as a very real and personal favor if you will write me regarding it.

It is my desire, and the desire of every member of this organization, to be of real service in the betterment of dairy barn conditions. If we are not measuring up to our opportunity, we shall certainly appreciate criticism as a friendly act.

It is difficult to cover such a big subject thoroughly and satisfactorily even in a book of this size. Individual problems are oftentimes the most easily solved by personal consultation; and many dairymen, often from far away sections of the country, have told us that the information obtained by personally visiting our plant has saved them many times the expense of the journey.

I wish to extend a very cordial invitation to you also to visit our factory at Ft. Atkinson or at Elmira, and to assure you of a welcome when you come.

Yours very sincerely,

H. James






The place where W. H. James and his father built the first James' mill in 1906



Factory and Office Employees - 1907



Present Factory Employees

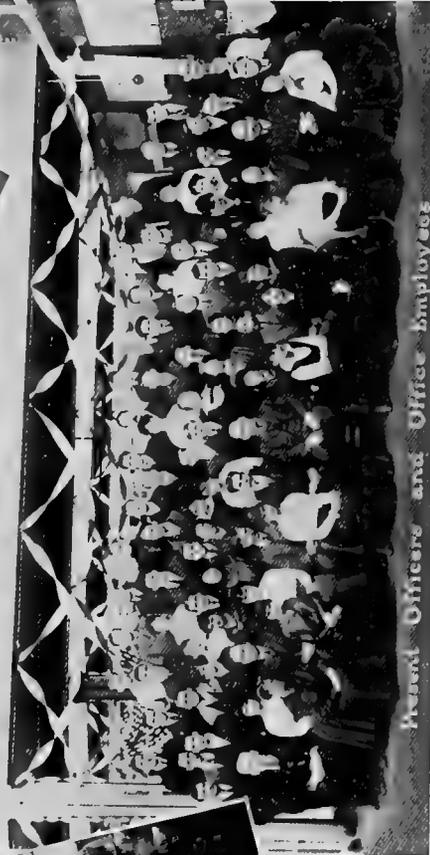

Present Officers and Office Employees

Service
JAMES Quality
 Merit
 Caused this growth




The Home Plant, Ft. Atkinson, Wis.



Barn of J. Smith & Son - Boarded, designed and equipped the James Way




Barn of Bordens Condensed Milk Co. Equipped the James Way
Racine Wisc.

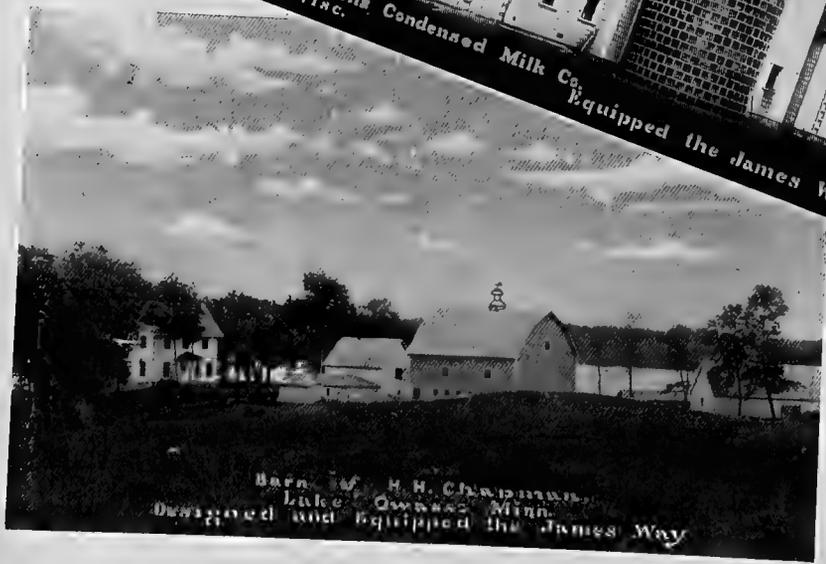

Barn of H. H. Chapman
Lake Quince, Minn.
Designed and equipped the James Way

Building a Dairy Barn



THE proper and economical erection of a dairy barn requires greater foresight and more careful planning than is usually given the subject.

The dairy barn is your factory—your workshop—in use almost daily throughout each year.

If the barn is not built right—if it is not correctly planned—it may result in losing money for you every day. A barn once built is not easily moved or altered in size, shape or arrangement; hence the vital importance of making certain that the barn is correctly designed before it is built.

Mistakes in building have a very unpleasant habit of forcing themselves upon a man's attention after it is too late to rectify them. The most thorough investigation, study and thought before building is necessary to forestall errors that would later prove extremely expensive.

Wrong location of posts—inconvenient arrangement of feed bins and feed rooms—incorrect arrangement of carrier tracking—or the wrong design of framing may compel you to take more steps, do more work, and pay out more money for help each day throughout the life of the barn.

A silo or a door in the wrong place—poor arrangement of equipment—ventilating intakes or outtakes improperly installed—mistakes in size of stall floors, gutters, passages and alleys—even these small items may be a source of daily expense.

A barn correctly designed and built is right in every little detail—it is a constant money maker, because it will save time, labor and feed each day.

It will add to the value of your farm, and get you a better price for it when you want to sell, for the average farm buyer looks at the improvements first. The farm with a convenient, practical barn will sell at a higher price than another farm of equal fertility, with a more costly but inconvenient and poorly arranged barn.

The right plans will not only give you a better barn from the standpoint of looks, from the standpoint of convenience in handling the daily chores, and in comfort for the cows—but it need cost you no more than the same size barn poorly designed and inconveniently arranged.

A good stable also adds to the selling value of your cows because it shows them off better, makes them healthier, finer looking, and better producers.

If you intend to build a new barn or remodel an old one, you are, of course, anxious to avoid the expensive mistakes of poor plans, carelessly and hastily made.

This can only be done by studying the entire matter carefully for yourself, and getting all the suggestions and help you can from others who have had wider experience in the planning of dairy buildings.



The writer and associates have not only designed hundreds of the practical dairy barns of the country, but thousands of barn plans are being submitted to them yearly for their criticism and suggestions. Because of this wide experience, some of the things we have learned regarding barn building may be of interest and help in the planning of your barn. This book is published in the hope that it may help you and other dairymen to secure better barns for the money you have to invest.

There are many points on which dairymen differ with regard to barn construction—differing conditions of climate, territory and purpose, making each barn almost an individual proposition.

The barn that meets the needs of one man in Wisconsin may be totally unsuited to the requirements of his next door neighbor or to the needs of a farmer in Tennessee.

The amount of money available for building, the kind of dairy farming to be carried on, the site, character of building materials most convenient, and many other points known only to the owner himself, require consideration. Nevertheless, there are certain fundamental conditions common to most dairy barns, and with the above in mind it is our purpose to give general information that is most interesting to prospective builders.

Fundamentals



In order that the dairy barn may become as big a profit maker as possible, certain fundamental elements must be remembered. The most important items to be considered are cleanliness; cow comfort and cow health; convenience for the workman in handling the daily chores, and economy of construction.

The dairy barn is a place where human food is produced. For the protection of the public health, and for the well-being and comfort of your cows—as well as to meet the requirements of those who buy your products—the first great essential to be kept in mind is cleanliness.

By use of the proper construction, and by carefully planning the arrangement of the stable, this point may be cared for without excessive increase in cost of building, or in cost of operating the plant.

Since contented, healthy cows produce more milk, the things that please the cow and insure her health and comfort must likewise receive thoughtful attention.

If the arrangement of the barn is planned rightly, plentiful lighting, abundant ventilation and easy disposal of the litter will be provided—all floor space will be used economically and to the best advantage—and the number of steps necessary in doing the daily chores will be reduced to the minimum.

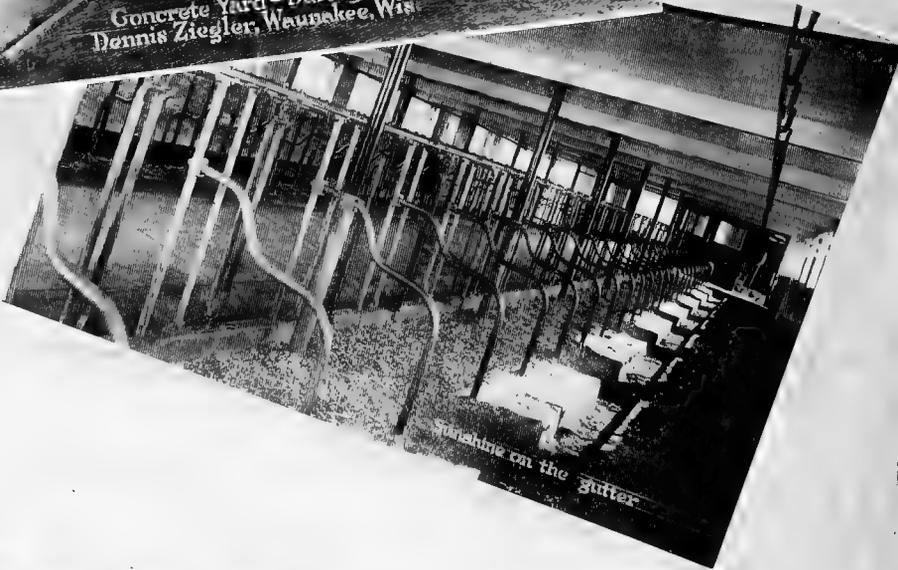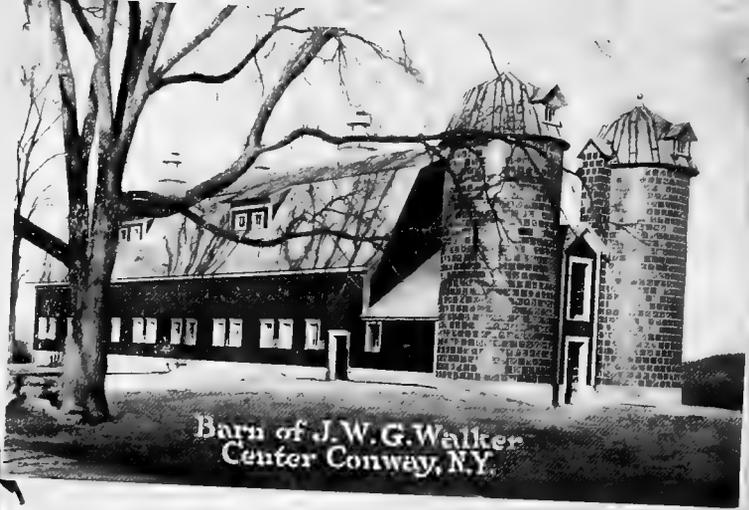

In many a case careful planning has cut the labor of caring for the cows squarely in half, at the same time keeping the stock cleaner, healthier, more contented, and the barn in a more sanitary condition.

How to Build Most Cheaply

To secure these desirable results the cost of the barn need not be extravagant; what the building will cost depends more than all else on the care with which it is planned in advance and the thought that is given to the actual construction. In our experience it has been no uncommon thing to see one man with the "know how" build a barn *at 20 or 30 per cent less cost than another*, although the barn accommodates the same number of cows; and *the first gets a handsomer building, more convenient and better arranged.*

Regardless of who designs the barn, it is well to submit the final plans to several contractors, getting bids from each. By having as many sets of blue prints and specifications as there are contractors figuring on the barn, you can safely let the contract to the lowest bidder, because the successful bidder must follow directions as to workmanship, construction and material.

The Site

Even before plans are drawn, the exact location of the barn should be decided, because the site chosen may alter the plans considerably.

The barn should, if possible, run north and south, as this will permit sunlight to reach all points within, at some time during the day. Sunlight is the best of all disinfectants—the easiest and most certain method of destroying germs of tuberculosis and other diseases.

The barn should be so located that a sheltered yard may be provided to the south of the building.

Consideration must also be given to the appearance from the highways; the position of surrounding buildings; and the location of hills, trees and hedges for windbreaks. Where there is more than one barn the buildings should be arranged as conveniently as possible, to lessen the labor of caring for the stock.

The location should be such that the yard will have natural drainage or can be so graded that the surface water will run away from the barn. A cow will keep herself fairly clean if given a chance, standing in filth only when compelled to do so to secure food or water or protect herself from flies. If the yard is kept dry and clean it will make much easier the task of keeping the cows clean, as well as promote the health and comfort of the cattle.

Many farmers are solving the barnyard problem by covering with six inches of broken stone, placing cinders or gravel on top, a little slope being



Dairy Barn
Equipped the James Way

University of Wisconsin

Crematory
and Dispensary



Barn of E.D. Howe
Marlboro, Mass.



Friends Hospital, Trevose, Pa.
Designed and Equipped the James Way



Barn of Dr. Brock Perry
Happis, Wis.



How this barn would look without Dormer Windows
Friends Hospital, Trevose, Pa.
Designed and Equipped the James Way

given to provide drainage. Occasionally a barnyard is seen that is made of concrete, which has the great advantage of being very easy to keep clean.

Size of Barn

The next thing to be determined is the size of barn needed to accommodate the animals and provide the necessary storage capacity.

Experience has proven certain measurements of stalls, mangers, gutters and passageways to be the most practical. With these measurements and information as to present and prospective size of farm, kind and number of head of stock, system of farming and number of acres in crops, the size of barn required can be quickly figured out.

In almost every case the most satisfactory results are secured by placing the cows in two rows; in the average barn the stalls, gutters and alleys make thirty-four feet inside the most convenient and practical width. For certain purposes the barn is sometimes made slightly wider, but with few exceptions thirty-four feet is best.

It is quite true that this width is not the most economical when the relation of wall space to floor is considered, but any loss in this direction is more than made up in the ease with which the stable work can be performed. The two-row arrangement also permits better ventilation and better lighting.

Individual circumstances must determine whether the barn is to be one-story, a story-and-a-half, or full two stories. The one-story barn is often preferred where barns already built are to be used for storage purposes. The story-and-a-half type provides considerable storage room, particularly if baled hay is used.

The full two-story barn gives far greater storage capacity in proportion to cost.

Roof, floor and stable walls cost practically the same whether the building be low or high, and about the only additional expense to secure the greater capacity is the cost of the second-story walls, which is comparatively small.


A tight ceiling in the stable does away with the principal objection to storage above the cows.

Appearance of the Barn

Barns can be well designed, good looking and practical without additional expense. Such barns will add to the attractiveness of the farm, and make it worth more to any prospective purchaser.

Correct designing—the right lines—has more to do with the pleasing appearance of the barn than any other one thing, although the exterior finish and the relation of other buildings must be considered.


Properly proportioned dormer windows break the monotony of the roof, and add greatly to the appearance of the building.

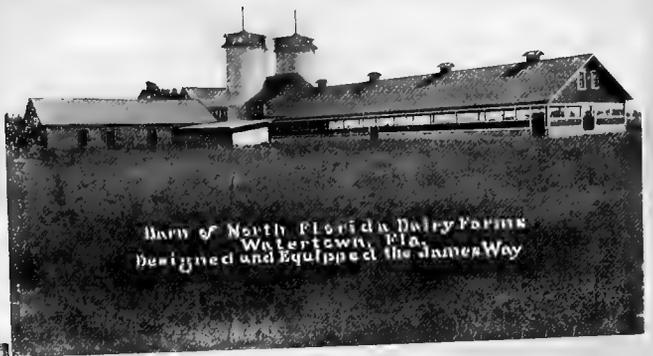

Barn of North Florida Dairy Farms
Water town, Fla.
Designed and Equipped the James Way




Barn of Central Creamery Company
Oakley Calif.
Equipped the James Way

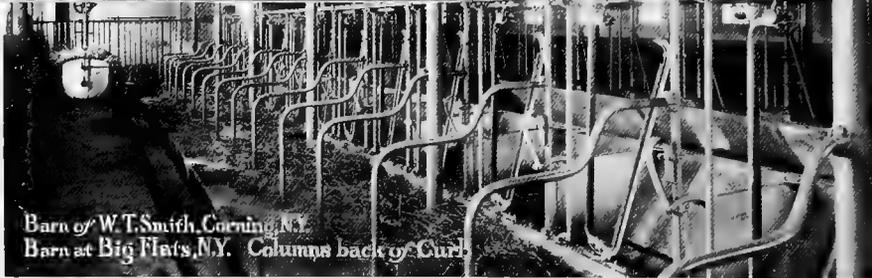

Barn of W.T. Smith, Corning, N.Y.
Barn at Big Flat's, N.Y. Columns back of Curb



Barn of Packham & Gill, Bruce, S.D.
Equipped the James Way

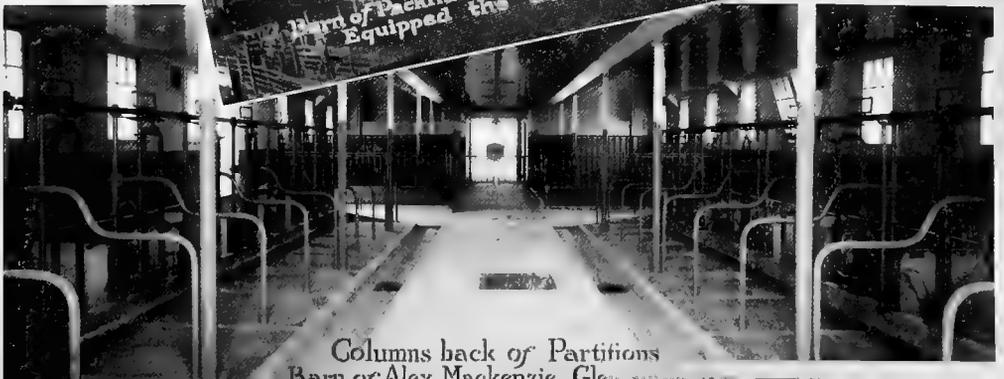

Columns back of Partitions
Barn of Alex Meekopze, Glas...

These dormers also serve the more important purpose of giving light and ventilation to the haymow. You know what it is to mow hay on a hot summer's day, and can readily appreciate the value of ventilation and light in that part of the building.

The ventilators can also be made to add to the appearance of the barn if they are correctly designed, and they can be made to aid in the ventilation of the mow, as well as of the stable.

The Walls

The average height of the stable ceiling should be from eight feet six inches to nine feet, at the walk behind the cows. Of course, as the floor is usually built, this means that the height will be about ten inches less at the feed alley.

A greater height than nine feet calls for more heat to keep the stable comfortable, and is of no advantage in other ways.

As the dairy section extends from the warm south to the cold northwest, the construction should be modified to meet conditions.

In the south, a wall of one layer of siding, tongued and grooved, or battened, is sufficient for warmth, while at the northern extreme, one or more dead air spaces are needed. The barn must be planned according to the climate.

In the south, barns may be built without wooden sides, canvas curtains being provided to keep out the little chill that is sometimes present.

On the other hand, it is almost impossible to keep the stable on the Dakota prairie sufficiently warm when a blizzard is blowing.

When building a concrete basement, the door header should never be placed lower than the mudsills. To do so might make it difficult to put in a carrier outfit, excepting by breaking out the concrete so as to allow the track to pass.

Posts or Columns

In the planning of the barn, one of the most serious things is the arrangement of the posts or columns. These should always be located about six inches in the clear back of the curb, in line with the stall partition; or else just back of the partition.

If a post is located in the stall frame, it interferes with the proper construction of the cement curb; if ahead of the stall frame it interferes with the manger or the alley; if located other than in a line with the stall partition it takes up room out of the stall.




Contrast Posts with Columns in Picture Below



Bar of State Prison
Waupun, Wis.
Designed and Equipped the James Way
Contrast the James Columns



Supporting Posts too Large
Contrast with James Columns in next Picture

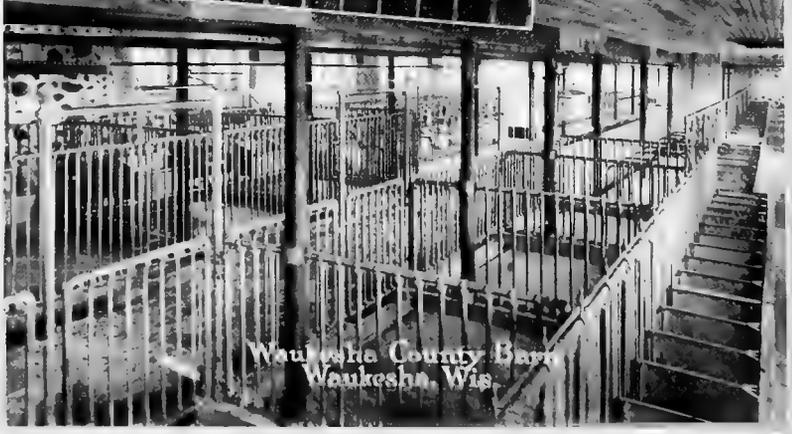

Waukesha County Barr
Waukesha, Wis.

A post six inches back of the stall frame does not interfere with making the curb; or just back of the partition does not interfere with the installation of the equipment.

Dairymen and farmers are finding the James Metal Columns (filled with red granite, torpedo washed sand and Portland cement) far better supports for the barn than wood.

They occupy one-third the space, are fireproof, interfere less with light and with the circulation of air, are neater, more up to date in appearance and are more durable, costing less in the long run than wood. There is absolutely no objection to columns in the stable, providing they are properly located. Columns are less expensive than the trussing required if they are dispensed with—at the same time they leave the haymow clear of obstructions.

The 4½-inch James Column for example, has a safe carrying capacity equivalent to an oak or yellow pine post 6 in. x 8 in.; or a white pine post 8 inches square.

A 4½-inch James Column has a cross section area of 15.9 sq. in. as compared with 48 sq. in. cross section of the oak or yellow pine post, or 64 sq. in. of the white pine post referred to in the above paragraph.

Thus it will be seen that the James Column of equal strength takes practically only one-fourth to one-third the space occupied by the wood posts.

Stable Floors

A good stable floor should be impervious to water that it may be sanitary; it must be easy to clean; comfortable for the cow; and durable in service. It should not rot nor wear out, nor be expensive to construct.

The old-style wood floor had the merit of being warm and easy on the feet of the cattle. It is long since out of date, however, because it soon gets foul, rots out quickly, and becomes unsanitary; is high in first cost; and its life is short—three to five years being the usual life of a wooden floor.

The two materials now widely used for stable floors which can be recommended are concrete and cork brick.

Concrete floors have proven very satisfactory in most ways, meeting every requirement for the dairy barn floor, with one exception—it has been found injurious to cows to stand or lie on its cold, hard surface.

The problem is solved by using concrete for the entire floor, covering the stall floor with cork brick, the cracks being filled with cement. The surface is easily kept clean, is impervious to moisture, warm and easy on the feet of the cattle.



Barn of J. J. Ames
Springfield, N.Y.
Designed and Equipped the James Way.



Barn of Traverse City
State Hospital, Mich.
Equipped the James Way.



Barn of Waaukegan County, Wis.
Waukegan, Wis.
Designed and Equipped the James Way.



Barn of Waukegan County, Wis.
Waukegan, Wis.
Designed and Equipped the James Way.

Material for Concrete Floors

The dirt floor of the stable should be as level as possible, thoroughly tamped and well wet, so that no settling will occur.

It is advisable, before laying the concrete, to spread a foundation of porous material, such as gravel, cinders or sand, evenly on the surface and thoroughly tamp. The depth of this porous foundation will depend upon the drainage of the soil. Where a fill of earth has been provided, this foundation need not be more than four inches thick.

Thickness of Concrete Floor

The usual thickness of a stable floor is four inches concrete grout with $\frac{1}{2}$ inch to 1 inch thick facing on top of the concrete grout.

Proportions of Materials

A mixture of one part of Portland cement, two and a half parts sharp, coarse, clean sand, and five parts coarse, clean gravel is used; for the upper $\frac{3}{4}$ -inch facing one part of Portland cement, two parts sharp coarse clean sand. No loam, dust, vegetable matter or clay should be allowed in the material, as it tends to form a layer over the face and keeps the cement from binding it into a solid mass.

Mixing the Concrete

The water used should be fresh and clean, free from any acids or strong alkalis. The water should not be put in the mixer with a hose, but should be measured, and when the proper consistency has been found, use exactly the same amount for each batch.

The concrete should be mixed in batches. All materials should be first thoroughly mixed dry, after which the water is added and the mixing continued until the concrete is uniform.

Gutter

A properly constructed gutter is very essential to insure strict sanitation. It should have vertical sides, at least four inches deep, to break the spatter, and make it easy to clean with an ordinary shovel. The size of gutter which has proven most satisfactory is sixteen inches wide, six or seven inches deep on the stall side and four inches deep on the other. Often the alley back of the cow is pitched just a trifle, so that the liquid manure and flushing water will run back into the gutter.

Mangers and gutters should be provided with drainage, to be used only for washing out—never for the purpose of removing the manure.



Barn of D. V. Whiteleather
Columbia City Ind.
Designed and Equipped the James Way



Barn of G. W. Frankberg Forcus Falls, Minn.
Designed and Equipped the James Way



Barn of John Howe East Haven Conn. Equipped the James Way



Barn of Wm Fink
St. Charles, Mo.
Equipped the James Way



Barn of S. P. Stevens Bartlett Ill.

Most dairymen now consider it the best practice to preserve the fertilizing value of liquid manure by the use of absorbents, such as cut straw, shavings, etc.

The method of handling liquid manure by draining into a cistern is no longer considered favorably, because of the difficulty in handling.

Plank Frame Barns

There are many types of dairy barns, with many modifications of each type. But of late years the plank frame barn, in one form or another, has become the most popular.

Since its construction is not as well known as some of the other types, we are devoting space to this special class of buildings. The principal reasons for the building of the plank frame barn are:

1. The fact that it saves in cost of lumber.
2. It provides far more storage room in the hayloft.
3. Is much more easily built than any other type, if the correct method of erection is followed.

In building the plank frame barn, ordinarily no piece of timber is used thicker than two inches. Girders, trusses, purlines and tie plates are built up of two or more $1\frac{3}{8}$ -inch to 2-inch planks, four to twelve inches wide if barn is not wider than forty feet.

With the scarcity of heavy timbers and their consequent high cost, it is worth while for farmers to study this newer method of framing.

With the old-style heavy timber framing, the cutting of the mortise and tenon joints required much skill and labor. Since a truss, like a chain, can be no stronger than its weakest point, many of the heavy timber frames are not as strong as they may appear—the joints being only as strong as the thickness of the timber in the tenon.

The girders built up of planks retain the full strength of all of the timber, and are as satisfactory as the solid timber girders of the same area.

The use of modern hay carrying machinery calls for barns with open centers. In the plank frame barn there are no cross beams nor heavy supporting timbers to interfere with such machinery.

With this style of framing one man can do as much work in mowing away hay as three with the old-style frame, there being no obstructions to interfere with and delay the work and it not only requires less help to put the hay into the barn, but it requires less labor to take it out.

This open loft also provides far more storage space.

The photographs and blue prints herewith should make the method of building the plank frame barn quite clear; and if you could see such a barn



in process of construction, you would realize that this type of barn is so easy to build that a skilled carpenter is hardly required to do the work.

H. A. Bennett, Ridgewood, N. J., writes: "We have built a dairy barn from the plans which you prepared for us, and must say that we are well pleased with the plank frame barn; the erection of it was very cheaply done as to labor, and we saved lots of heavy lifting, besides the economy in construction of the plank frame cannot be compared with the old heavy timber frame."

No scaffolding of any kind whatever is needed, and if the right method of raising the trusses is followed, no difficulty will be experienced.

The first step, of course, is the excavation for the foundations, and good practice requires that this extend below the frost line.

Sometimes the first story is built of concrete or stone. Where this is done, the ventilating intake flues may be of tile or galvanized pipe, set in place and the concrete poured or the stone laid around them.

Many object to the concrete wall, however, on the ground that it transmits too much moisture. It is also somewhat more difficult and more expensive to set window frames and intake flues in the stone wall than in frame construction.

The way preferred by many is to build the foundation of tile, stone or concrete to the window bases, completing the first story with a frame wall—2 x 8s or 2 x 10s forming the studding up to the ceiling. With such a wall it is easy to set in the window frames; and the space between the studding gives room for the proper installation of the ventilating intake flues, tapping the outside for the register face, and the inside for the complete register.

By using the joists or other timbers for the concrete forms, the cost of lumber for this special purpose can be saved.


Experience makes it clear that where anything but tile or wood is used for the wall or foundation extended to window level, it must be furred out to give the necessary dead air space. Only in this way can such walls be made satisfactory.

After the foundation is in and the frame for the first story wall completed, the columns are next put in place, the proper footings for same having been provided. It is important that the footings be of ample size; if they are not, the building may settle, cracking the concrete floor and doing other damage.

Metal columns being used, the bottom of the column should be two to six inches below the finished floor line, depending on the method of finishing the floor. When these columns are in place the girders may be laid.

As suggested before, there are two kinds of girders—one of solid timber, the other continuous built up from two-inch planks.

The latter are usually preferable, being stronger because any defects in the lumber are apt to be better distributed. Care must be used to so stagger

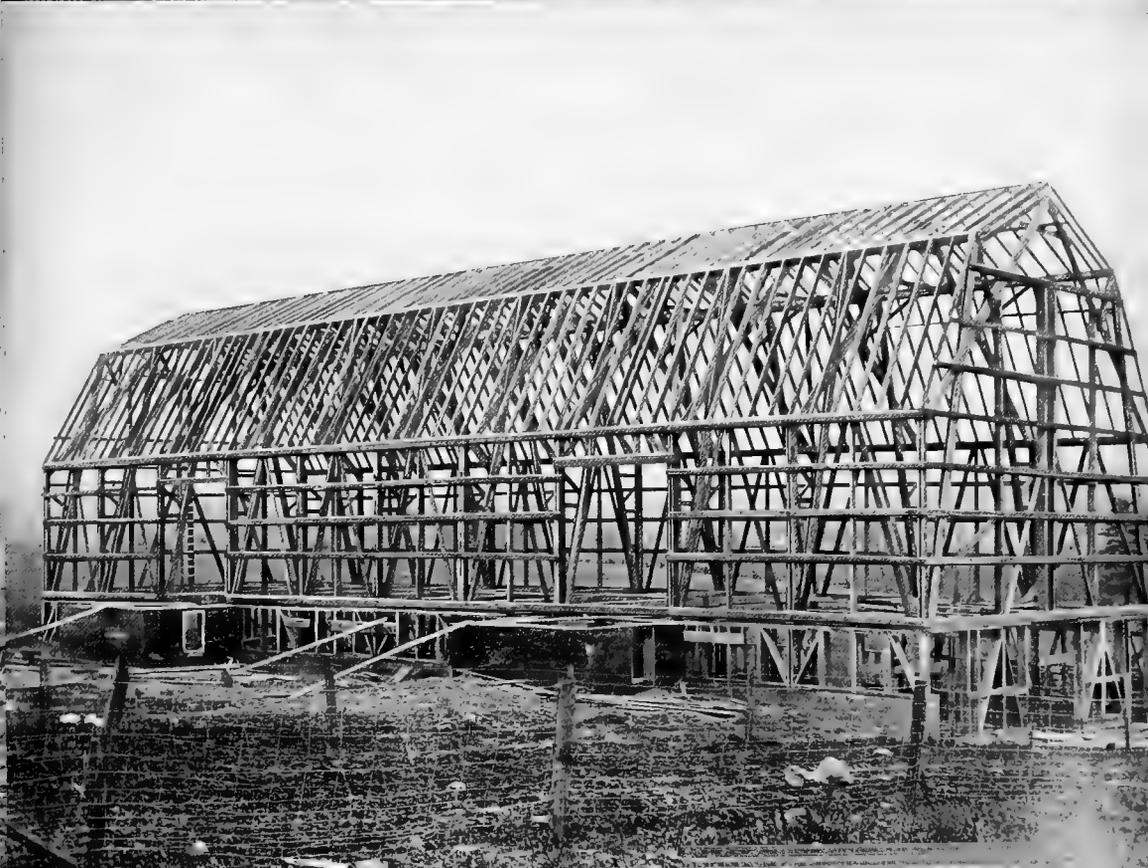

the joints that the girder has uniform strength; the spacing of the joints depending on the distance between supporting posts and on certain other conditions.

The foundation, the frame of the first-story wall, supporting columns and girders all being in place, the floor joists are next put in.

Then a temporary floor of loose boards is laid on the joists, so that the workmen can move about freely while raising the trusses into place.

The plans will show exactly how to cut and put the first truss together—which will look like Illustration 1, page 26. When this first truss is completed, it may be laid out on the floor, and all the other trusses may then be built exactly like it, one on top of the other, thus insuring absolute accuracy.

When all the trusses necessary have been finished, the first truss is placed in position at one end of the barn.

This is usually done by placing the feet of the truss at the places where they are to rest when in position; with the top of the truss toward the center of the barn. Blocks are then spiked to the joists at the proper points, so as to keep the feet of the truss in place while being raised; the feet of the truss resting against these blocks and pivoting on them.

A gin pole (shown in Illustration 3) is erected at the end of the barn in the center, leaning at an angle of about 45 degrees toward the center of the barn; a block and tackle is rigged, the rope passing over the gin pole and attached to the upper parts of the truss. A horse or team is hitched to the block and tackle, and the truss quickly raised to position.

A gang of men can do the same work, but the horse or team is cheaper. A few men with guy ropes are necessary, to steady the truss while being raised.


As soon as this first truss is up, it is braced in position temporarily, as in Illustration 1. The second truss is then raised in like manner, and as soon as it is up the girts are added, as shown in Illustration 2.

Then one after the other the trusses are put in place, the girts being spiked on as you go along. The last two trusses, when laid in position for raising, will project over the end of the barn. The projecting portion is supported by temporary props, which are removed when the truss is being raised. The end girts can be added at any time convenient.


How much simpler than the old-time barn raising, when heavy timbers were in common use. No longer is there need for getting together thirty to forty men for the raising of a medium-sized barn! Today, a half-dozen men will put up the plank frame in less time than thirty or forty could in the old days.

To put on the plates no scaffolding is needed, since it is not difficult to climb up on the truss itself.

Next the purlines are put in place, raised to position with block and tackle.

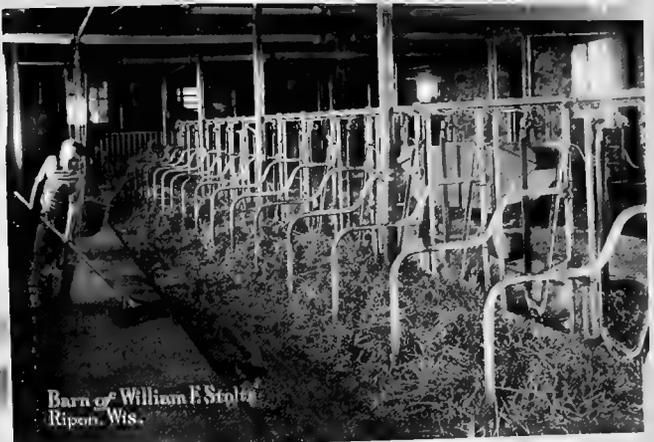

Barn of William F. Stolte
Ripon, Wis.

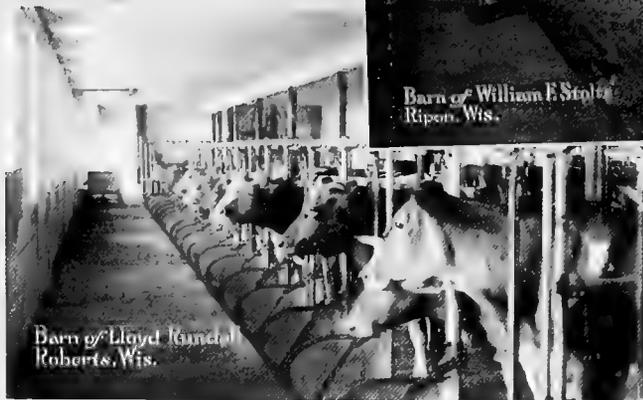

Barn of Lloyd Randall
Roberts, Wis.



Barn of H. F. Marshall
Juneau, Wis.



Barn of John Kramer

Before putting on the rafters and cornice, the siding is nailed on; it can be done more conveniently before the rafters and roof boards are in place, there being nothing to interfere with nailing on the boards under the cornice.

Light

The manner in which a barn is lighted is of importance. A dark barn is bad in several ways. The most important objections are, that it is difficult to keep clean, and is unhealthful. Make the barn sunny, for sunlight is Nature's greatest disinfectant, and of material assistance in keeping the cows healthy. There should be an abundance of windows.

As a rule, four square feet of glass should be provided for each animal in the barn. In cold climates, the windows should be a single sash of what is known as double-glazed windows. Do not run windows crosswise. The vertical window is far preferable.

With a rectangular barn, it is well to have the long way north and south. This will admit more direct sunlight to the stalls for the greater part of the day. Windows placed in the north side of a barn are of little service, for they admit no direct sunlight, which is necessary to destroy bacteria. South windows are always excellent, but, unless numerous, do not admit so much light to all parts of the barn as when placed on both east and west sides.

The position of windows is a matter of importance. Buildings with thick walls require larger windows to admit the same amount of light. It is best to place windows the long way up and down, for they will admit more light than when placed horizontally. They should be flush on the inside, to prevent accumulation of dust.

A single-sash window hung at the bottom is more practical than the double-sash, as the single-sash window can be dropped at the top, and the air as it enters is forced to the ceiling, thereby preventing drafts.

Silos and Silage

Sizes.—As a matter of convenience in helping select the size of silo required, we give below, list of regular sizes, the capacities, and number of stock that can be fed.

Dimen- sions	Tons Capacity	No. of cows it will keep for 6 mos., 40 lbs. per day	Dimen- sions	Tons Capacity	No. of cows it will keep for 6 mos., 40 lbs. per day	Dimen- sions	Tons Capacity	No. of cows it will keep for 6 mos., 40 lbs. per day
8x20	19	4	12x24	50	13	14x30	83	23
8x24	22	6	12x25	54	14	14x34	93	26
10x20	23	7	12x28	57	15	16x22	81	23
10x22	31	8	12x30	60	16	16x24	85	25
10x24	34	9	12x34	68	19	16x26	95	26
10x26	37	10	14x22	62	17	16x28	102	29
10x30	43	12	14x24	67	19	16x30	108	31
12x20	40	11	14x26	72	21	16x34	110	31
12x22	45	12	14x28	78	22	16x38	122	33



North of U.S. Indian School
Elyria, Minn.
Designed and Equipped the James Way.




Hog Barn for Brood Lows Farm
Newtown Square, Pennsylvania
Equipped the James Way






Farm of T. E. Gerschner
Hampshire, Ill.
Designed and Equipped the James Way




Farm of C.D. Stinson.
Hollywood Wash.
Equipped the James Way.

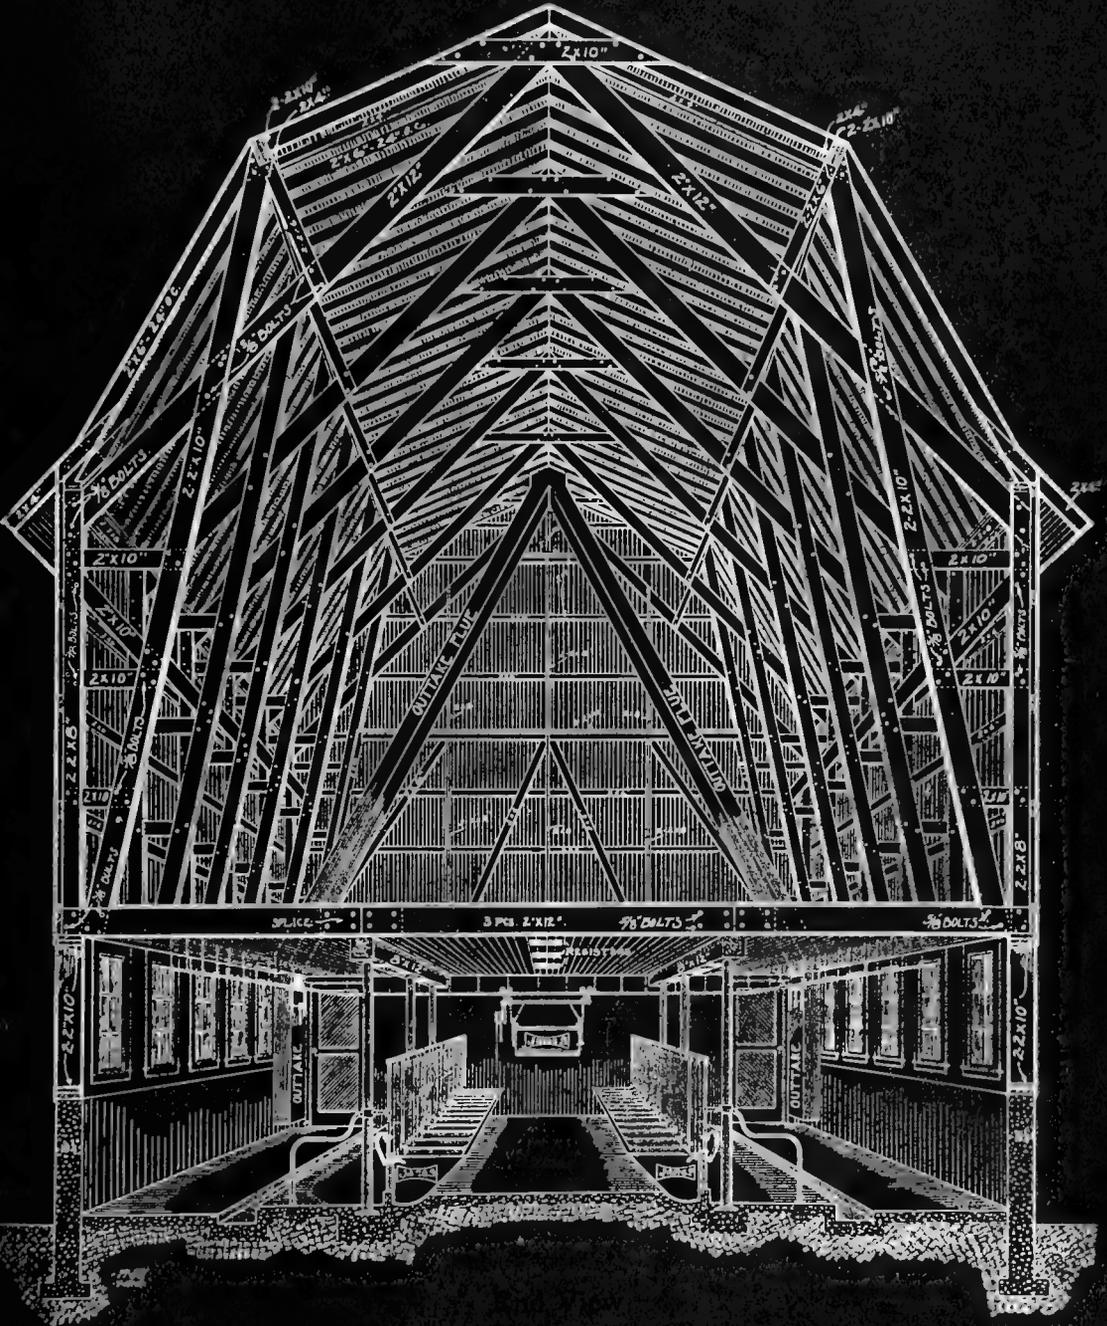


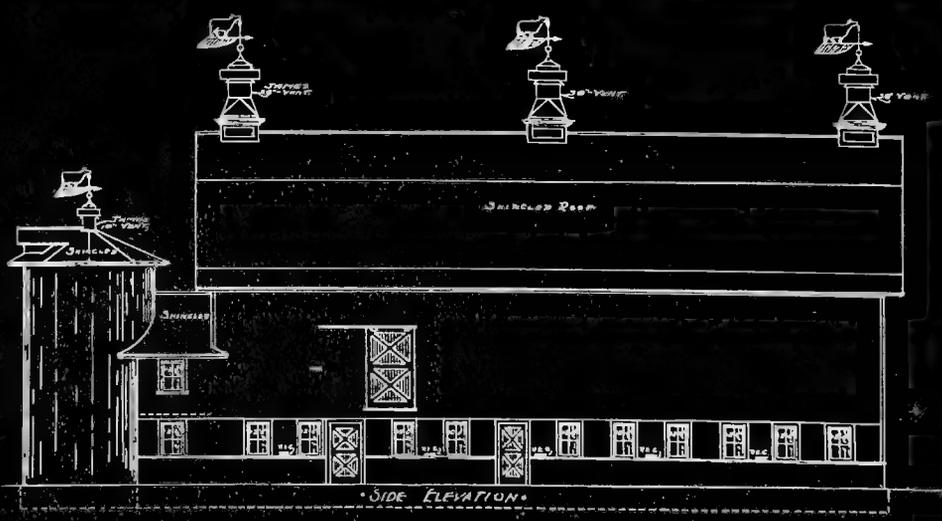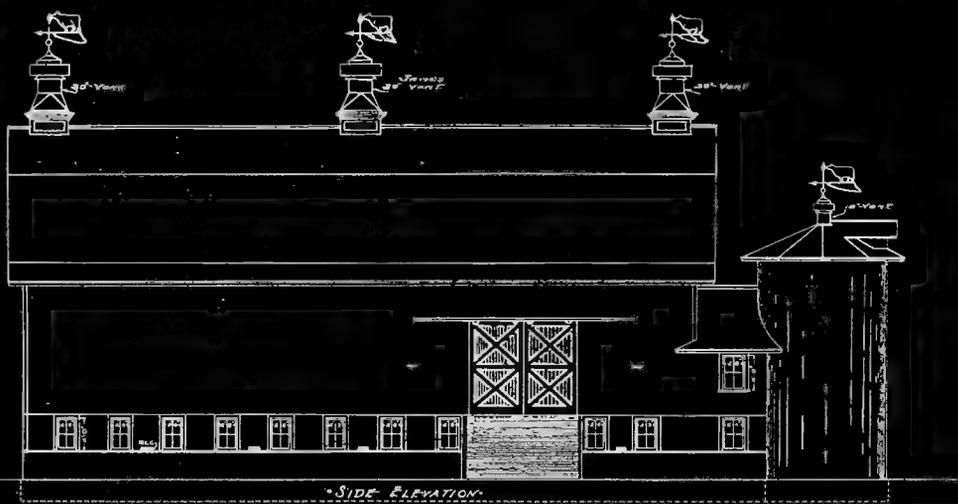

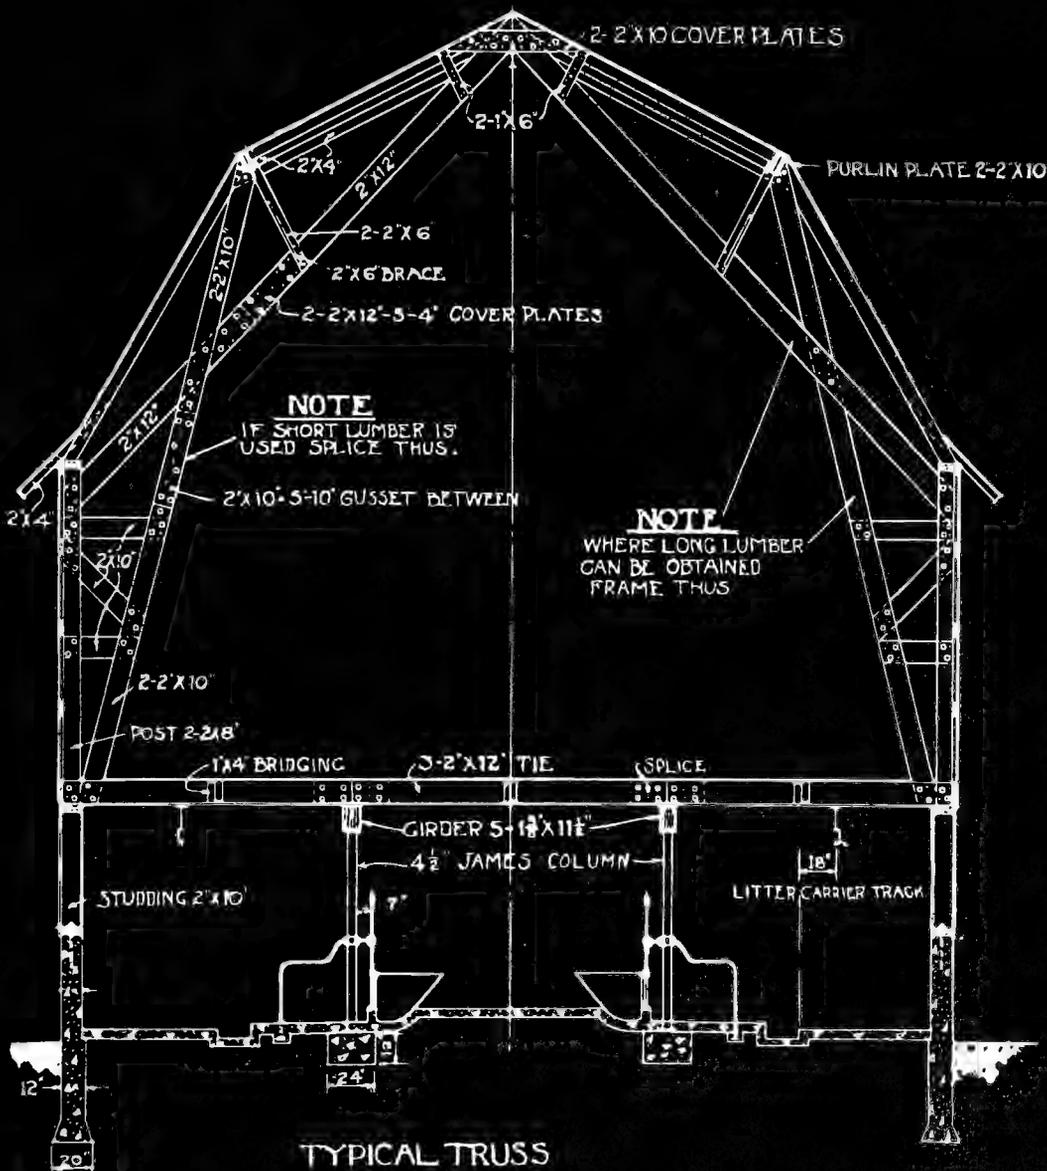


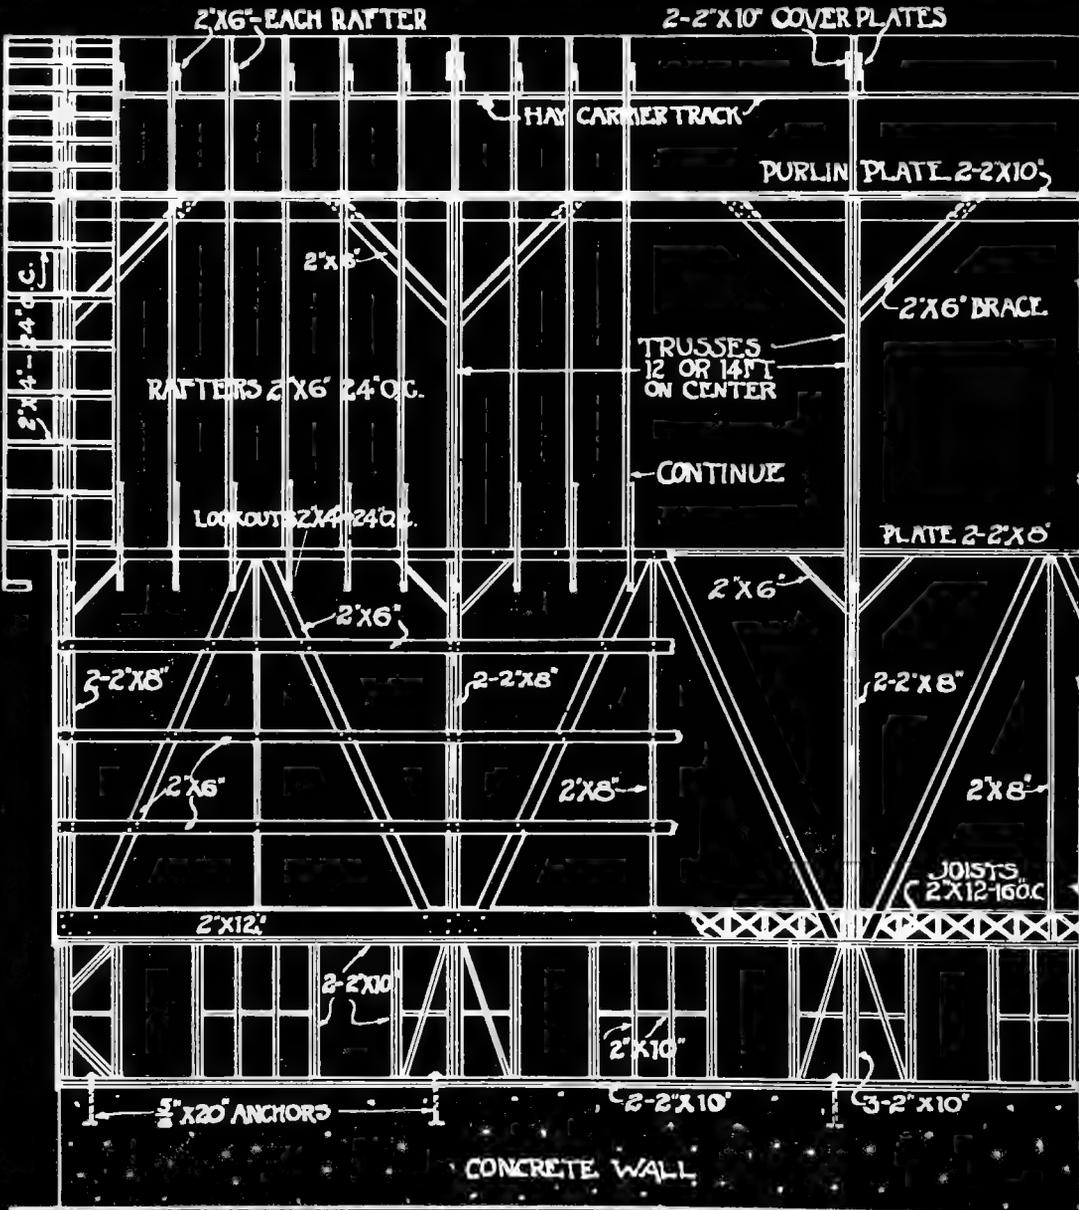




SIDE ELEVATION OF FRAMING

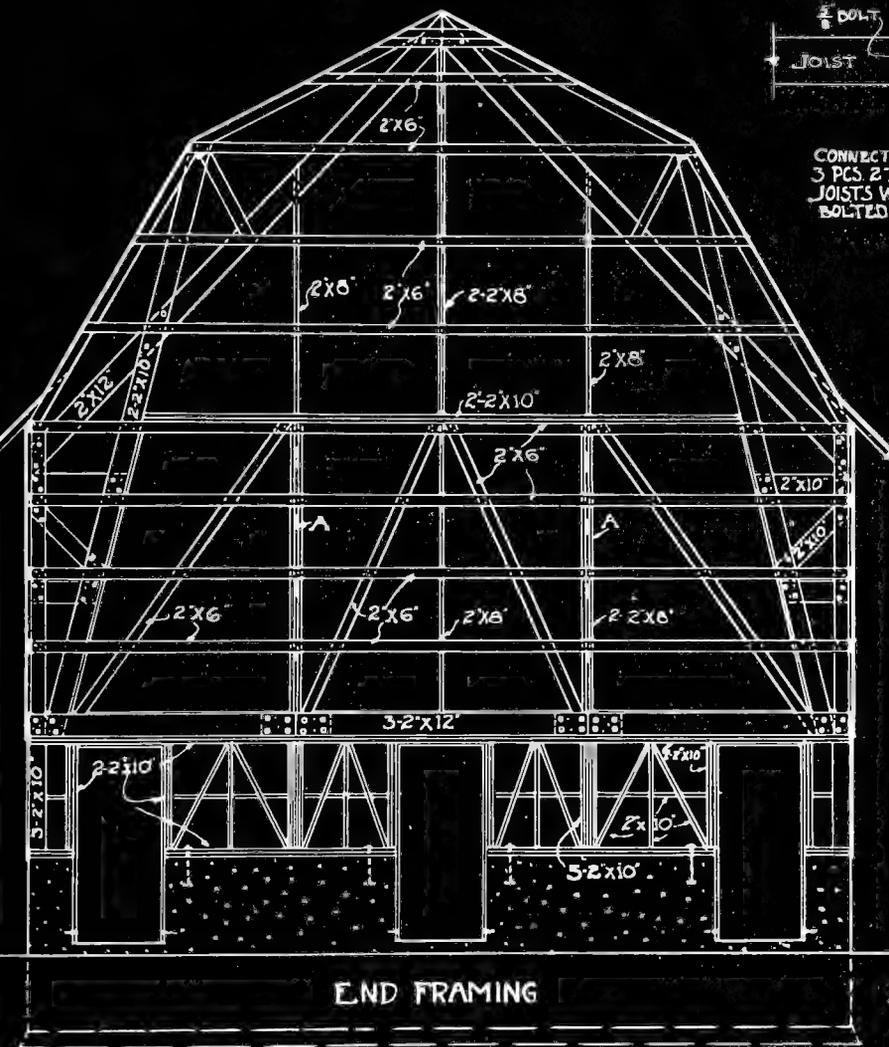


CONNECTION AT B
 3 PCS. 2x12 BETWEEN
 JOISTS WELL SPIKED AND
 BOLTED TO STAY




END STAYS 'A-A'

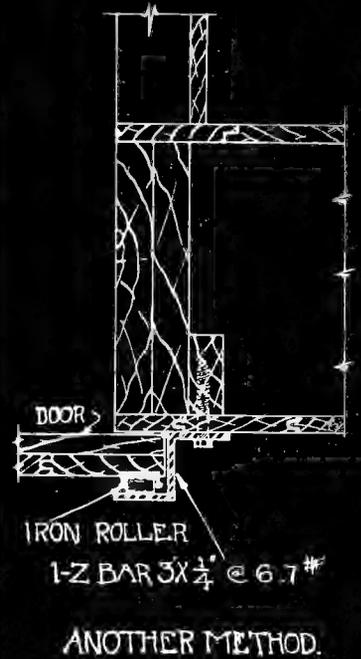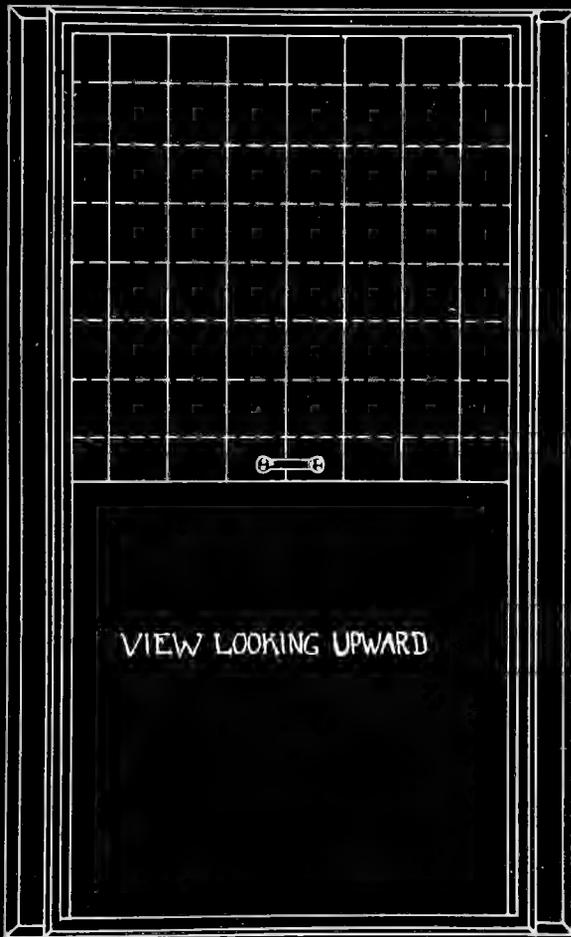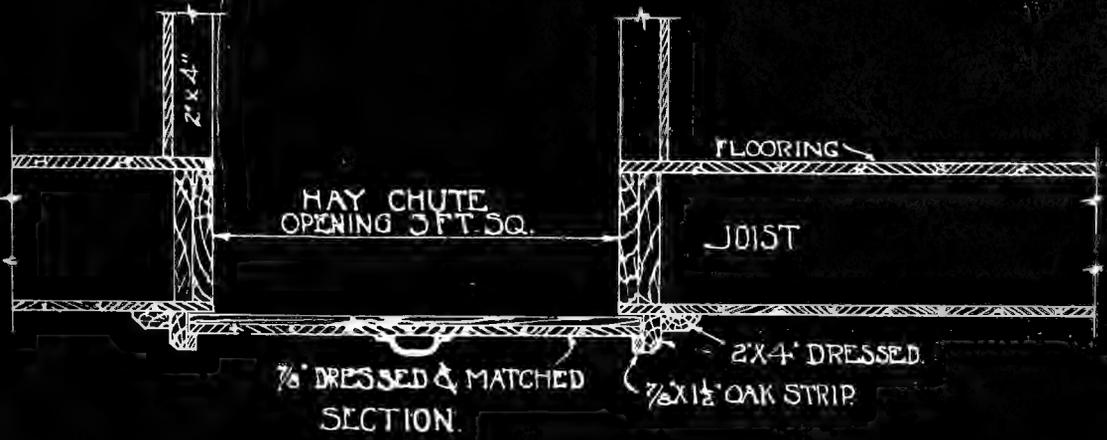


SLIDING DOOR FOR HAY CHUTE OPENING IN CEILING.

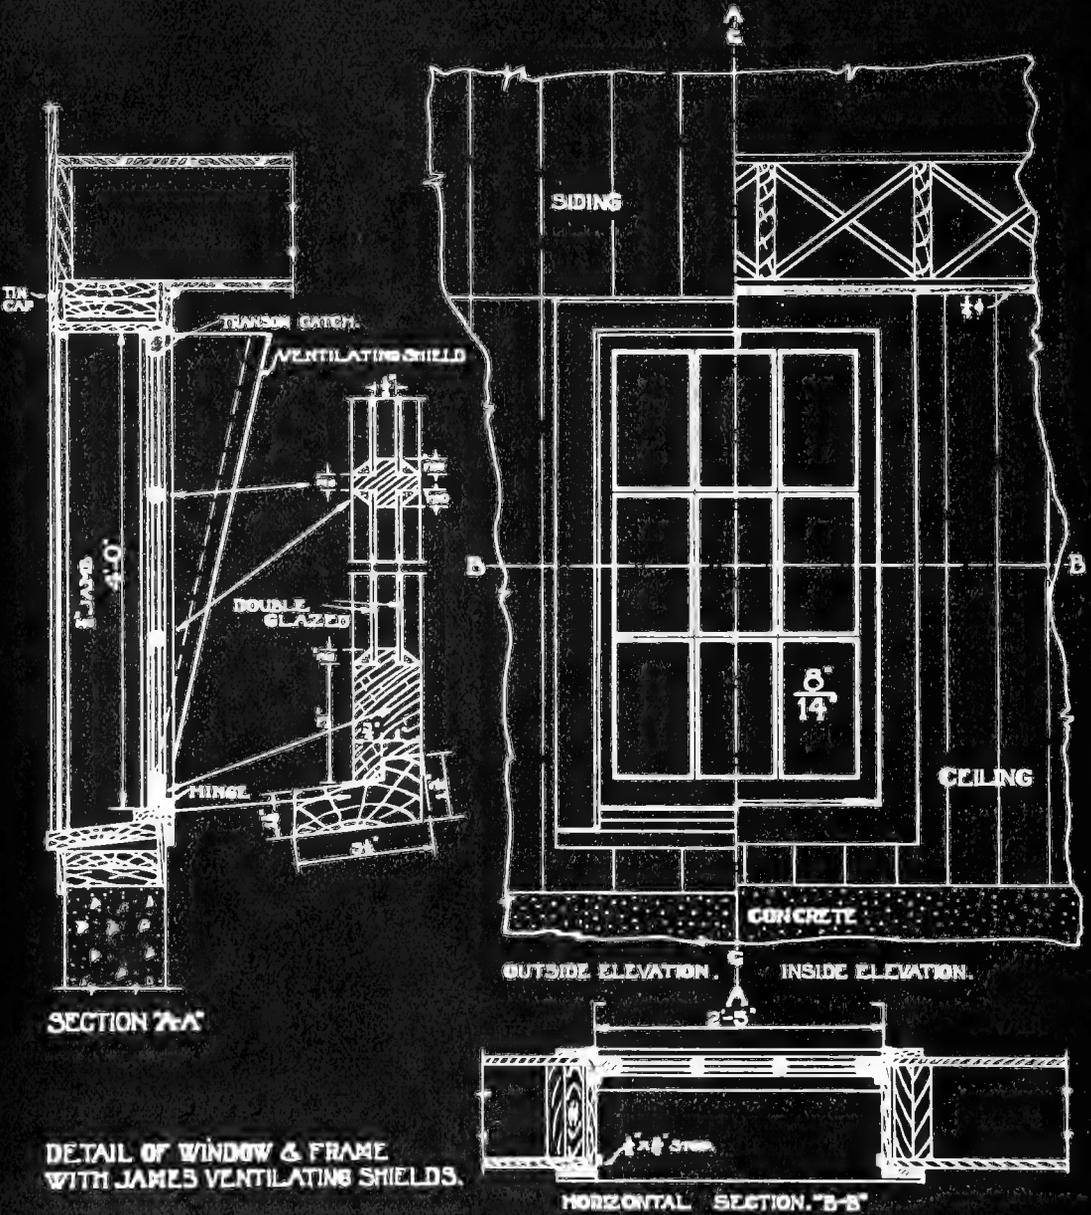



DETAIL OF WINDOW & FRAME WITH JAMES VENTILATING SHIELDS.

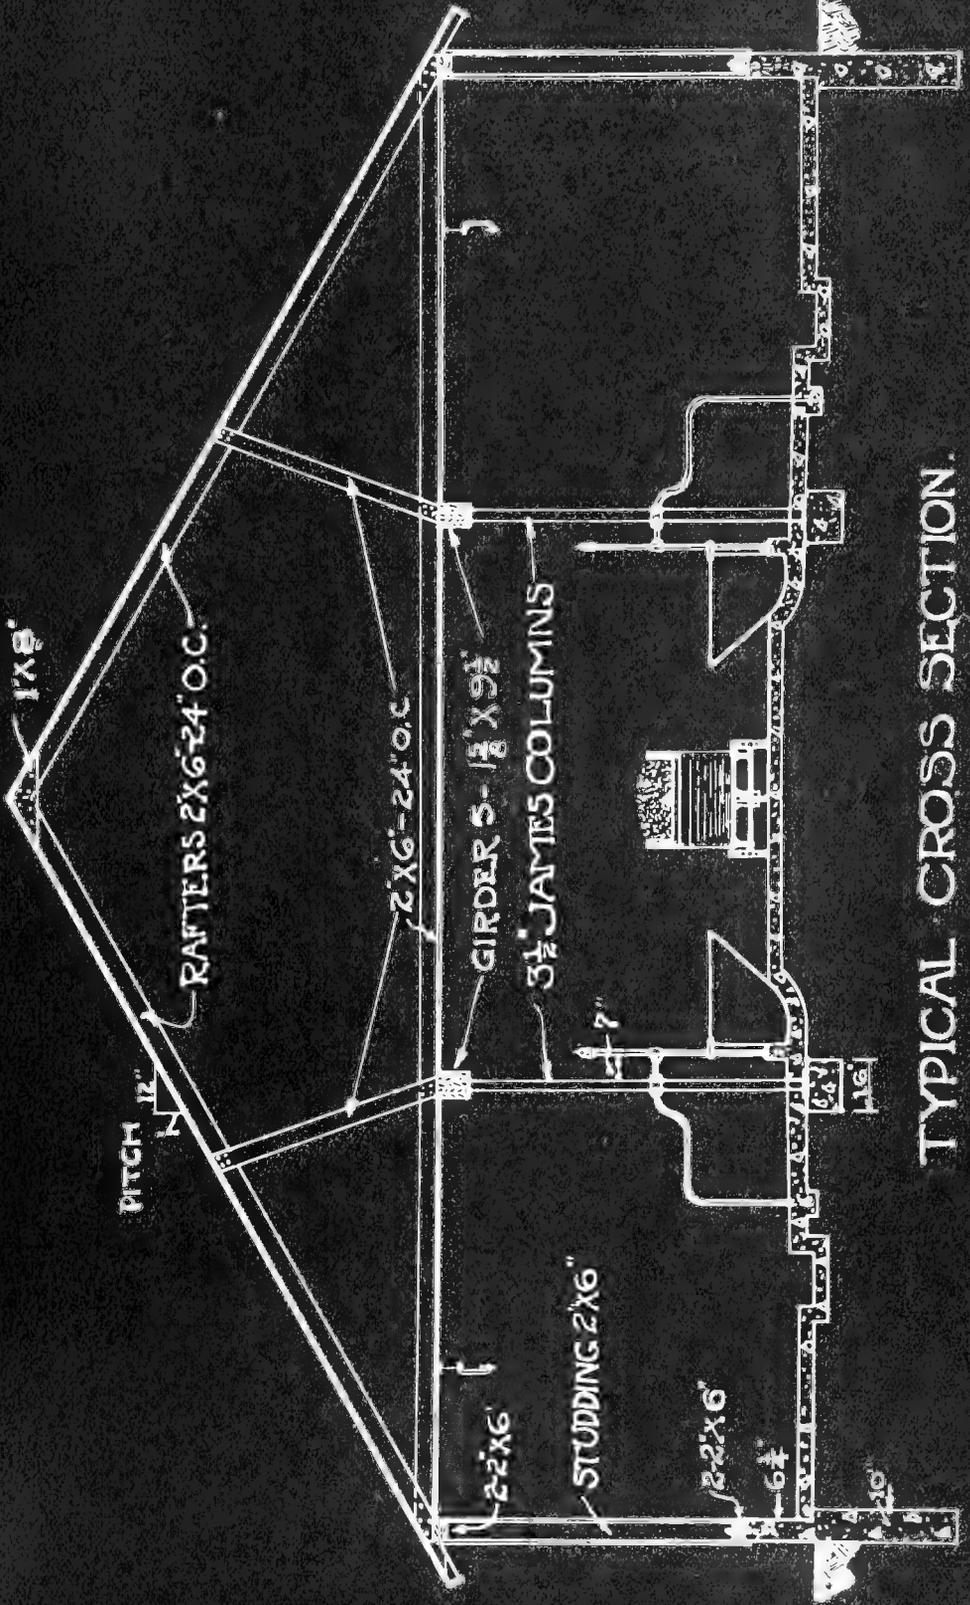



TYPICAL CROSS SECTION.

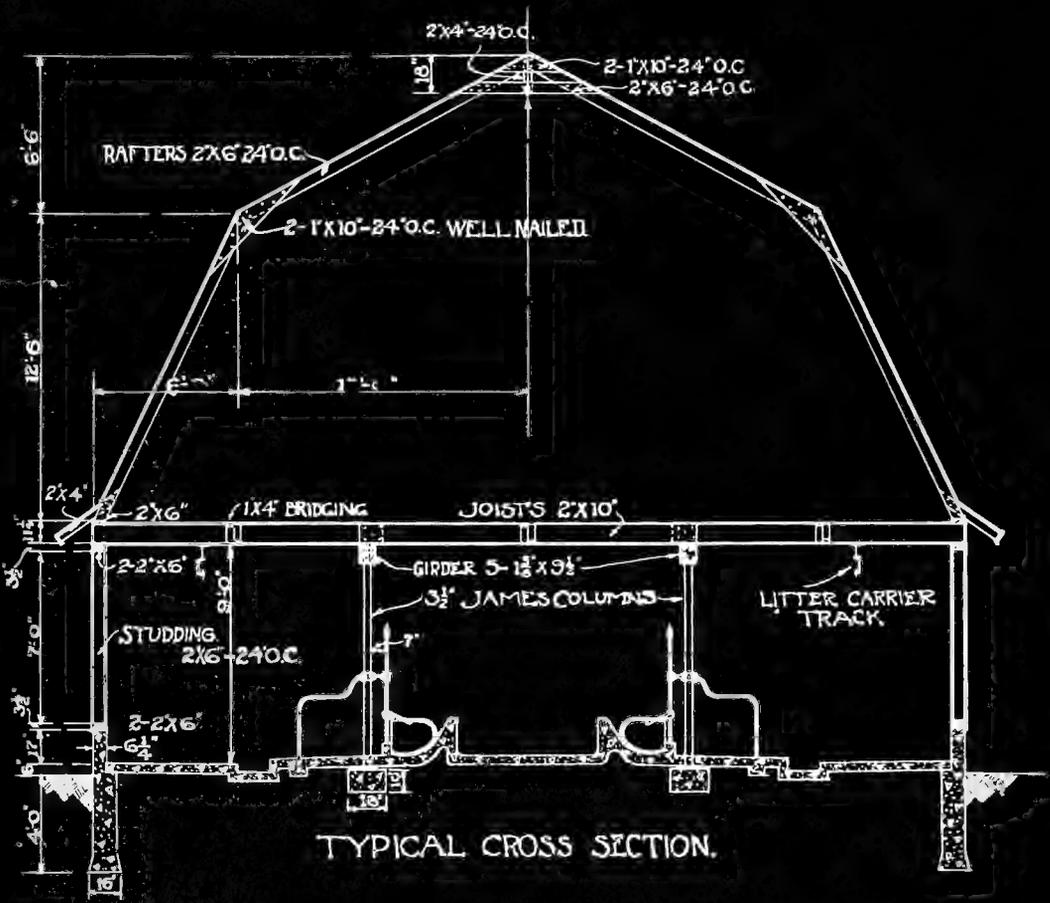


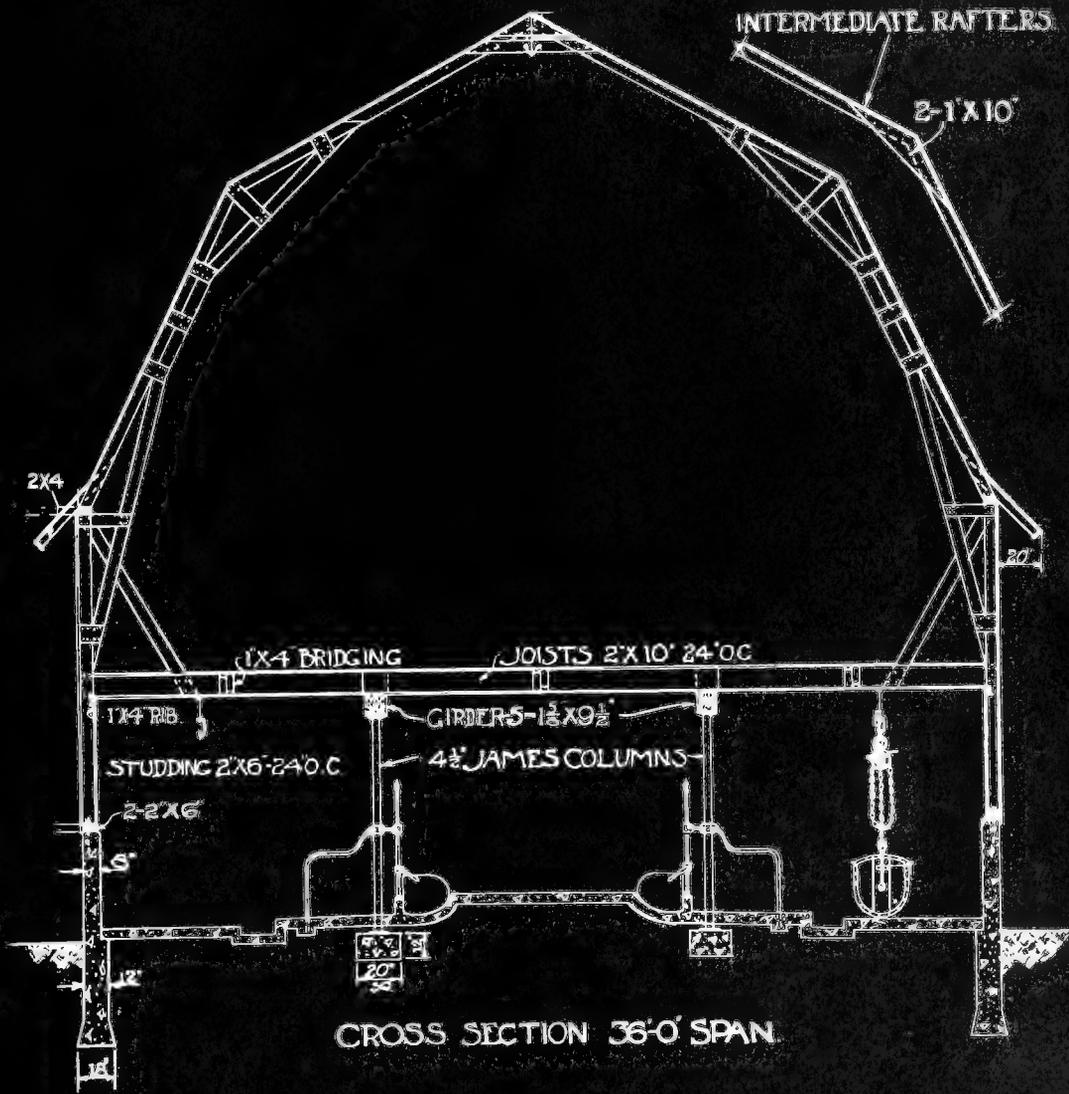


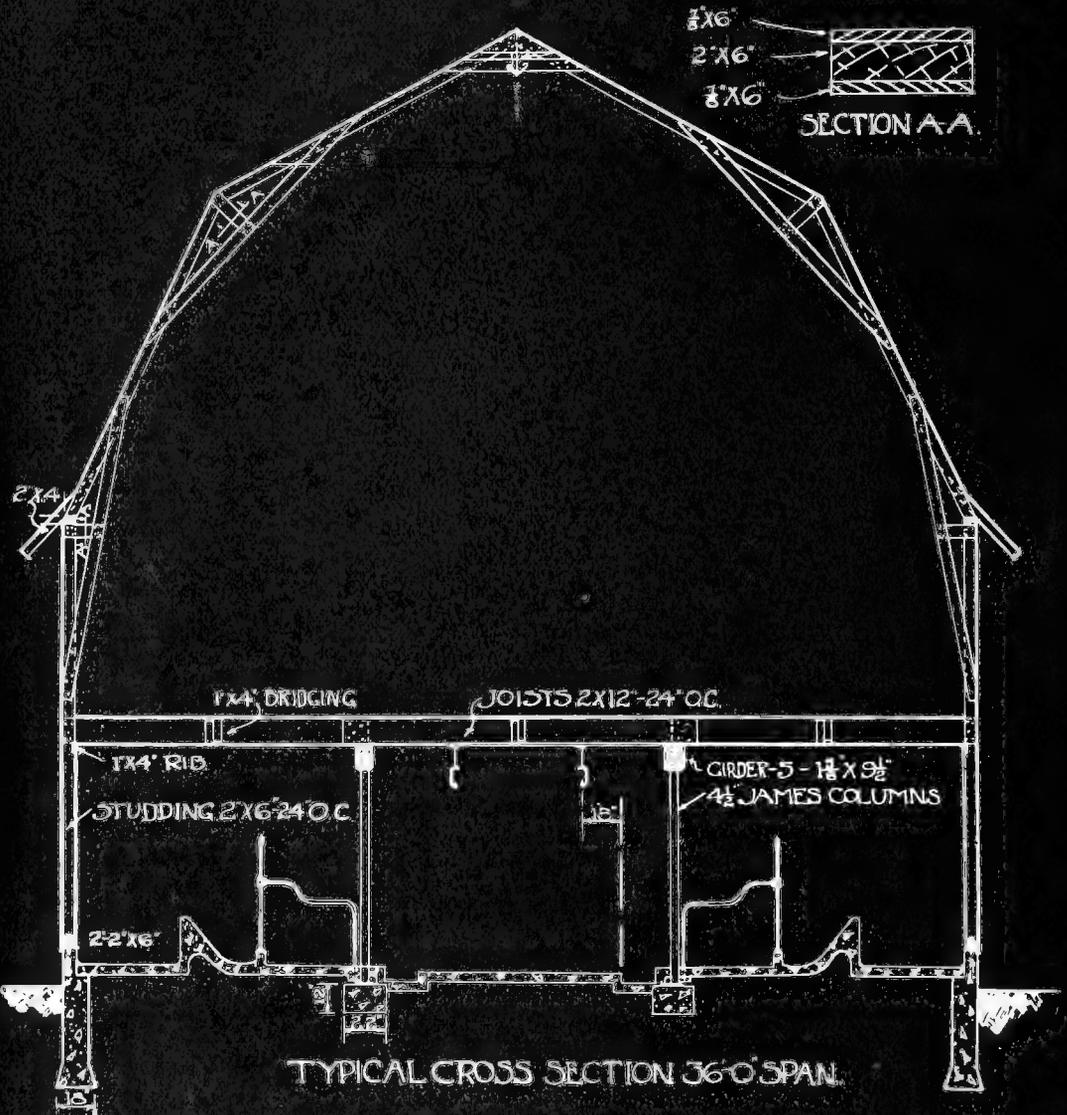

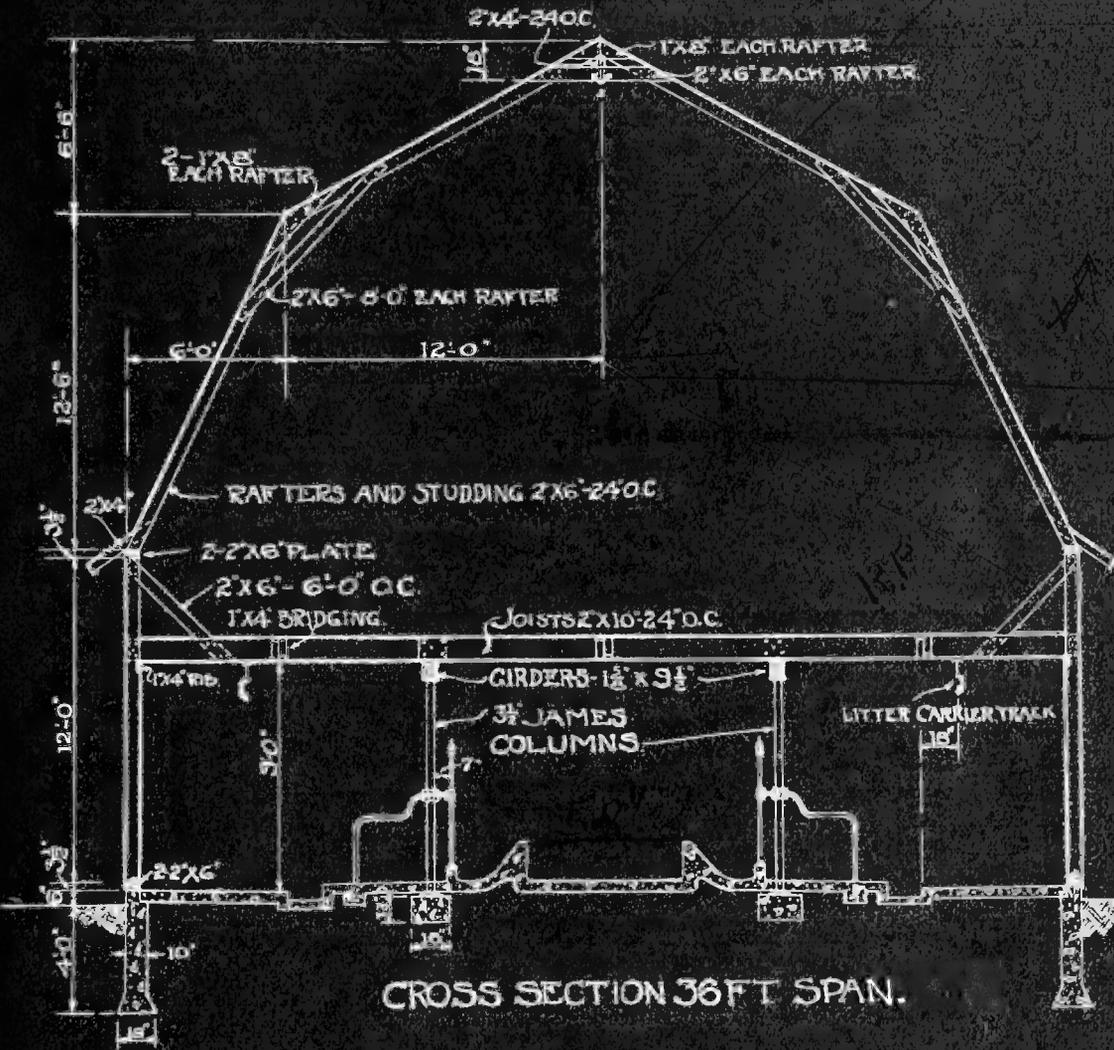


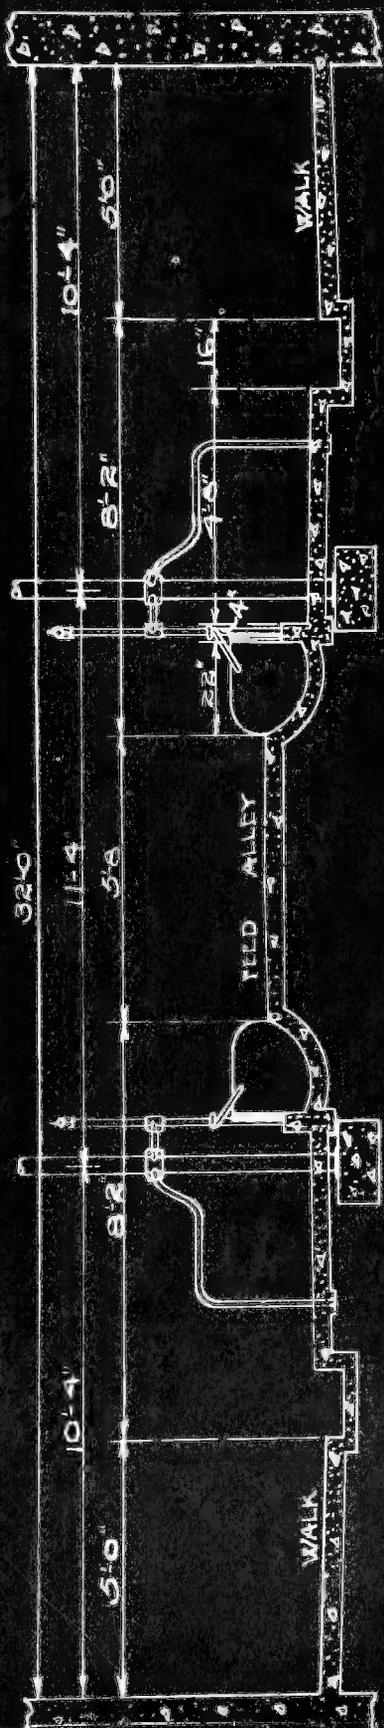


Back Out

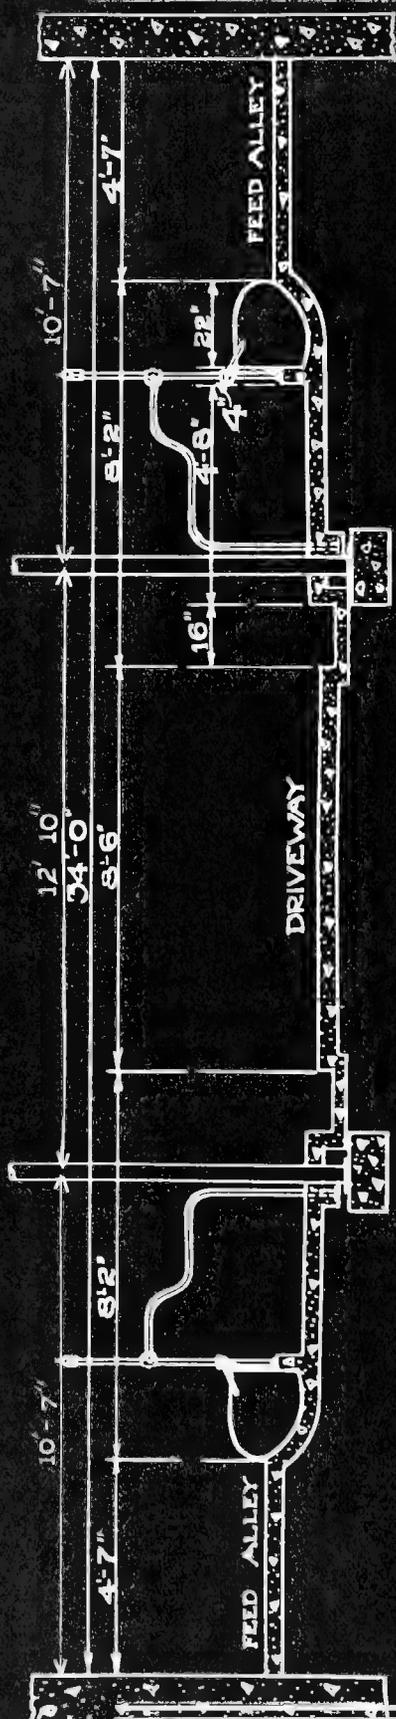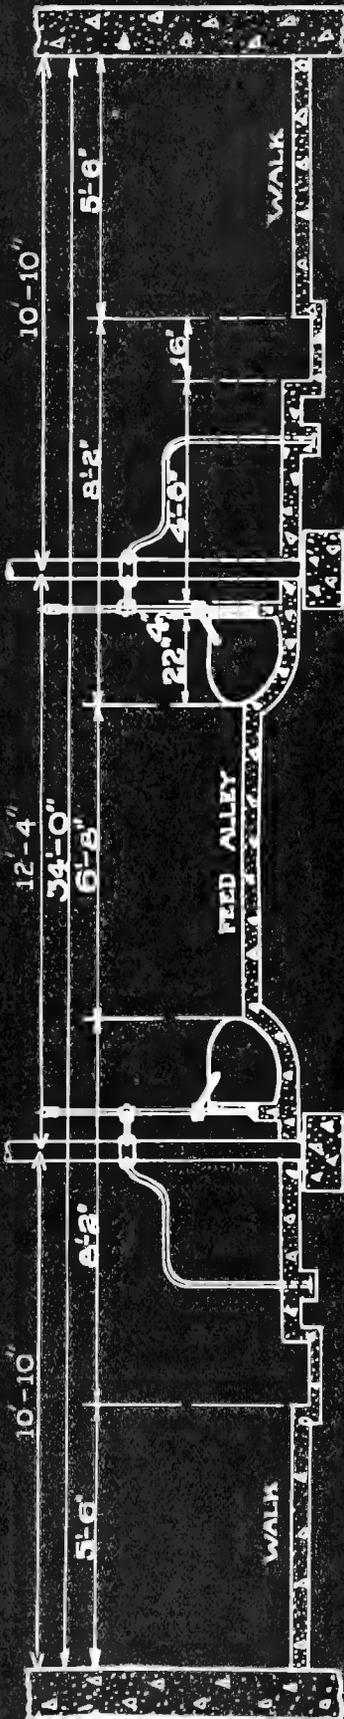


30-ft. Barn

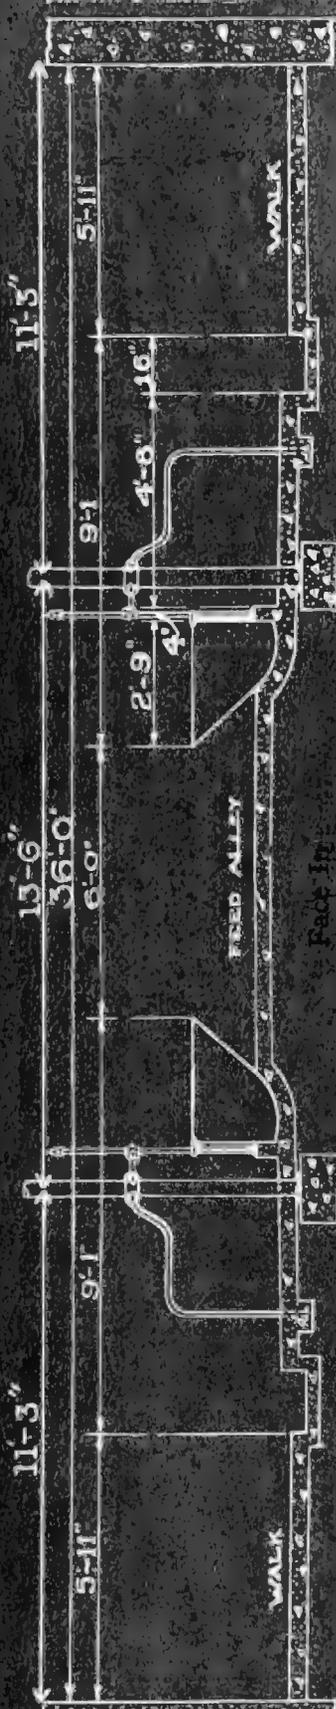


Face In

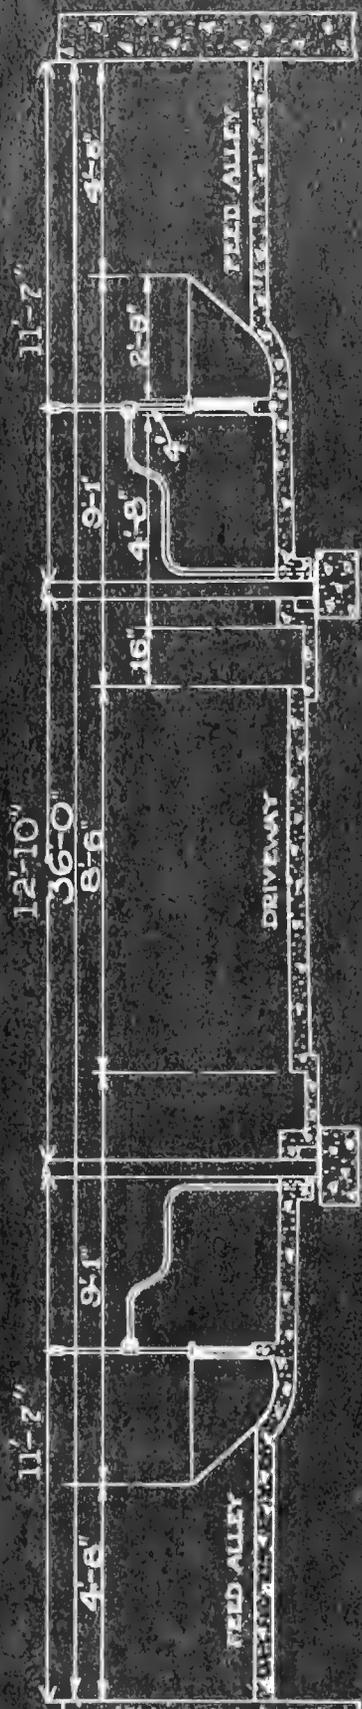



Face Out

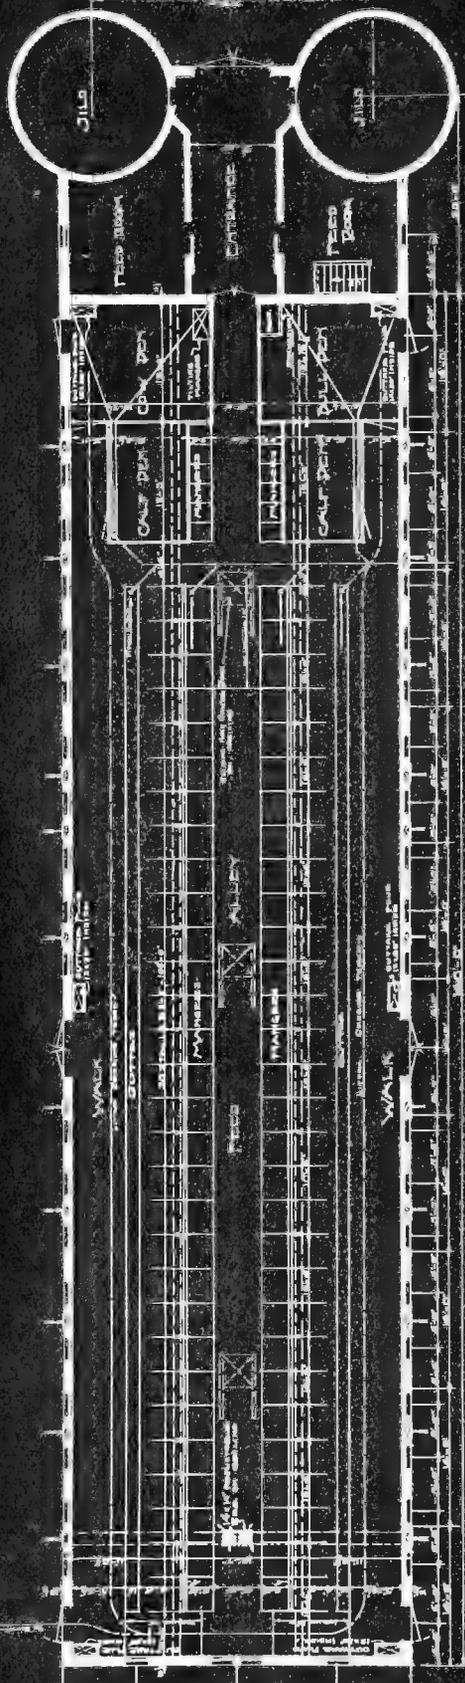

First and Second Floor Plans
A Typical Barn

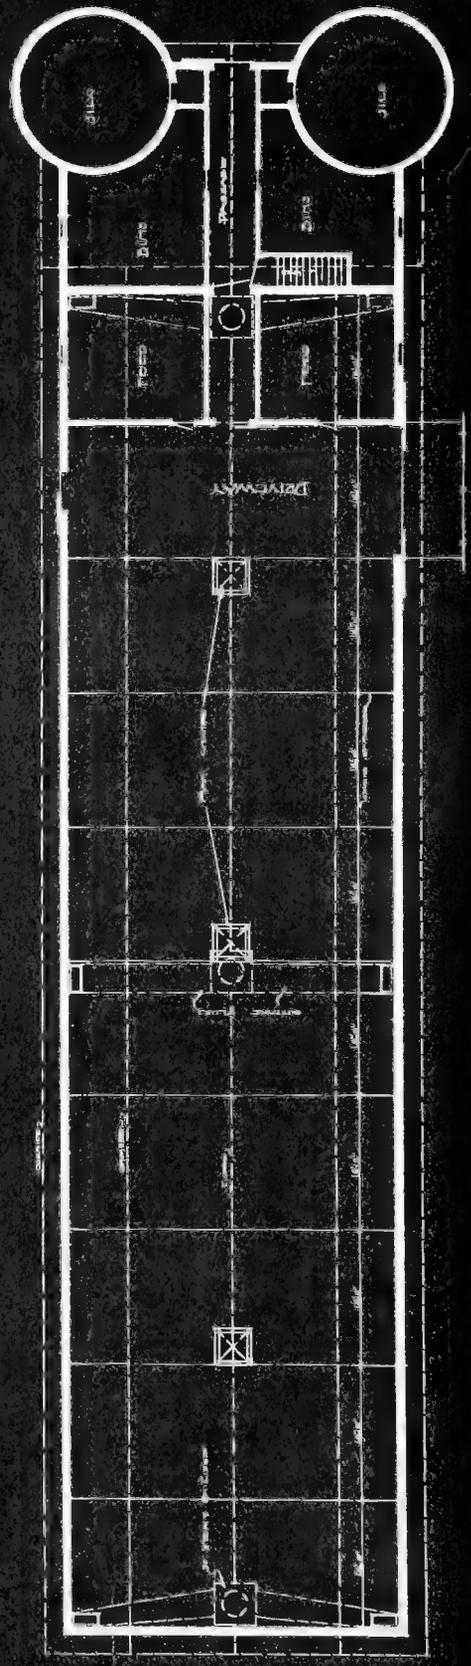

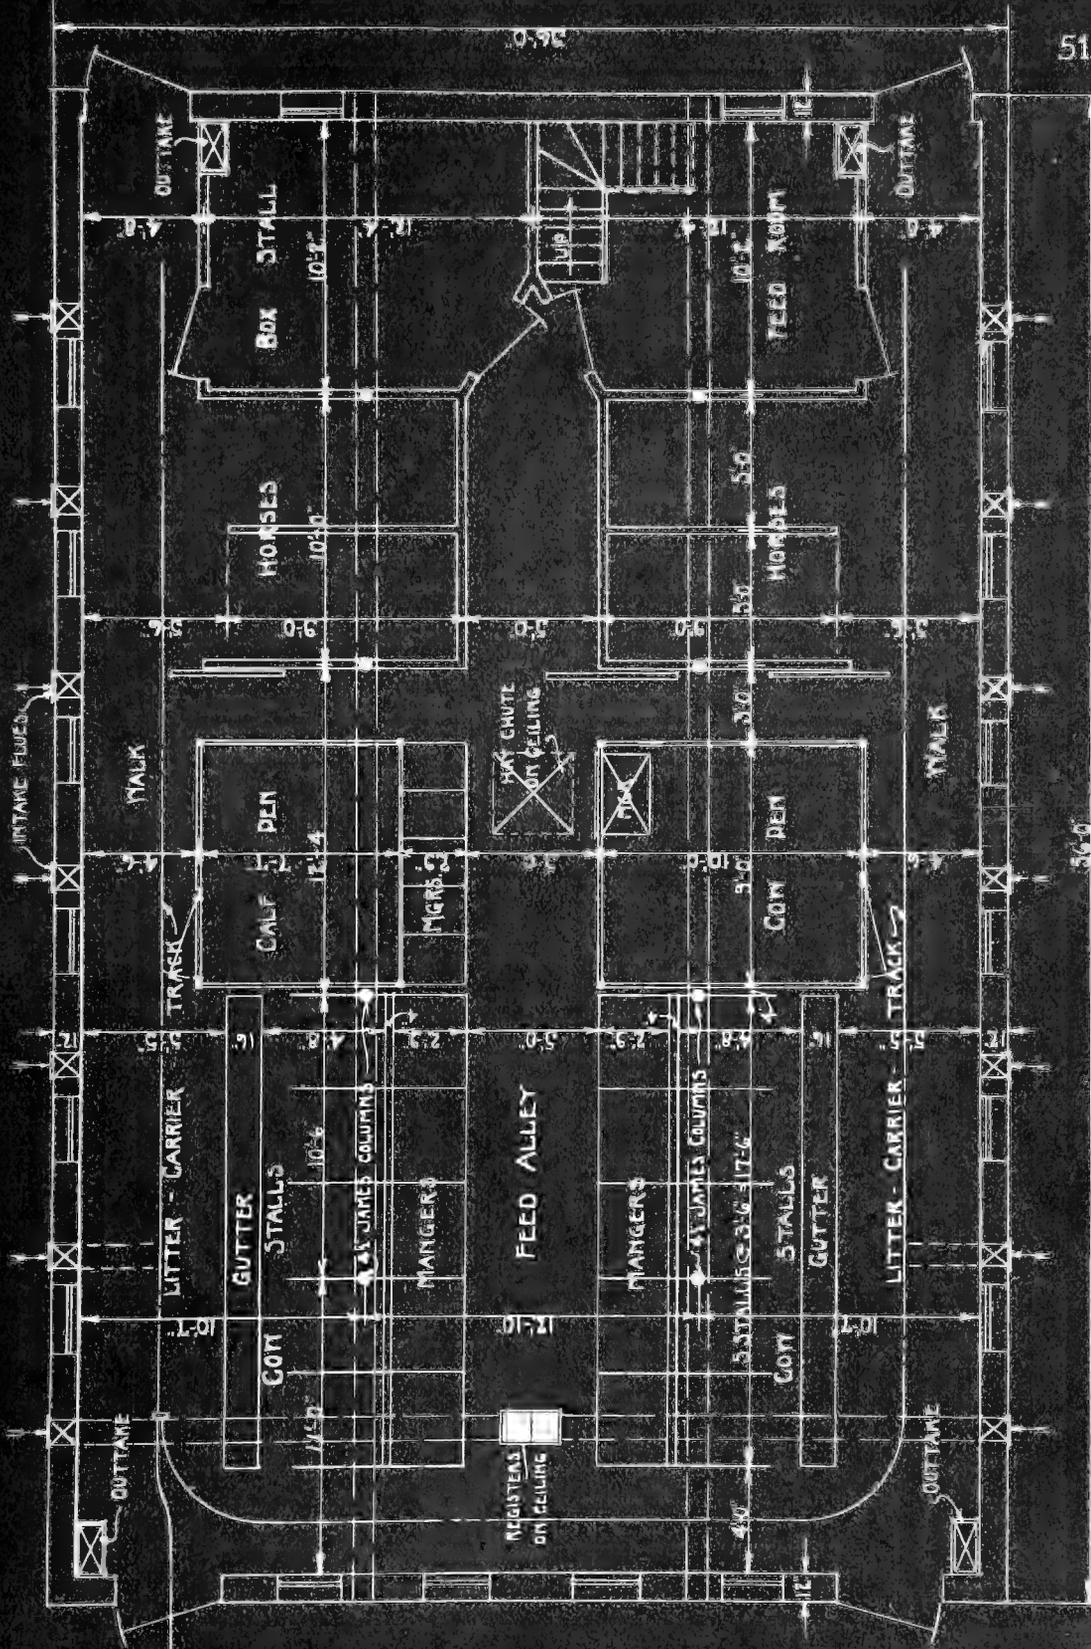

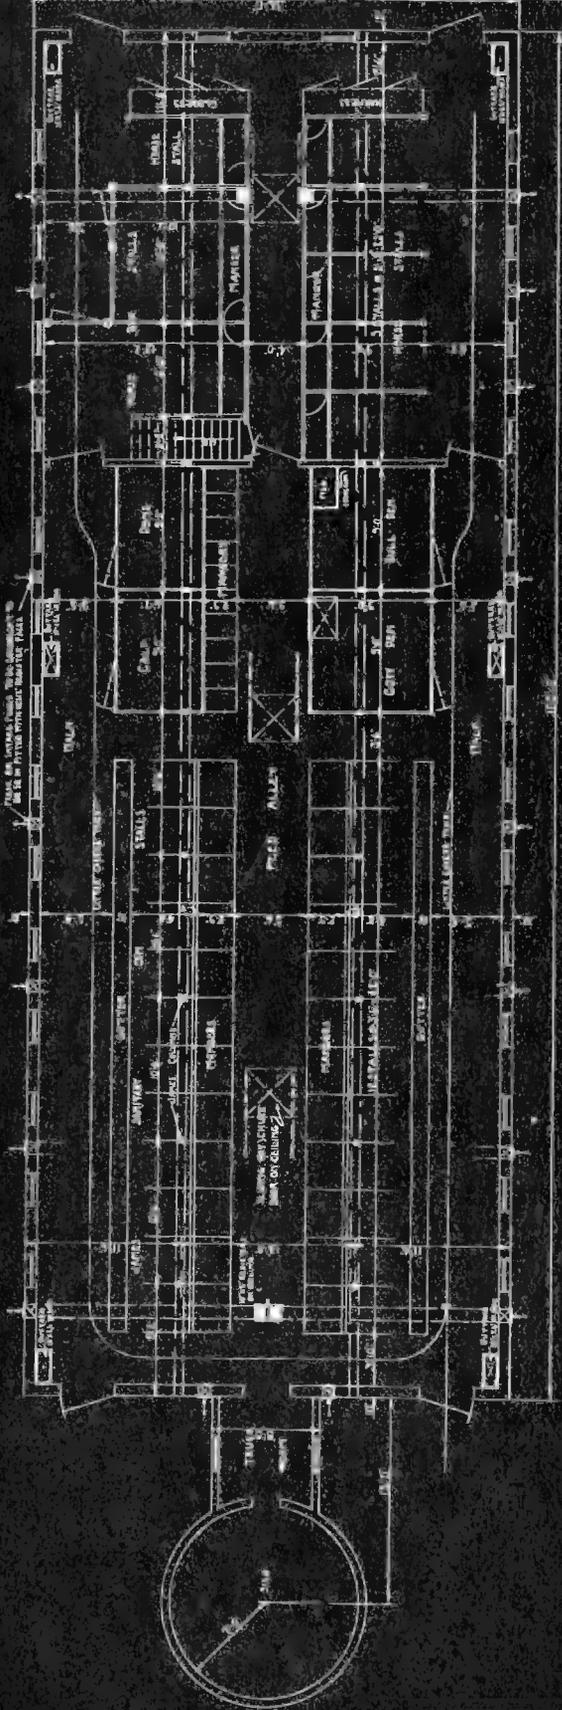

Ventilation

RIGHT here at the start, get this fact fixed in your mind—that VENTILATORS ON YOUR BARN DO NOT NECESSARILY MEAN THAT YOUR BARN IS VENTILATED.

—and remember this point too—that SOME ventilation is not *enough* ventilation.

Just look at the fallow, sickly people who live in city tenements. They are getting SOME air, but they are not getting ENOUGH.

Study a map showing where the tuberculosis cases are located—you will find these same tenements, hotbeds of the disease—all because of the lack of ENOUGH oxygen—PURE AIR—VENTILATION.

Just look at yourself with your rugged constitution, strength and vitality, in comparison with the city office man. You can see that *some* ventilation is *not* enough, either for men or animals.

—as long as you hope to make a cent of profit in the dairying business you will remember this fact—that *milk and butter fat production depends absolutely and completely on cow health and vitality.*

So it is nothing less than a sacrifice of success and profit to supply your barn with anything less than a GREAT ENOUGH QUANTITY OF FRESH, PURE, DUSTLESS AIR.


Every dairyman is constantly studying to supply the proper milk-making ration, yet health and proper digestion depend, first of all, on the adequate supply of fresh air, constantly.


Every dairyman is on the look-out for cow-tuberculosis—he will go to extremes to prevent it—yet do you realize that the only treatment and cure for tuberculosis is fresh air? That is the way the medical authorities treat people in Sanitariums—make them live out doors! It is the same disease in cows, so you can be sure that abundance of fresh air, the only known cure for tuberculosis, is also the best preventive. The right barn ventilation is your best protection.


You have made an investment in your barn, and moisture is the one thing that is causing decay through the entire structure, and deterioration of hay and other forage. The moisture laden air breathed out from thirty cows will saturate the air of the barn with one and one-third barrels of water daily, to say nothing about moisture from other sources. *Correct ventilation takes out excessive moisture.*

That white coating which you see on harnesses, buggy tops and barn beams is ammonia carbonate, formed by the carbonic acid gas from air which has been breathed uniting with the ammonia vapors from manure. It rots everything. *Real barn ventilation takes ammonia carbonate out of the barn.*

Don't rest content in the belief that your barn is ventilated. Cupolas and ventilators on top of your barn do NOT mean ventilation inside your

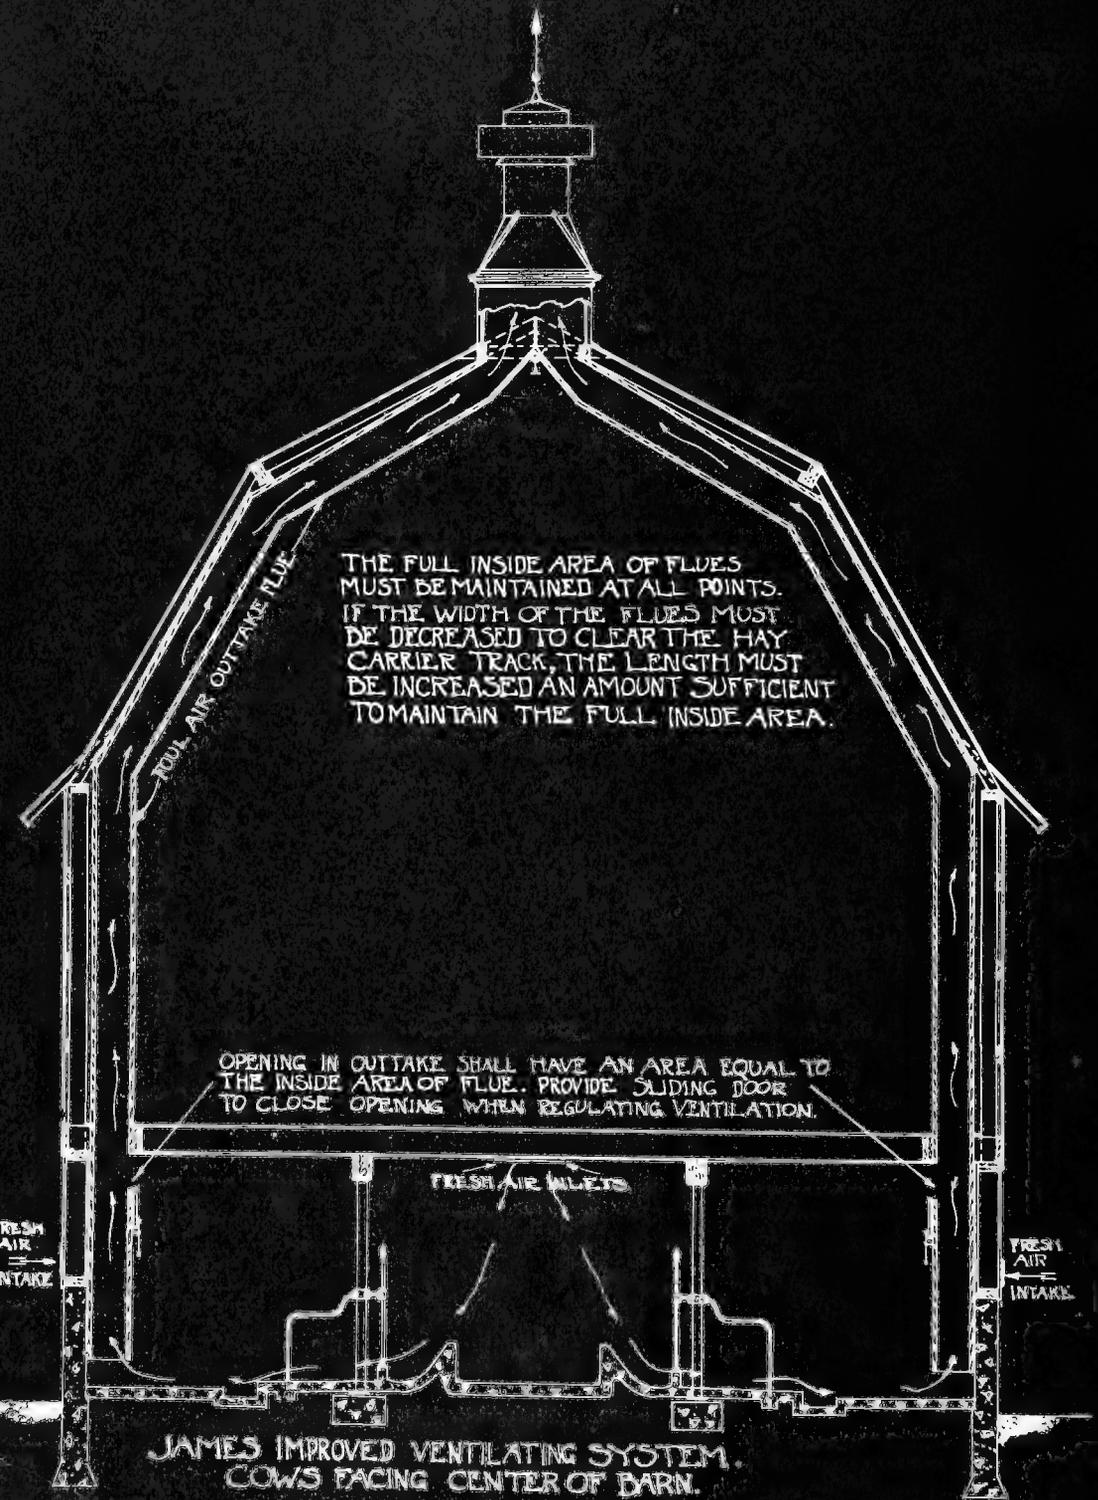

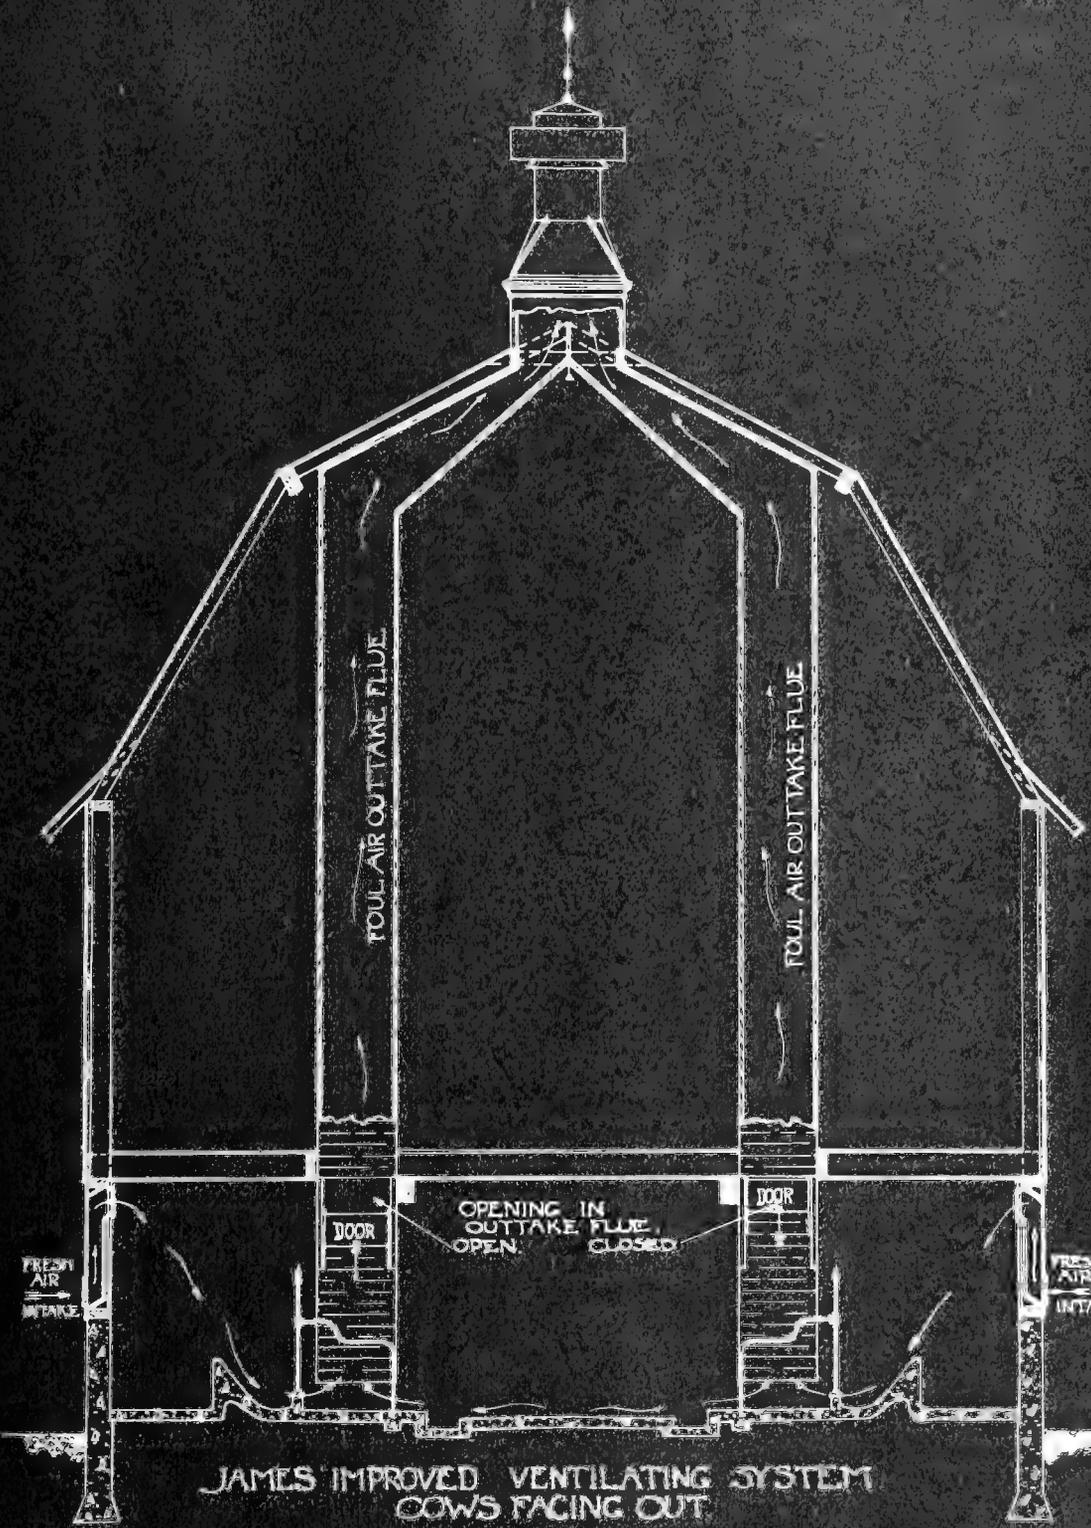

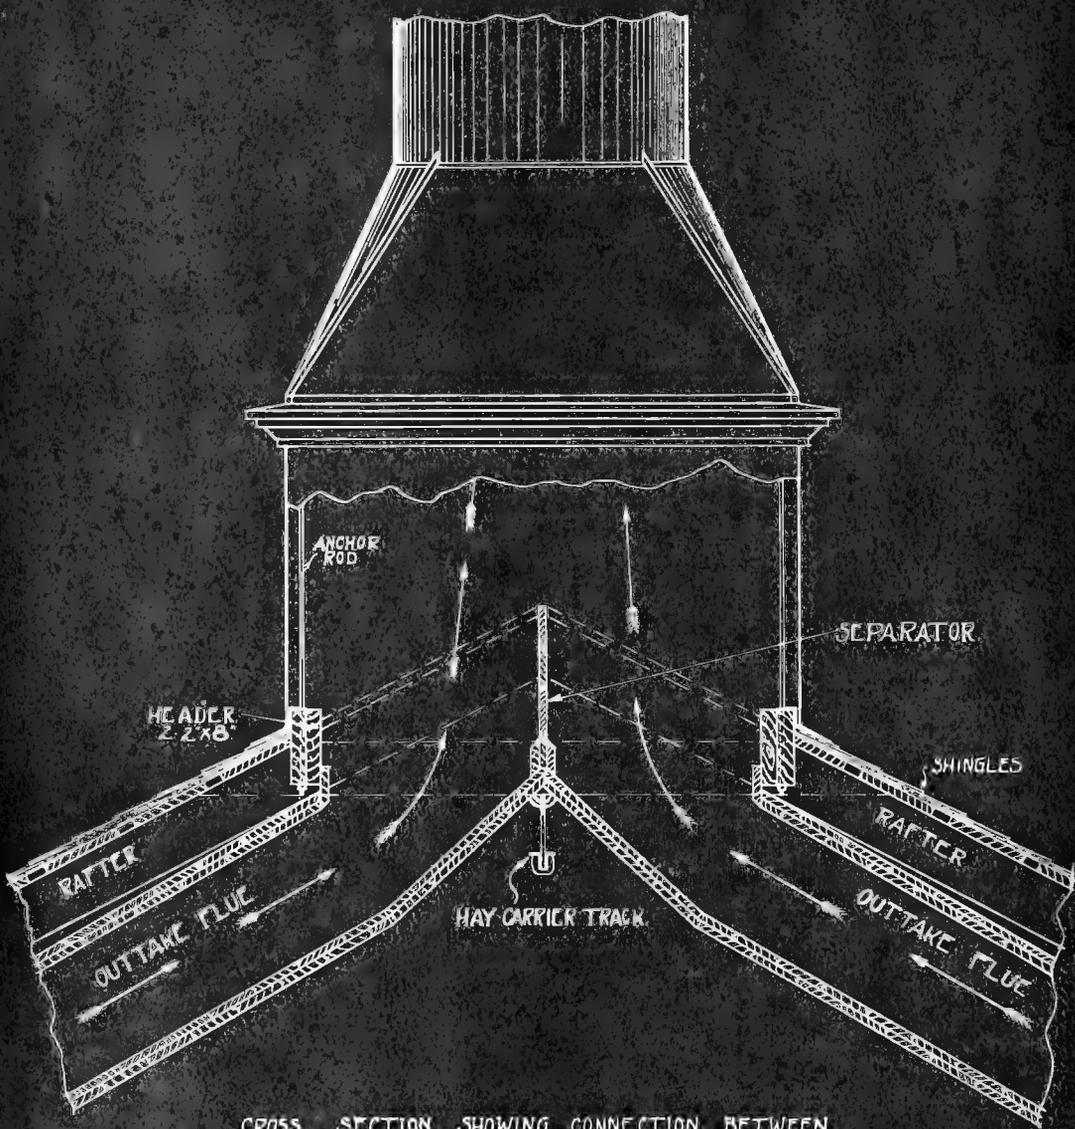

CROSS SECTION SHOWING CONNECTION BETWEEN
OUTTAKE FLUES AND BASE OF VENTILATOR.

NOTE- IF THE BASE IS NOT ENTIRELY COVERED BY THE
OUTTAKE FLUES THE SPACE REMAINING MUST BE
BOARDED UP TIGHT SO THAT NO AIR CAN ENTER
FROM THE HAY LOFT.

barn. That's the WRONG IDEA that is costing dairymen of America thousands of dollars in decreased milk production, losses from disease, in depreciation of barns, equipment, hay, feed and in spontaneous combustion fires.

A cold barn does not mean a well-ventilated barn either. Foul, moisture-saturated air gets just as cold as pure air.

THE VENTILATORS THEMSELVES ARE ONLY PART OF THE VENTILATING SYSTEMS.

Your barn is not ventilated unless it is supplied with the right amount of pure air per animal—unless the entire volume of air in the entire barn is renewed constantly.

—and it is not rightly ventilated unless the warmth is kept in the barn, while the foul air and excessive moisture, floating dust and germs are expelled—unless every part of the barn from basement to haymow is kept free from foul air, gases and damaging moisture.

Your barn is not rightly ventilated unless this complete ventilation is accomplished without strong drafts and air currents, which not only fail to give complete ventilation, but keep harmful dust afloat in the barn. All the air must be completely changed, not merely stirred up.

No Sir—just cupolas, or ventilators by themselves, will never give real ventilation. *There's got to be a system behind the ventilator.*

The health laws of every state demand a certain number of cubic feet of fresh air per person in schools, churches, theaters, etc.—and it takes expert engineers to provide it. It is no easy, simple task—it is no easier with barns. It takes the same expert engineering.

Yet while the ventilators are only part of a system—the EFFICIENCY of the WHOLE system depends on them.


Cupolas and ventilators without a properly designed system are of no ventilating worth. You can't just buy a ventilator and supply your need. That's a big point to remember.

Yet, with the properly designed system, you still must take great pains in selecting the right ventilator. If your ventilator doesn't release the proper volume of air, your system doesn't work. It's the old case of no chain being stronger than its weakest link.

Correct barn ventilation is only possible when you have both a correctly designed ventilating system, and a correctly designed ventilator. The lack of either one will prevent proper barn ventilation.

Now let's study this matter of ventilation carefully and get a thorough understanding of it.

Ventilation is the process of creating and regulating diffused air currents, removing foul air and introducing sufficient pure air into a building, so that a certain standard of purity healthful to man and beast is at all times maintained.

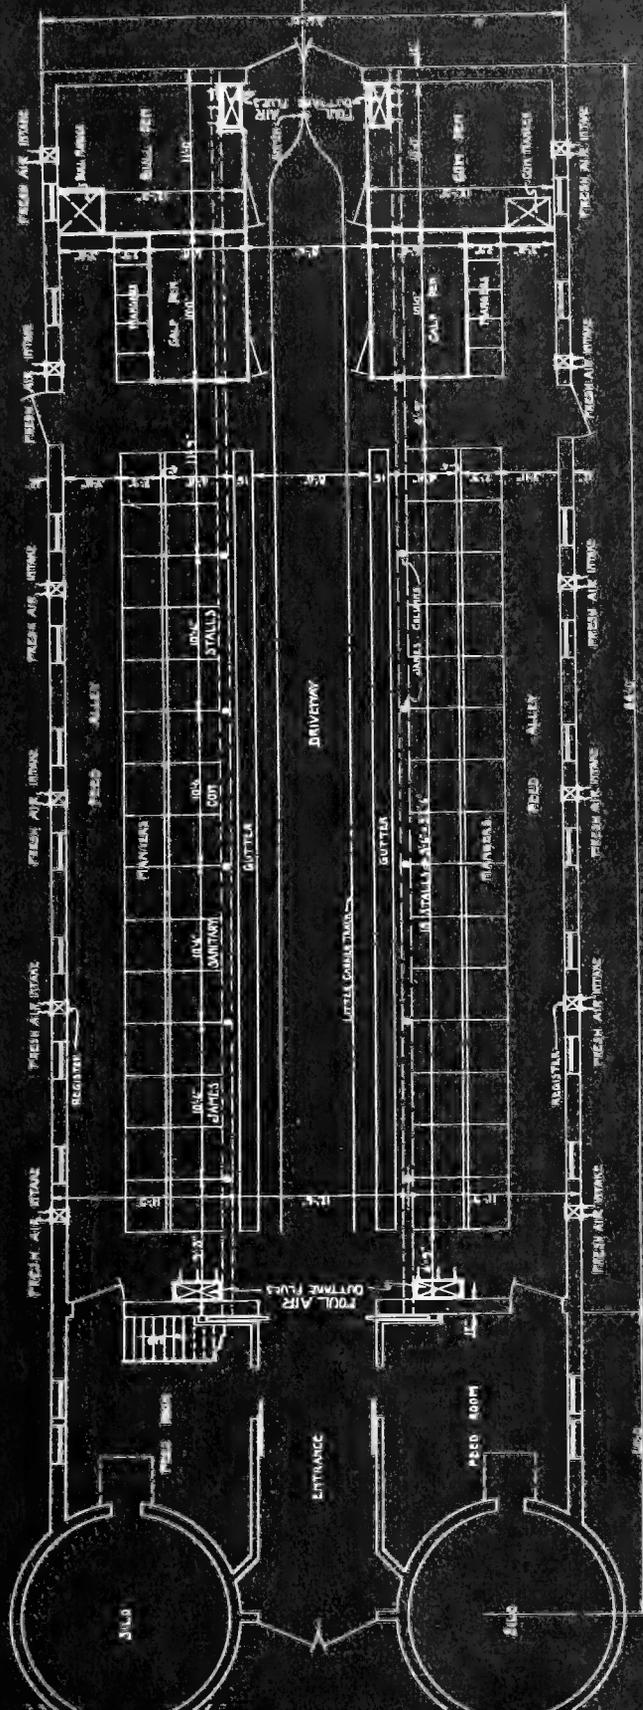


ARRANGEMENT OF INTAKES AND OUTTAKES
COWS FACE OUT

OPENING IN GUTTER TO HAVE AN AREA EQUIVALENT TO THE INSIDE AREA OF FLUE.




SECTION OF DOOR AND HARDWOOD STILE




SLIPING DOOR.



DOOR ADJUSTER




SECTION OF DOOR GUIDE.

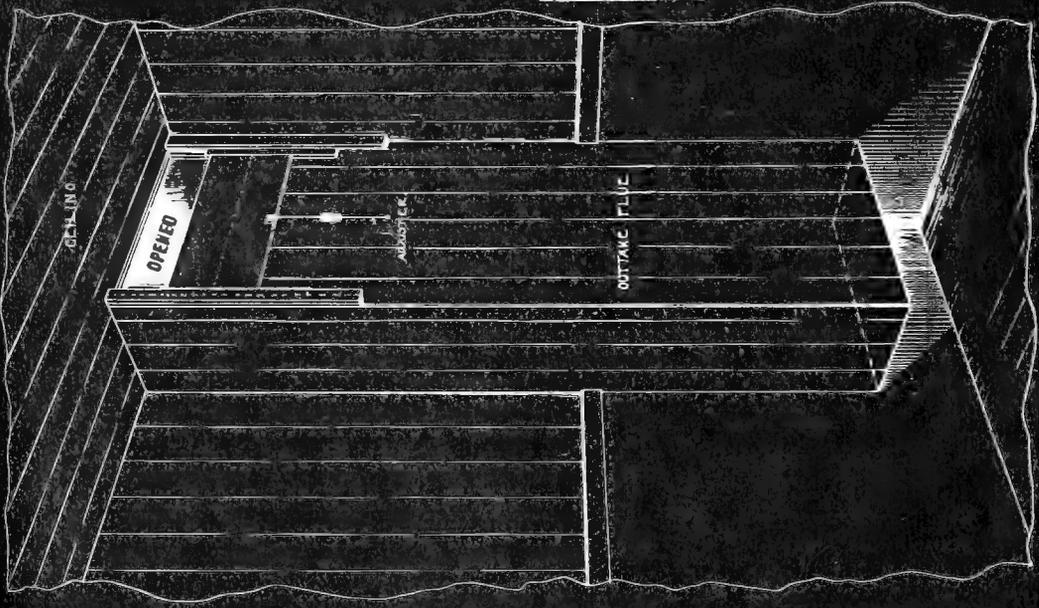

OUTTAKE FLUE WITH OPENING & DOOR AT CEILING.



SECTION OF ROOF

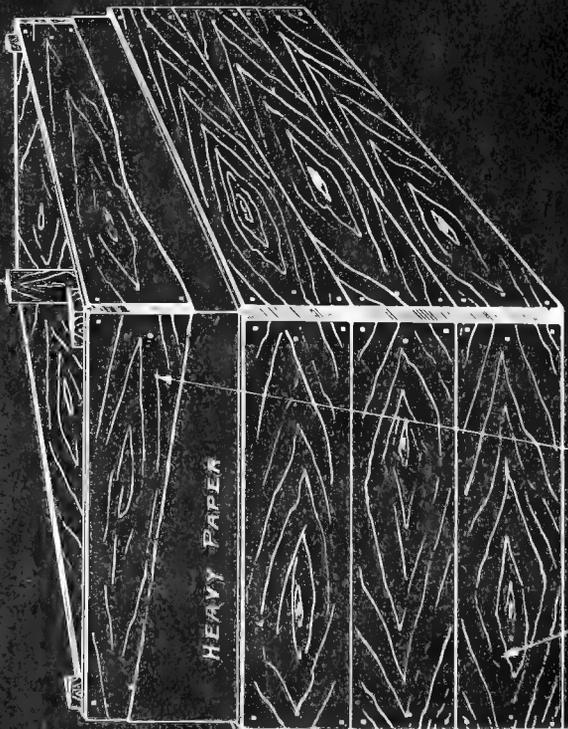

HEAVY PAPER

FLOORING

DETAIL SHOWING CONSTRUCTION OF OUTTAKE FLUE

A man can live forty days without food and seven days without water.

He can live but a few minutes without AIR.

A cow can live longer than a few minutes without PURE air; but the more impurities there are in the air she breathes, the greater will be the tax upon her health and upon her ability to produce milk—the greater will be the tax upon her vitality and upon life itself. In poorly ventilated barns, the air is breathed over and over again, and becomes poisonous; cows in such a stable become less able to resist disease, and cannot recover from diseases as easily.

Air, water and food are the three great essentials of life, and of the three AIR may fairly be considered the most important, because it is the FIRST great life-sustaining element for all animals.

How necessary pure air is to life and to the maintaining of vitality and energy is well illustrated by many interesting items cited by writers on the subject.

Near Naples, Italy, is the famous Dog Grotto, which is filled to a certain height with carbon dioxide, the same element that is thrown off by the lungs. So powerful is this carbon dioxide, or rather so powerful is the lack of oxygen because of its presence, that a dog brought into the grotto is rendered insensible within a few minutes. This experiment is often performed, on payment of a small fee, for the amusement of travelers.


The effects of breathed air have been frequently tested in schools where for a short time the ventilation had been cut off. The pupils at first complained of being cold, and it was found necessary to raise the temperature from 70° to 80° Fahr. before the occupants of the room were warm. This no doubt was due to the reduction in vitality owing to the impurity of the air and a lack of oxygen in the lungs. After the ventilation had been cut off for twenty or thirty minutes, the pupils began to complain of headache.

Everyone knows how quickly impure air in a room—a church or lecture hall, for instance—will cause a person to become sluggish and drowsy, and how it destroys energy.

In our histories at school, we used to read of the Black Hole of Calcutta, where, in 1756, 146 prisoners were confined in a cell 14 ft. 10 in. by 18 ft., having but two small windows—all but 23 dying during the night, for lack of oxygen.

How Much Air Does a Cow Need?

One writer vividly illustrates the vital importance of PURE air to the animal by pointing out what a task it would be to carry fresh air to a cow in a 3-gallon pail, as one might carry water. To supply a cow in this way,

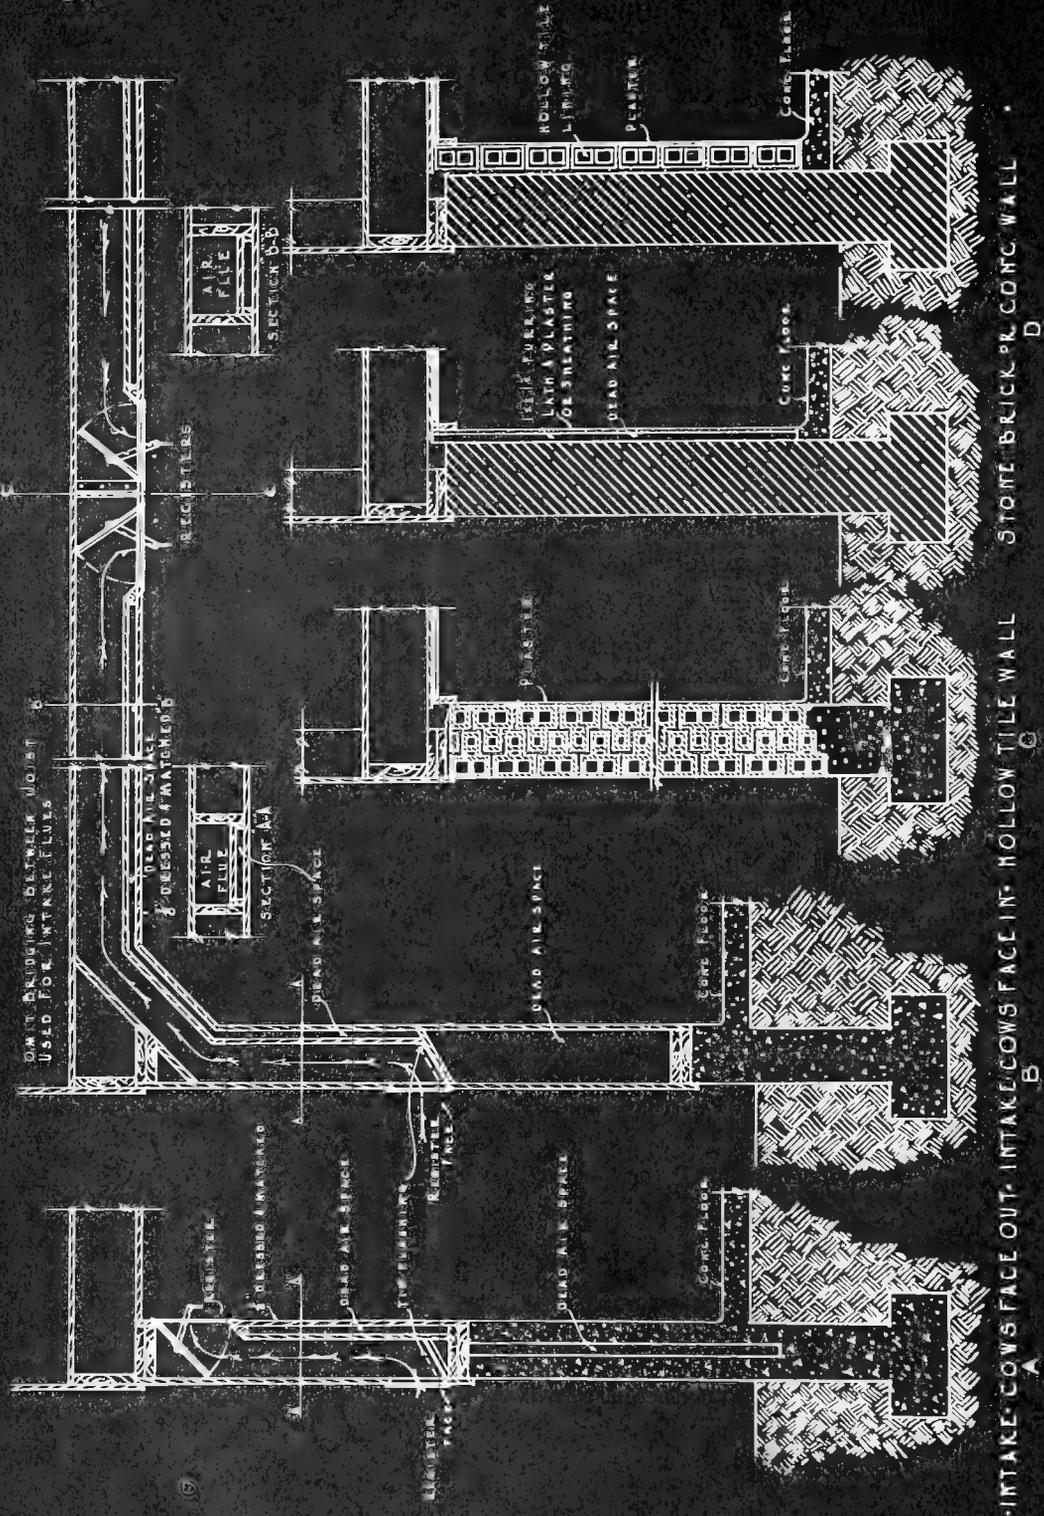

INTAKE COWS FACE OUT - INTAKE COWS FACING IN - HOLLOW TILE WALL - STONE BRICK CONCRETE WALL

would require 51½ full pails of fresh air each minute, or a total of 7,718 pails each twenty-four hours.

This amount of fresh air would contain 3 pails of carbon dioxide; after the cow breathed the air it would contain 307½ pails of carbon dioxide; and almost a pail of water would be given off by the cow through her lungs and pores.

A cow consumes TWICE the WEIGHT of pure air that she does of FOOD AND WATER COMBINED.

Can you realize what an amount that is?

Pile up a day's ration of hay and silage and grain; beside it put the pails of water a cow will usually drink in a day.

The WEIGHT of that food and water equals just about ONE-HALF the WEIGHT of the air the cow requires during the twenty-four hours. And that is figured on the basis of pure, fresh air at that.

To phrase it in another way:

The average cow requires for six months' rations about 2½ tons rough feed, 3½ tons silage, 1 ton concentrates and 13½ tons water, a total of 20½ tons, or 41,000 lbs.

For the same period, the cow requires 82,000 lbs. of air, or 41 tons.



The 20½ tons of feed each, above mentioned, for 20 cows would fill 40,000 cu. ft., or the loft of a barn 36 ft. x 60 ft. with 14-ft. side posts and gambrel roof.

The 41 tons of air each for 20 cows would fill the loft of such a barn 36 ft. wide with 14-ft. side posts and gambrel roof, 10 miles long.

The scientists tell us that air is not a simple substance, but consists of a mechanical mixture of the gases oxygen and nitrogen with about 1 per cent by volume of argon. Atmospheric air of ordinary purity almost always contains a little carbon dioxide together with more or less vapor of water, and a very active form of oxygen known as ozone. The average composition of air is given as follows:

Oxygen	20.588
Nitrogen	76.765
Carbon Dioxide.....	0.039
Water	1.686
Argon and other constituents.....	0.922
	<hr/>
	100.00

The air as thrown off by the lungs at 90 to 98 degrees Fahr. is nearly saturated with water, and contains from 3 to 5 per cent carbon dioxide; hence, it is from 1 to 3 per cent lighter than the air inhaled.

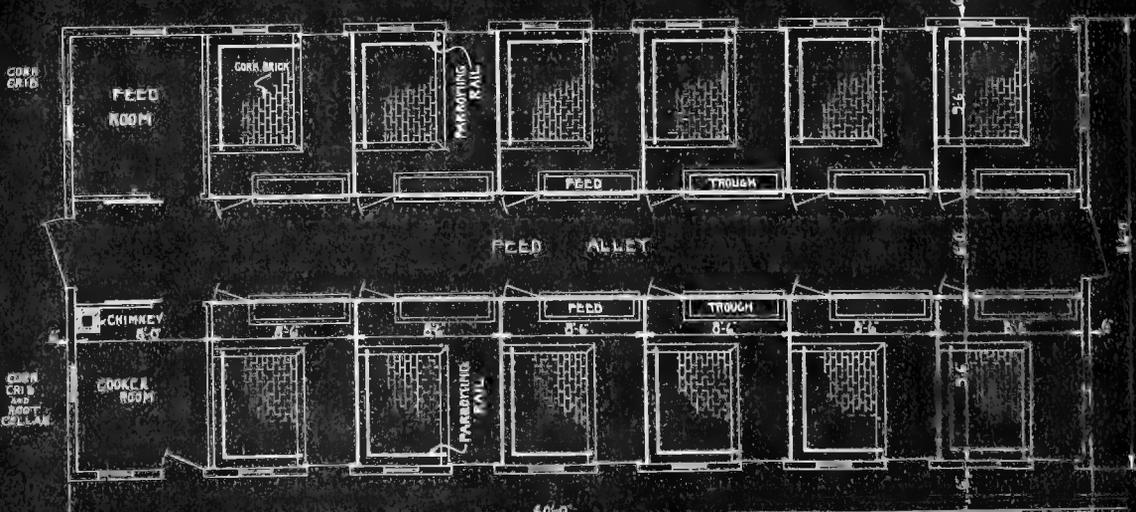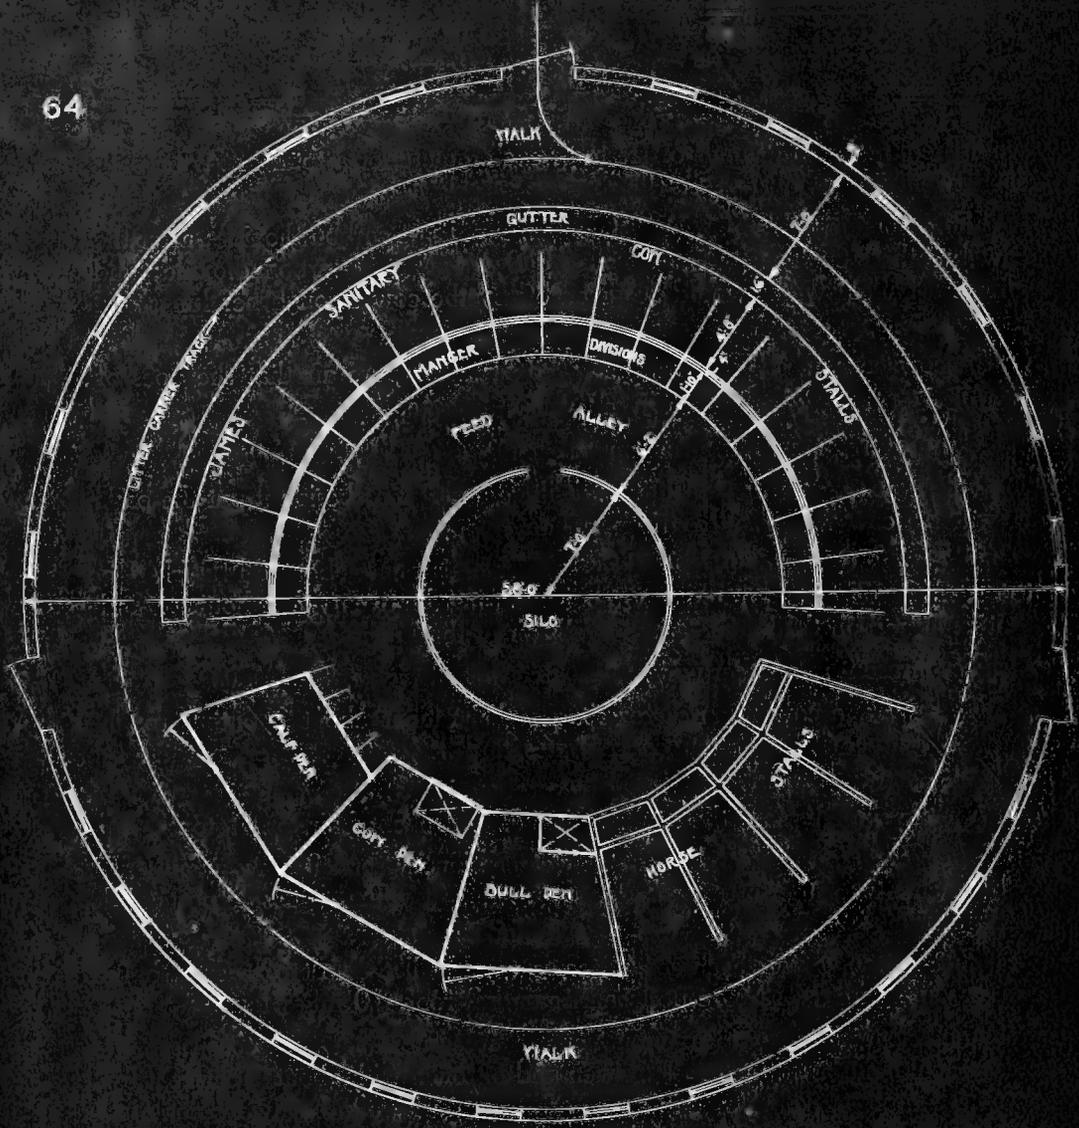

The following table shows the approximate effect of respiration on the composition of air:

	Entering Air	Respired Gases
Oxygen, per cent of volume	20.59	15.74
Nitrogen and other constituents	77.68	75.29
Carbon Dioxide	0.04	4.00
Water	1.69	4.97
	100.00	100.00

It is the oxygen that is the energy and life-producing element; without it there can be no animal life. Oxygen is not to be considered as having any properties as a food, but is rather the necessary element which makes it possible to assimilate and utilize the food.

While the air is in the lungs, the oxygen which is imparted to the tissues acts upon the carbon of the blood, forming chemical compounds which are thrown off in respiration; this process resulting in the production of heat and energy so necessary to life.

A similar process occurs with the burning of coal or wood in the stove.

The oxygen of the air unites with elements in the fuel to produce that energy we call heat, and the same waste products are formed—carbon dioxide, ammonia gas and water vapor.

This waste—the smoke and the ashes—must be removed from the stove, and oxygen supplied—or the fire will cease to burn.

In the same way, the respired or breathed air *must* be removed from the stable, and fresh air supplied, so that the cow may have *oxygen* on which to live and supply the energy necessary to produce milk.

If the stable were air-tight, and no fresh air introduced, the cow would die, just as the fire choked with ashes will soon go out, though it may be plentifully supplied with good coal or wood.

Fortunately no stable is air-tight; but in the colder states of the north, most stables are built as tight as possible, to insure warmth for the cows.

Conditions in this respect are rapidly improving; but even today very few stables, comparatively, provide sufficient ventilation—enough *oxygen*—to enable the cows to make the most milk possible from the feed and water they consume.

In all such cases, providing plenty of fresh, pure air will result in greater milk yields.

Actual experiments have proven that cows stabled in ordinary barns without adequate ventilation, will give more milk when the proper ventilation is provided; and when the operation of the ventilating system is stopped, their milk yields will immediately decrease to the former amount.

Not only is oxygen more necessary to life than food and water—not only does the lack of sufficient oxygen reduce the milk yield—but it affects the health and vitality of the animal, making her less able to resist disease.

Now, out-of-doors the cow gets all the pure air, all the *oxygen she needs*. But it is far different in the winter time, when she is confined to the barn.

In many barns, the cows must breathe the same air over and over, excepting for the small proportion which may leak in from outside through cracks and through the occasional opening of a door.

To get the most milk possible from his cows and to make more profits, the owner must in some way bring plenty of pure air to the cow's nostrils.

Since air is the most important element in maintaining life and energy—since a cow consumes twice the weight of air that she does of food and water combined—and since air costs absolutely nothing—the owner of cows can afford to study this matter carefully, and make certain that his animals are being fed *all the oxygen they need*.

The water vapor present in breathed air must also be removed from the barn.

The moisture thrown off by the average cow in twenty-four hours amounts to $11\frac{1}{2}$ pounds, or $1\frac{2}{5}$ gallons of water.

Thirty cows will load the air in the stable with $1\frac{1}{3}$ barrels of water daily.

If that amount of excess moisture is permitted to stay in the barn, the results are harmful not only to the cows but to the barn itself, rotting the sills and timbers and shortening the life of the building.

This excess moisture in the stable air causes that disagreeable “steaming” so noticeable in many barns on cold days.


This “steaming” is a sure sign that the moisture is not being carried off by the ventilating system, that the air in the stable is not being changed with sufficient frequency to keep it fresh and pure.

If the ventilating system used in the barn is a successful one, all this moisture will be promptly removed; but if there is too slow a change of air this moisture will remain in the barn, condensing on walls and ceiling, making the harness damp and frosty and the hay heavy and wet.


How to Ventilate the Barn

With the right system of ventilation, the stable may be kept comfortable at all times, yet the air will be pure and free from odors.

Some think that the opening of the haychutes provides proper ventilation. While this may effect a sufficient change of air in the stable, it does it at the expense of heat, making the barn cold; removing all of the warmest air which is at the ceiling.

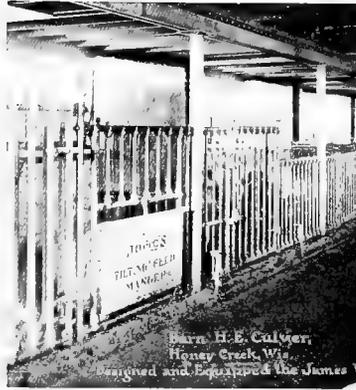

Barn, H.E. Culver,
Honey Creek, Wis.
Designed and Equipped the James Way.

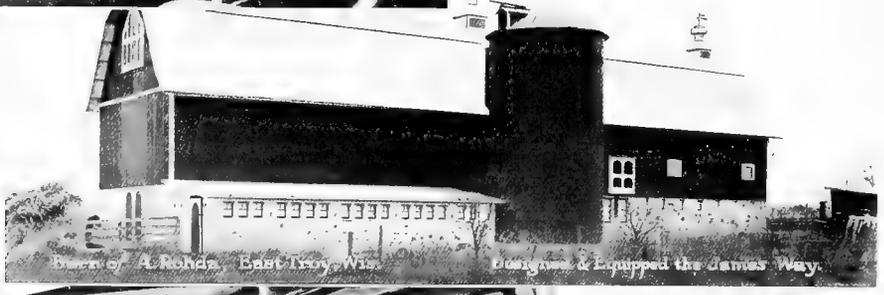

Barn of A. Rohde, East Troy, Wis. Designed & Equipped the James Way.



Barn of H.E.
Honey Creek, Wis.
Designed and Equipped the James Way.



Barn of H.E. Culver, Honey Creek, Wis.

Another objection is that the warmer air of the stable coming in contact with the cold air in the haymow condenses the moisture. The moisture and some of the foul elements of the air from the stable are deposited on the hay, and is fed again to the cows.

If any cow in the herd has tuberculosis this may be a very serious matter. The germs of tuberculosis and other diseases have no power of locomotion themselves, but are readily carried on particles of dust. With the right method of ventilation these particles of dust, carrying the disease germs, would be conveyed through the outtake flues out of the barn and into the open air and sunlight, where they quickly perish.

If the air with its load of germ-carrying dust is taken into the haymow much of the dust with the germs of tuberculosis and other diseases will be deposited in the hay, and being again fed to the cows may have disastrous results in the spreading of disease.

To provide the immense amount of fresh air required by the cows in the barn, careful provision should be made when planning and building the barn. It is, however, not difficult with most old barns to install a satisfactory system of ventilation.

The only practical way in which oxygen can be brought to the cow's nostrils and foul air removed is by correct ventilation, and this requires:

1. That there be a continuous change of air in the stable, so that at no time will there be too much air that has been once breathed. *Authorities set 3¼% of air once breathed as the limit.*
2. There must be no stagnant spots of foul air at any place in the stable—the pure air must be thoroughly diffused throughout the barn, supplying fresh air to each and every cow.
3. This complete change of air and its thorough diffusion throughout the barn must be accomplished without excessive loss of heat.
4. No harmful drafts should strike the cows.

James Improved Ventilating System

This problem, to a large degree, has been solved by the James Improved Ventilating System. It must be remembered, however, that the science of ventilation, especially as applied to the dairy barn, is by no means perfect. There are factors affecting ventilation that are not yet well understood, and it is not possible for anyone to guarantee 100 per cent efficiency in all cases.

In the James Improved System, the principles of ventilation proven necessary by scientific investigators in past years are made use of, together with certain improvements developed by Mr. James and his associates. The system may be briefly explained as follows:


Warm air and moist air rise.



Barn of State Prison
Waupun Wis
Designed and Equipped the James Way



Barn of E. K. Johnson
Chicago Ill
Designed and Equipped the James Way

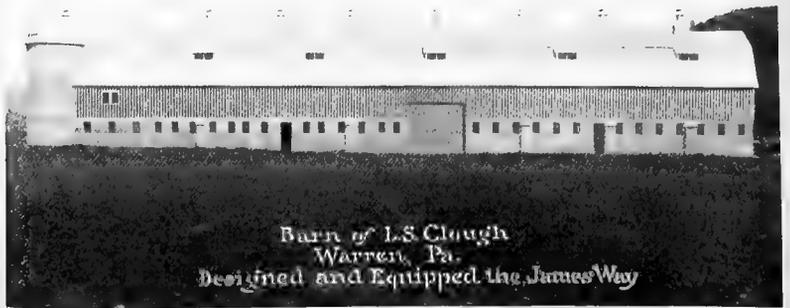

Barn of L.S. Clough
Warren Pa.
Designed and Equipped the James Way

The foul air is ordinarily removed from the barn at the floor through one or more outtake flues, the principal reason for so doing being to prevent undue loss of heat, as oftentimes happens when the foul air is removed at the ceiling.

The air at the inside opening of the outtake being warmer than the air out-of-doors, starts an upward current in the flue, just as the kindling of a fire in the stove starts a draft that gradually becomes strong.

This movement is also assisted to some extent by the wind blowing across the top of the outtake, just as a chimney has a stronger draft when the wind is blowing hard.

However, if dependence is placed on the difference in temperature between the air in the stable and that out-of-doors, the system will not always work satisfactorily in the warmer weather.

The James ventilator has been developed to increase the air movement, and make more certain the uniform operation of the ventilating system.

This is accomplished by taking full advantage of the power of the wind, creating a suction that exerts a powerful pull on the air in the outtake flue.

Scientific tests by a competent engineer, as well as tests in actual use in dairy barns, have proven that with this principle in ventilators, 30 to 65% better ventilation is secured as compared with the old wooden cupola and the ordinary ventilators on the market.

Although it is usually desirable to remove foul air from the floor level in order to conserve the heat, it is sometimes found that this method fails to remove enough of the moisture.

That moist air rises is evidenced by the fact that steam, which is air 100% saturated with moisture, always rises. The moisture in a barn will, therefore, tend to collect at the ceiling.

An opening in the outtake flue should be provided at the ceiling to remove this moisture, on days when it is excessive. This opening to be the same size as the opening at the floor, and provided with a slide that it may be opened or closed as conditions may require.


This opening at the ceiling may also be used to remove the warm air in warm weather.

The Intakes

Every foot of foul air removed from the stable will, of course, be at once replaced by an equal amount of fresh air. The fresh air enters at the ceiling through intakes in the walls of the stable, the inlets of which in the outside of the wall are located about halfway between floor and ceiling. The purpose of this is to "trap" the heat within the stable. The warm air being lighter than cold, cannot get out through the intake flues.




Barn of A. J. Souda - Boston, N. Dakota.
Designed and Equipped the James Way.

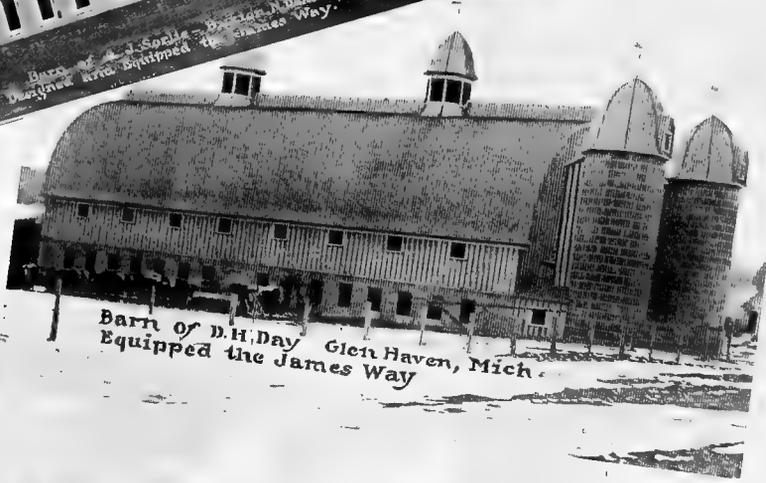

Barn of D. H. Day - Glen Haven, Mich.
Equipped the James Way



Barn of F. H. Thompson and Son -
Fulton, N.Y.
Designed and Equipped the James Way

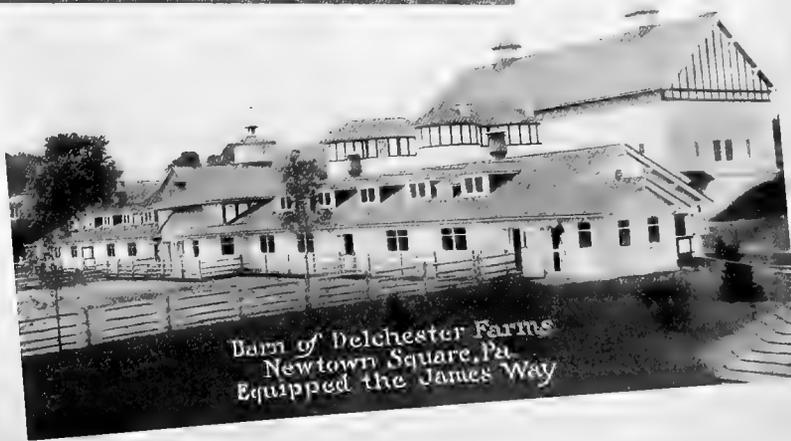

Barn of Delchester Farms -
Newtown Square, Pa.
Equipped the James Way

The air at the ceiling being warmest, the fresh air is gradually warmed as it descends.

Where the cows face out, air enters from the side wall near the ceiling; where the cows face in, the air is brought to the center of the barn and enters the stable through the ceiling.

Thus the fresh air always reaches the cows' noses before passing over the gutter, the intakes being so located that the foul air is drawn out from the rear of the cows. See page 54, 55, 58 and 59.

This principle is a James idea.

By the proper spacing of the intakes and the correct location of the outtakes fresh air is so thoroughly diffused before reaching the cows that no harmful drafts are created, as often occurs when opened windows are used for ventilation.

There are many details, however, that must be observed in order that the system be fully efficient.

Essentials for the success of the system are covered in the following paragraphs:

1. The barn walls and ceiling should be as nearly air-tight as possible, consistent with economy; they should also be good non-conductors of heat.

2. The air should be made to enter and leave only through the flues designed and arranged for that purpose; in order that the heat lost may assist in ventilating the barn, haychutes, stairways and other openings should be kept closed.

3. The flues through which the foul air is taken from the barn should be of a warm, air-tight construction, so protected as not to hinder the draft by allowing the outgoing air to cool too rapidly. The foul air flues should be at least twenty-five feet in height; the opening into the flue being about one foot from the floor, in order that the coldest air may be removed, and with an opening of like size at the ceiling for the removal of moist air, should moisture at any time become excessive. These outtake flues should be as straight as possible, with the proper capacity to insure a sufficiently rapid change of air. Outtake flues built on the outside of the barn are unsatisfactory.

4. The fresh air flues, to be most effective should be air-tight, having their inlets outside of the barn, about midway between floor and ceiling and their openings into the stable within eight inches of the ceiling when the stalls face out. Fresh air intakes should be not more than twelve or fourteen feet apart, and should have a joint capacity exceeding that of the foul air outtakes.

5. If the cows face the center of the barn, the fresh air should enter the stable through the ceiling at the center through pairs of registers—one for each side of the barn—the registers in each pair being separated. If the cows face




Barn of Walter H. Dupee
Santee Calif.
Designed and Equipped the James Way



Barn of Dept. of Charities and Correction
City of Cleveland
Designed and Equipped the James Way



Barn of Walter H. Dupee
Santee Calif.
Designed and Equipped the James Way

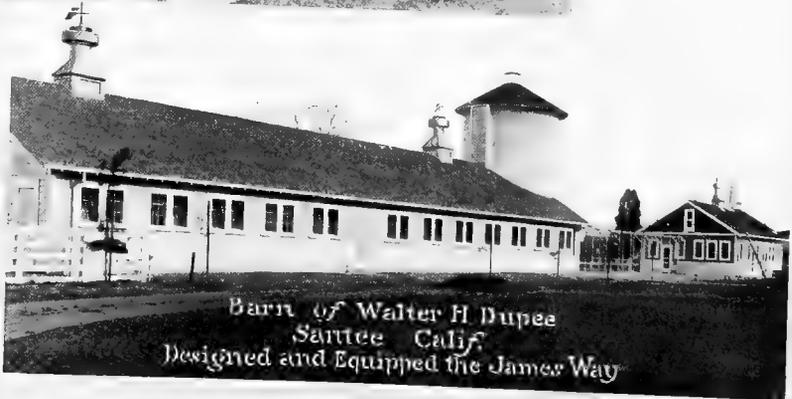

Barn of Walter H. Dupee
Santee Calif.
Designed and Equipped the James Way

out, the fresh air should enter through the walls at the ceiling. This brings the fresh air to the cows' noses before it has any chance of being contaminated by passing over the gutters.

6. The foul air outtakes should be so located as to insure a thorough diffusion of the fresh air throughout the stable, leaving no "dead" spots of foul air at the ends, sides or center of the barn.

7. The outside opening of the outtake flue must be properly capped. We have for many years been engaged in the designing of dairy barns which have called for systems of ventilation; and during these years we have been called on to examine hundreds of barns in which the ventilation was not working properly. Very frequently the trouble has been traced to an improperly constructed cupola.

The most frequent fault found is the tendency to make the cupola too small. If the cupola is too small, the system will not work satisfactorily, regardless of how carefully the balance of the system may be installed.

Another frequent difficulty is found in making the cap too low, smothering the draft.

And sometimes trouble is caused by going to the other extreme, making the cap too high, so that the wind blows down the outtake flues, forcing the air out through the intake flues.


One is apt not to understand just how large a ventilator should be unless the subject has been studied very carefully; and when a cupola is home-made, or purchased in a local shop, one is likely to underestimate the size required.

8. Ventilators of correct construction should be used in connection with the system, to secure the added benefit of a forced draft or suction to pull foul air out of the barn. These ventilators should be properly connected to the outtake flues. See page 56.


9. When the barn does not contain the number of animals for which it is designed, the intakes may be partially closed, so as to restrict ventilation to an amount proportioned to the number of cattle in the barn. This is sometimes necessary in a partially filled barn, to keep it from getting too cold. There must, however, be enough cows in the stable to generate sufficient heat to maintain the difference in temperature between the stable and out-of-doors to secure the most efficient ventilation.

Degree of Ventilation Necessary

Authorities differ as to the amount of air to be provided in a stable, but at the present time they seem well united in considering that when it does not contain over $3\frac{1}{4}$ per cent of air once breathed, fairly good ventilation would be provided.

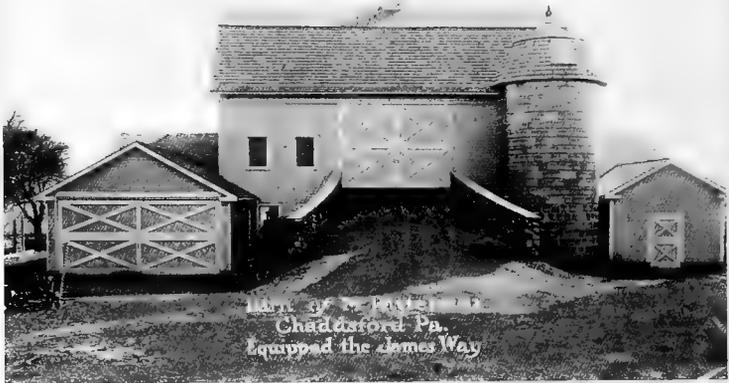

Barn of M. Ryfel
Chaddsford Pa.
Equipped the James Way

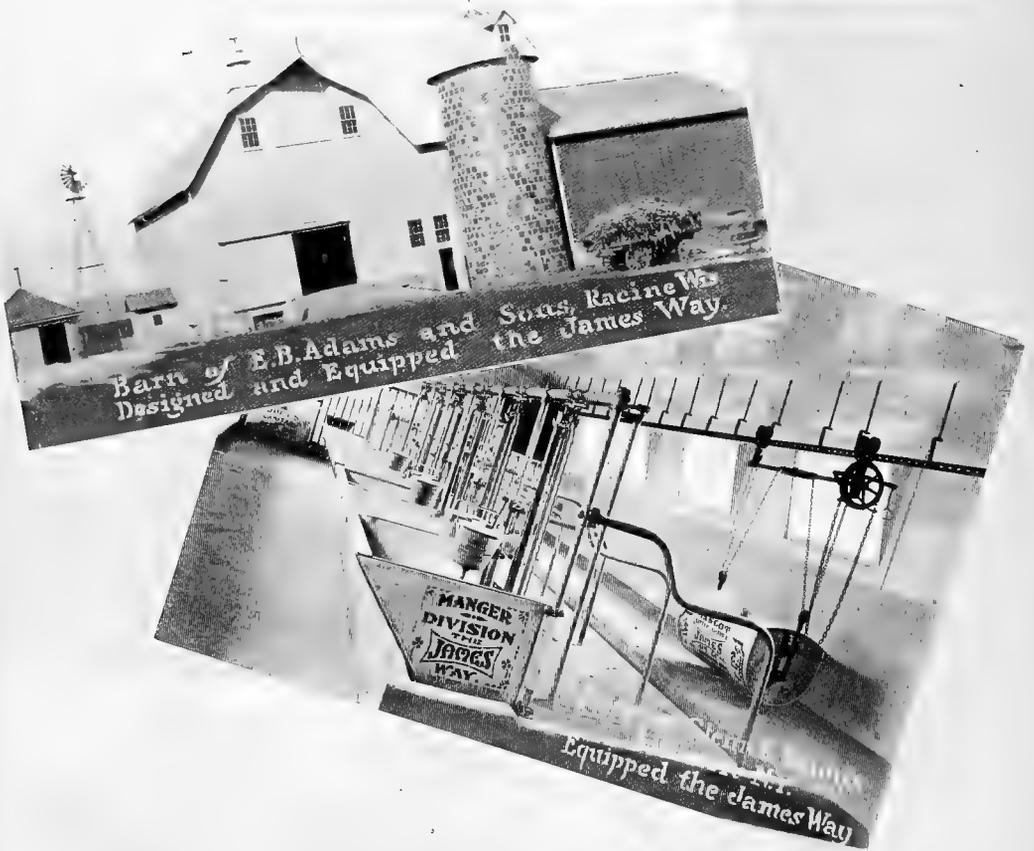

Barn of E.B. Adams and Sons, Racine Wis.
Designed and Equipped the James Way

Equipped the James Way



Barn of Carl Thompson
Arlington Wash.
Equipped the James Way

The need of a continuous and sufficient supply of fresh air cannot be over-estimated. To secure good ventilation we have arbitrarily assumed the following:

1. That the flow of air in a square outtake flue will have at least an average velocity in the flue of 250 feet per minute, without mechanical forcing or the aid of heat other than that derived from the animals in the space to be ventilated.

2. That the standard of purity of fresh country air contains no more than four parts carbon dioxide in 10,000, and that the standard of purity which is to be preserved in the space to be ventilated be not over 17 parts of carbon dioxide in 10,000.

3. It is also assumed that the average relative humidity of fresh country air is 65 per cent or less.

To secure this air movement, the number of cubic feet of air required per head per hour would be as follows:

TABLE 1.

	Cu. Ft. Per Hour Per Head	Assumed Weights Per Head
For Horses	4,924	1,200 pounds
For Cows	3,953	1,100 pounds
For Swine	1,510	160 pounds
For Sheep	929	100 pounds
For Hens	37	3 pounds

With different weights per head, the amounts of air would change in proportion.

How to Figure Sizes of Flues

For example, an outtake ventilating flue for thirty cows would require $30 \times 3953 = 118,590$ cu. ft. of air per hour.

We will assume an air movement of 250 feet per minute, which equals 15,000 feet per hour.

To ascertain the cross section area of the outtake flue required for the cows, it is only necessary to divide the number of cubic feet of air required for 30 cows, by 15,000, thus,

$$118,590 \text{ cu. ft.} \div 15,000 \text{ equals } 7.906 \text{ sq. ft.,}$$

requiring a flue 34 inches by 34 inches, or two flues 24 inches by 24 inches each.

For every outtake flue there should be a number of intake flues whose combined area exceeds that of the outtake flue by 10 per cent, even in view of the unavoidable leakage of air through the walls and around the windows and doors.

Thirty cows require an outtake flue of 1138.5 sq. in. area; then these cows should have an intake of 1138.5 sq. in. plus 10 per cent which would be



Barn of State Tuberculosis Sanitarium,
Terra Alta, W. Va.
Designed and Equipped the James Way.



Barn of J. J. Hendley,
Memphis, Texas
Designed and Equipped the James Way.



Barn of Sunkle Co. Hog Farm, Sunkle, Pa.
Equipped the James Way.



1252.4 sq. in. Assuming 20 intakes, each would have to be 1252.4 divided by 20 equals 62.7 sq. in. area or about 8 in. x 8 in. square.

The nominal area of a register or register face should be about 50 per cent greater than given by this computation; actual areas of commercial registers are given in Table 2.

TABLE 2.

Size of Register Face Inches	Effective Area Square Inches	Size of Register Face Inches	Effective Area Square Inches
6 x 8	32	12 x 12	96
6 x 10	40	12 x 14	112
6 x 12	48	14 x 14	130
6 x 14	56	6 round	19
8 x 8	42	7 round	25
8 x 10	53	8 round	33
8 x 12	64	9 round	41
8 x 14	75	10 round	51
10 x 10	66	11 round	62
10 x 12	80	12 round	74
10 x 14	93	14 round	100

Cubic Feet of Space per Animal

It should be distinctly stated that in matters of ventilation it is cubic feet of air rather than cubic feet of space which should be provided, and in the construction of stables, the amount of space need only be so much as is required to permit ample room and freedom for the animals.


Thirty cows should not be housed in a space much less than 42 x 33 feet, with ceiling 8 feet in the clear. In warm climates there is no objection, except the matter of cost, to high stables, but when it is cold, high ceilings permit warm air to rise so far above the animals as to leave the stable cold at the floor.

Essentials of a Ventilating Flue

A good ventilating flue should have all the characteristics of a good chimney. It should be constructed with air-tight walls, so that no air can enter except from the stable. Its interior surfaces must be smooth, and it should rise above the highest portions of the roof, so as to get the full force of the wind. It is better to have it nearly straight, when possible, and it should have an ample cross section area. In case of a slight angle in the flue, the cross section area should be increased, to offset the friction loss. Stronger currents through the ventilators will be secured by making one or more larger ones than where many small ones are provided, and it is usually best to have as few as possible, *yet not leave the impure air in distant parts of the stable.*



Barn of F. H. Metcalf, Halyoke, Mass.
Equipped the James Way

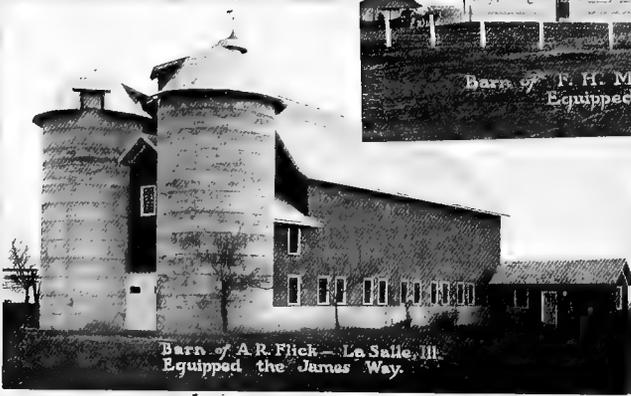

Barn of A. R. Flick - Le Salle, Ill.
Equipped the James Way



Barn of A. E. Chase - Framingham, Mass.
Equipped the James Way



Barn of James H. Moore, University
Equipped the James Way



Openings to the Ventilator

The outtake flue should be properly coupled to the ventilator and reach within one foot of the stable floor, so that air may come up the shaft from that level. This is very important, in order that the coldest air at the floor be removed during the winter, rather than the warm air at the ceiling. The bottom opening should be made as large as the least cross section of the outtake flue. An opening of the same size should be provided at the ceiling, however, that moist air may be removed when conditions so require.

This opening at the ceiling also provides for the escape of warm air when the stable is too warm, and when it is desired to force the ventilation at the expense of the heat developed by the animals. Both these openings should be provided with regulating valves, so that either or both may be partly or completely closed.

Entrance for Fresh Air

It will be noted from the different cuts shown, that in all cases the fresh air enters at the ceiling. This is for the purpose of mixing it with the warmest air of the stable, so as to raise its temperature before it falls to the floor. In this way the heat which is rising to and is resting under the ceiling is saved. The entering fresh air forces the foul air down and absorbs the excess moisture, whence it can be carried off by the outlet flue.

Provision is further made for the air to enter the intake outside midway between floor and ceiling, so as to prevent the warm air being drawn out at these places by suction, or to pass out directly as it would if they opened directly through the walls.

Construction of Flues

A good form of ventilating flue is made of two layers of number one matched stuff, $\frac{7}{8}$ -inch thick, with building paper or deadening felt between, to make it as nearly as possible a perfect non-conductor, thus preventing rapid cooling of the air in the flue. This form of construction also makes the flue airtight, which is essential, for every hole and crack lessens the ventilating power.

These openings should be placed on both sides of the stable, if possible, in order to take advantage of the wind pressure that increases the draft. It is better to have many small openings than a few large ones, because the cold air is better distributed, lessening drafts. All intake flues should be equipped with registers, so the air is at all times in control of the party in charge. Intake flues may be made of galvanized sheets or wood.

Intake flues should be insulated with a dead air space of one inch, as shown in illustrations A and B on page 62. Unless so insulated, the cold air flowing through the intake flue will condense the moisture of the warmer air of the barn, and the wall and ceiling along the intake flue will be covered with moisture or frost.

H. C. Prange of Sheboygan, Wis., writes: "Replying to your favor of Nov. 15th beg to say, yes, your plans were more than complete. The builder could follow them easily.

"I am frank to say that your Architectural Service Department I can recommend highly."

Nadeau Brothers, Nadeau, Mich., say: "The plans you furnished us for the dairy barn were entirely satisfactory, and worked out as well as we expected, and with the instructions given in your book in regard to putting up the bents made the erection very easy, and our carpenter had no trouble in following out the plans. The barn has proven very satisfactory and the ventilation appears to be perfect, as we have gone through one winter and there was no sign of moisture or frost in the building."

W. A. Schaefer, Minot N. Dak., writes Nov. 18, 1915, as follows:

"Received your letter today and seeing you want to know if the plans were complete must say they were in every detail and the carpenter had no trouble in following them. Furthermore he said they were the most complete plans he ever used. And I can say that I have one of the best barns and up-to-date that there is in this locality. Furthermore all the contractors that figured on the barn said they had seldom seen so complete plans as they were."

PHILADELPHIA, PA.

The James Manufacturing Co.,
Fort Atkinson, Wis.

January 21, 1914.

Gentlemen:—The new fire proof dairy barn which I recently erected on my dairy farm near Reading from plans made by you, has been very much admired.

I am very much pleased with your equipment and can most heartily recommend it as well as your services.

Yours truly,

D. W. DIFTRICH.

James A. Craig of the Janesville Machine Company, Janesville, Wisconsin, writes: "I can state frankly that the equipment that I purchased of your Company this year is entirely satisfactory and that the plans you furnished me were very complete, and we had no trouble at all in erecting the barn and equipment in accordance with the plans and specifications submitted by you."

Dr. C. W. Eddy of the Telling-Belle Vernon Dairy Company, Cleveland, Ohio:

"The increase in milk per cow was from an average of 19 pounds to an average of 25 pounds (six pounds increase) per day, at the end of about 3½ months after the installation of James equipment, all other conditions being equal. One hour a day in cleaning a string of 15 cows indicates the saving in time, and we have had no damaged udders since the installation of your equipment, which in itself is a tremendous saving in the production of certified milk."

James Manufacturing Company,
Fort Atkinson, Wis.

Auburndale, Wisconsin, November 14, 1917.

Dear Sir:

"How did you used to clean the barn?" A high heap of manure graced the barnyard. An icy plank led up to the summit. With a full wheelbarrow I made the hired man "Walk the plank," which he did with fear and trembling and sometimes copious "cuss" words. With concrete floors, gutters, mangers, and feed alleys made according to James specifications, and your overhead track for manure carrier and a forty-foot swinging crane, there is no "cussing" now around our dairy barn. While the hired man may not be a saint he is a happy citizen, willing to stay a while longer on the farm. We have steel stalls and stanchions for 32 head of cattle. Daily I am constrained to say, "I do not see how I ever stood it to get along year after year in the old, dirty, hard way." The fact is I kept paying for barn equipment over and over and did not have it either. I was paying for it in wasted hay and bedding, in useless efforts to keep the cows and milk clean on those old wooden floors, and most of all in the time I and my help wasted. Put this down as a cold incontrovertible fact that you pay for the equipment whether you install it or not. Silage truck is a time and back saver also.

As I have never kept time records on my chores, I can only give an estimate but I should say that time required for barn cleaning has been cut in half and while it took a stout man to wheel manure up that slippery plank, a woman or half-grown boy can handle my manure carrier in comfort and good time.

Yours truly,

HOWARD MURRAY JONES,
Smoky Hill Farm.

James Barn Plan Service

THE James Barn Planning Department is maintained for the benefit of our customers and others interested in the building of good barns.

Whether you intend to build, remodel, or just make alterations or additions—either now or later on—the experience, special knowledge, advice and counsel of this Department is at your service.

The James barn planning service has saved hundreds of dollars each for other dairymen; and if you will take advantage of the benefits which it offers you, you also will save money in the building of your barn.

This department is under the supervision of Mr. W. D. James, now known as the leading authority in the United States on the designing of dairy barns. Mr. James was born and raised on a dairy farm. A lifetime's practical experience has made him thoroughly familiar with every phase of the dairy business, from the cleaning of the barn to the handling of the profits. This, with his experience as a dairy barn designer, and as an inventor and manufacturer of dairy barn equipment, makes his advice of the greatest practical value.

Associated with him in work for our customers is a competent architect and engineer who has had unusual experience as consulting engineer in architectural work, giving special attention to ventilation, reinforced concrete, steel work and structural design.

Another architect with years of experience in the planning and building of dairy barns, a number of competent draftsmen and several men in charge of various divisions of the field force, complete the office staff of the Barn Plan Service Department.

In the field are some two score experts whose work takes them daily into dairy barns in every part of the United States, consulting on barn problems, drawing preliminary plans and reporting to the office on new ideas and unusual conditions.

For years, Mr. James and his many assistants have made a careful study of dairy barns—not only how they should be equipped—but how they should be constructed, lighted, ventilated, drained—how they should be designed and arranged to be most profitable to the owner.

They have personally visited tens of thousands of dairymen, have inspected their barns, and consulted with them regarding the features most essential to practical dairy stables. And they have talked with a large number of other practical dairymen on the same subject at dairy shows and fairs.

Every year they furnish plans from which are built hundreds of splendid dairy barns and are called upon to solve the barn problems of other thousands of farmers through correspondence and personal consultation in our office and on the farm.


JAMES barn plans represent all the biggest and best ideas in all the best barns built in every section of the country.



Barn of C.S. Potter
Ogden, Utah
Designed and Equipped the James Way



Barn of Hershey Chocolate Company
Hershey, Pa.
Equipped the James Way

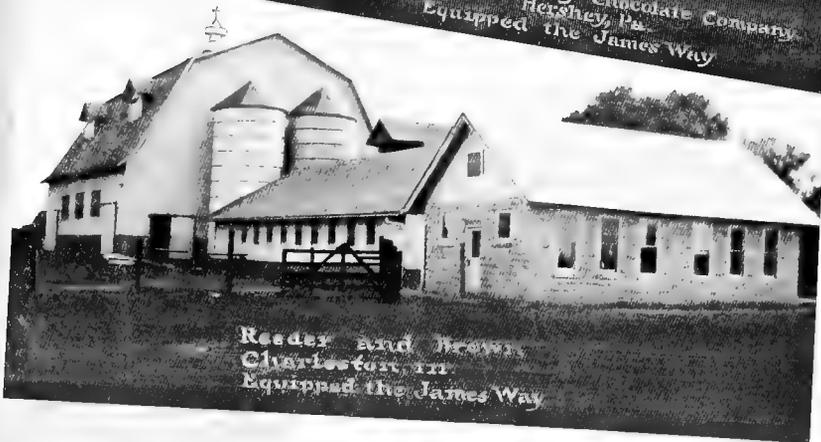

Reeder and Brown
Charleston, W.V.
Equipped the James Way



Barn of D. M. Bunting
Auburn, N.Y.
Designed & Equipped the James Way

We incorporate in the barns we design the most valuable suggestions obtained from the thousands of plans which come before us yearly for our inspection and criticism; so that JAMES service represents not only the original work of James experts, but the results of our contact with barn conditions everywhere.

The barns we recommend are plain, practical barns, believing the money is better spent to secure greater space, and better arrangement and convenience inside, rather than on a showy exterior. At the same time the barns designed by us are well proportioned and pleasing in appearance as may be seen from the photographs in this book.

You are offered the benefit of this special knowledge and long experience free of cost and without obligation on your part, excepting that we make a charge when complete plans and specifications are ordered.

We invite you to write us, submitting your ideas or telling us your problems; we may be able to make suggestions that will save you money, just as we have saved money for thousands of your brother dairymen.

2187 East 83d Street,

The James Manufacturing Company,
Fort Atkinson, Wis.

Cleveland, Ohio, September 27, 1915.

"I want to say that I am highly pleased with the plans and specifications as prepared by your architectural department. They are complete even to the smallest detail, and every suggestion or direction which I left with you has been noted. In fact when I remember the multitude of points we considered in our several conversations, I have to wonder how you did it so well.

If your equipment has the same high quality as the service of your architectural department, it will indeed be very satisfactory."

Yours truly,

W. H. WHITACRE.

"Gentlemen:—The Barn Plans I received from you were very complete indeed. The Builders had no difficulty in following them and must say they were very satisfactory in every particular. The ventilating flues I did not get complete last fall but put them in this summer and they work fine. If they do the work of keeping out the moisture in the cold weather I will be more than pleased for the extra expense of putting them in. I want to thank you for the suggestions you gave me as they enabled me to have a Barn that is a joy and pleasure."

P. O. LEARY, Waterville, Minn.

G. H. Love, B. S., Principal Holmes County Agricultural High School, Goodman, Miss., writes Nov. 18, 1915:

"The plans and specifications which you made for us were complete in every detail. I took the High School boys and built the barn with all its equipment except the cutting of the framing, and I am no architect. We have the most modern and best equipped Dairy Barn in the State for its size, and, as said, the Agricultural High School boys did all the work. Our new barn is the center of attraction for all visitors. In fact great numbers of people from this and adjoining counties have made special trips here to the Agricultural High School for the sole purpose of seeing the Dairy Barn, and all are more than pleased with the equipment."

D. M. Dunning, President of the Auburn Savings Bank, Auburn, N. Y., writes Nov. 19, 1915, as follows:

"Replying to yours of the 15th inst., would say that the barn erected by me this year under your plans, etc., gives entire satisfaction in every way.

"Among a number of large barns erected in this vicinity this year it stands out pre-eminent as a specimen of beauty and architecture, one of the other owners remarking recently 'it has certainly got me skun a mile.'

"Thanking you and grateful for your assistance, believe me,

Very truly yours,

D. M. DUNNING."



THE UNITED STATES OF AMERICA
PANAMA-PACIFIC INTERNATIONAL EXPOSITION
 SAN FRANCISCO, MCMXV.

CELEBRATING THE OPENING OF THE PANAMA CANAL
 THE INTERNATIONAL JURY OF AWARDS HAS CONFERRED UPON

GRAND PRIZE
 upon

JAMES MANUFACTURING COMPANY

Port Maitland, Washington,
 for Complete Sanitary Dairy Barn Equipment.

W. H. ...
John & ...
W. H. ...
Charles ...

Chickens
Submarine
W. H. ...

ARTS & SCIENCES

MANUFACTURES

TRANSPORTATION



EDUCATION

AGRICULTURE

MINING



PANAMA

Bigger Dairy Profits



THE purpose of the following pages is to show you the easiest way of keeping your cows and their stalls clean; how to save feed and to increase the milk yield; how to keep your cows comfortable while in the barn; how to save bedding; how to improve the health of your cows; lessen the need of hired help and make it easier to get and keep hired help when you need it; make it easier to keep the boys on the farm and to avoid some of the expensive accidents, like abortion caused by strain, and the ruining of a cow by a neighboring cow stepping on her udder; how to save work and save time in the daily chores about the barn.

In showing you how these things may be accomplished, we wish to emphasize the fact that in reality it will cost you nothing to achieve these ends, excepting the investment of a certain sum of money for a year or two.

The experiences of our customers prove conclusively that James equipment usually pays for itself the first year; but if it paid for itself within three years most men would regard it as an exceptionally good investment.

James Equipment Wins Grand Prize

The highest award that could possibly be given on complete dairy barn equipment came to the James Manufacturing Company from the Great Panama-Pacific International Exposition at San Francisco.

In the order of their importance the awards at this Exposition are: Grand Prize, Medal of Honor, Gold Medal, Silver Medal, Bronze Medal, and Honorable Mention.

James equipment received the Grand Prize—an award given to but one concern in each line—a recognition that means more than all the others combined, the most eagerly sought award that could be bestowed by the Superior Jury.

Experts of the dairy world had already placed their seal of approval upon James equipment. Its merit—its complete service and high quality—were conceded long before the Exposition opened its gates.

Now this approval is made official by judges eminently competent to perform so important a service for the dairy interests of the country.

In addition to the Grand Prize, Gold Medals (the highest awards covering the specific articles) were awarded the James sanitary cow stalls, stanchions, bull pens, feed carriers, milk can carriers, feed trucks, and litter carriers.

A reading of the following pages will show clearly the reasons for the granting of the Grand Prize and the Gold Medals to James equipment.



Barn of M. C. Prange
Sheboygan Wis.
Designed and Equipped the James Way



Barn of N. Smith - Watertown, N.Y.
Designed and Equipped the James Way



Barn of Borden Home Farm, Watkidd, N.Y. Equipped the James Way



Barn of H. W. Roseman
Franklin, Ohio
Equipped the James Way



Barn of H. P. Hood and Sons
Beverly, Mass.

Equipped the James Way

Saves Time and Work

James equipment saves work at every turn—when you are putting the cows in the barn and when you are turning them out; when feeding and watering; when milking; when caring for the calves and sick cows; when handling the herd bull; and it saves a very great amount of time when cleaning out the barn and grooming the cows.

Consider this one item of keeping the barn clean. By the use of the James alignment device, the cows are kept lined up at the rear, so that most of the manure falls in the gutter; the floor of the stall is kept clean and the cows do not get covered with filth. This saves a great deal in the labor of grooming the cows.

By the use of the James carrier, the manure can be easily and quickly removed from the barn, and (if a spreader is used) the manure can be taken from the gutter to the field with but the one handling—the shoveling from the gutter into the carrier tub.

The feed truck saves many miles of travel from feed bin to cow; the drinking cups save hours of cold and unprofitable labor; the bull staff saves time in the handling of the sire. And so it is with all the other labor and time-saving James features.

Saving Feed

During the past few years, the cost of feed has advanced greatly, and in spite of all that may be done by learning how to use cheaper feeds, it is of great importance that the cow get the benefit of every ounce that is given her.

That's where James equipment comes in again as a money-saver. The high level curb made possible by the James Double Chain Hanger on the stanchion, together with the James Complete Manger, prevents the cows from wasting feed.

Not only that—it makes it possible for you to feed each cow just the amount of feed and just the combination of feeds, that you think she ought to have to produce the best results. Each cow has her own feeding compartment, and a fast-eating cow can't rob a slow-eating neighbor. This prevents one cow getting too much and another too little, with a consequent waste of feed and injury to the cows.

In a letter, Charles Helms of Rose Lawn, Wis., mentions another way in which James equipment saves feed, and others have spoken to us of this same point. He says: "James equipment gives the cows comfort, so they require less feed."



IMP BEAUTY 7/1

DUSTY

ENJOY BIRTH

MILKING

FRED

PAUL

JAMES W. STEEL & SONS
MILKING MACHINES
CHICAGO, ILL., U.S.A.
SOLE IMPORTERS FOR THE
UNITED STATES
ESTABLISHED 1872

COW COMFORT

Comfort Increases Milk Yield

This matter of cow comfort is extremely important, for the way in which a cow is fastened in the stall has much to do with her milk producing ability. The cow is so comfortable in the James Stall, that her movements are not cramped in the least; she can lie down naturally and turn her head to card herself, reaching all the way back to her flank on either side. She is almost as free as though in the open yard, yet she is tied securely.

MILK INCREASED ONE-THIRD

G. F. Sanborn, Eagle River, Wisconsin, says: "I believe I am safe in saying that our milk yield has been increased at least one third due entirely to the comforts, conveniences, and cleanliness that has resulted in the use of the James fixtures. I would not be without these fixtures for any money and I think you should be congratulated on the good work you are doing in educating the farmer to the use of the James equipment. It is a real service to the farmer and dairyman which cannot be commended too highly."

GAINED 7.4 LBS. PER COW

A. L. Canniff & Sons, Juneau, Wisconsin: "Before we remodeled our building our cattle averaged 32 pounds of milk daily; after we remodeled the buildings they averaged 39.4 pounds of milk daily. *all conditions being equal with the exception of the James Steel Equipment we installed.* We attribute this gain of 7.4 pounds to the solid sanitary comfort which our cattle received from the James steel equipment."

25% MORE MILK

W. H. Mathei, Agricultural advisor for Florence Farm, Florence, Wisconsin: "Our cows have been doing wonderfully since they have been placed in the new barn. Your installations have without any doubt a great influence on the cows and their milk flow, which increased rapidly and steadily. The milk yield increased about 25 per cent and is still increasing."

20% TO 30% INCREASE

R. B. Melvin & Son, Glenbeulah, Wisconsin: "We are greatly pleased with results obtained since installation of James equipment. We have figured that our cows have produced 20 to 30 per cent more milk daily due to the James stalls and watering system. Our calf pens are equipped with James drinking cups. These alone are nearly worth the cost of the whole equipment for our calves have made the best growth of any we have raised in many years."

SEVERAL POUNDS DIFFERENCE

H. R. Lobdell, Mukwonago, Wisconsin: "Just a few days ago we were forced to take out of our barn part of our milking cows and put them in an adjoining barn with the old wooden stanchions for a few days. They were fed just the same feed and given just the same care but fell off several pounds of milk, per cow, by the end of ten days. They were brought back and at the end of twenty days, had gained back to their normal amount. I am quite sure that the loss was caused principally by the loss of the comfort of the better equipment and the better barn. The difference was very noticeable in more ways than one."

ONE-FIFTH MORE MILK

John Posttler, Birnamwood, Wisconsin: "We like the James equipment. In every way we can do our feeding and letting the cows out and in, in less than one-fourth the time than in our old barn without the James equipment. We only need one-half the bedding that we formerly did and the cows are clean. And we have an increase of about one-fifth more milk than before we had the James equipment, from the same cows."

25% MORE MILK

H. S. Pieper, Campbellsport, Wisconsin: "I am well pleased with the James equipment. In my experience, I believe I received at least 25 per cent more milk than by stabling cows in the old way. To my judgment the James Way gives the proper comfort."

Improves Health of Cows

The cleanliness afforded the cows by the use of James equipment, and the sanitary conditions in the barn made possible, helps maintain better health in the herd—and better health, of course, means more milk, with less money spent doctoring sick cattle.

You will note from the pictures how little the stalls interfere with light, that there is very little surface on which dust and disease germs can accumulate, and the air has free circulation throughout the barn.

Saves Bedding

In a stall without a manger, a cow oftentimes tries to get feed which is out of her reach. In straining for it, her hind feet may slip and push the bedding back into the gutter.

Then, too, James equipment, by keeping the manure in the gutter where it belongs, and not on the standing platform or the cow's flanks, lessens the amount of bedding required.

A. G. Abbott, of Wadsworth, Ohio, says that James equipment saves him money "because less straw is required for bedding."

With the cows in James Stalls, the bedding does not have to be changed as often, and this becomes an item worth consideration in the course of a year.

Higher Prices for Milk

Many dairymen who are selling milk direct to the housewives have discovered another very important feature of James equipment—its use as a means of getting more customers and a bigger price per quart.

People in the towns and cities generally know that milk is one of the best of foods. It is true they do not realize that at the usual prices, it is the cheapest of foods, but this is a fact which can quite readily be demonstrated to them.

The consumption of milk could readily be increased—perhaps doubled—if people fully appreciated its real food value and its cheapness.

But even without any education on that point, people in towns and cities would gladly use more milk and willingly pay a higher price if they felt sure of the purity and cleanliness of the milk furnished them; and dairymen can increase their business and profits by advertising CLEAN milk.

Read this experience of a practical dairyman as an illustration of what can be accomplished along this line:

Mr. Franklin C. Bron, of Tiverton Four Corners, R. I., wrote us:

"In my opinion, James equipment will last a lifetime, and it saves me money on a big basis. It has increased my business 100 per cent, as I have been recommended by the Board of Health and doctors of Fall River to receive fifteen cents per quart for my milk. The James equipment secured me the highest score by the Fall River Board of Health, which was 97 points for sanitary conditions, the next party to me scoring 73. That amounts to something, as Fall River is a very strict city on milk. I am doing a very good business, and I claim it all through the James equipment."

Lessens Need of Hired Help

James equipment makes you less dependent on outside help. Mr. S. P. Stevens of Bartlett, Ill., said something on this point that will interest you:

"By actual test, two men can better and more quickly care for ninety cows in our new barn, outfitted complete by you, than the same two men could care for forty-four head on the cement-floor barn with ordinary equipment we previously used."

Notice that Mr. Stevens says that with James equipment his men can do twice as much work. You can figure for yourself just what that saving amounts to each year in actual money.

James equipment lessens your need of hired hands in two ways: they cut down the amount of work to be done, and they make farm life easier and hence more attractive so that your own boys will feel more disposed to remain on the farm.

Keep the Boys on the Farm

The boys have been leaving the farm. During the past ten years the population has been rapidly moving from the country districts to the cities and towns; in many sections it has become very difficult to get hired men.

Though wages on the farm have steadily increased and the work made more attractive, the apparently greater opportunity and the allurements of the city continue to draw from the rural population, making it harder every year to obtain the help needed to work the farms.

James equipment lessens the daily work in the barn, cuts down the time required to do the chores, does away with the most disagreeable features of the task and helps make farm life easier and more pleasant.

There is plenty of hard labor and enough disagreeable features in farm life at the best; if you do not take advantage of the modern conveniences and labor-saving devices, it is to be expected that the boys will become dissatisfied and seek their life work in the towns and cities.

Figure the Savings in Your Own Barn

WE have tried to show you in a general way how James equipment will save and make money for any dairyman, whether he has three cows or three hundred, although we have said very little on some points because they are very fully covered in pages farther on in this book, but we believe we have said enough to prove our case.

Now take your pencil and figure out the saving in your own barn for yourself item by item.

Take the matter of labor for instance. Thousands of dairymen tell us that James equipment cuts squarely in two the work of caring for the cows in the barn; that the saving in time with a herd of 30 cows, for example, is not less than 30 minutes in cleaning out the barn, not less than 30 minutes in the watering of the cows and a saving of at least 30 minutes in other chores each day or a total saving with a herd of 30 cows of at least one and one-half hours per day.

Be conservative and figure your labor at \$2.00 per day or say 20c an hour. An hour and a half saved per day would be the equivalent of 30c, which in the 200 days or so during the cold months when the cows are kept in the barn, would amount to about \$60.00, or about \$2.00 per cow.

Even on this basis and disregarding all the other savings and profits brought about by James equipment, a James outfit would pay you a big profit every year.

Then estimate how much feed your cows waste every day by nosing it back into their stalls, how much feed is wasted by the fast-eating cow taking feed she does not need from a cow that eats more slowly. Assume that James equipment saves only a fourth instead of all this waste in feed.

Add that to the money saved on labor.

Now turn back to page 91 and re-read the letters from Mr. Sanborn and others who tell of the greatly increased milk flow resulting from the use of James equipment.

Some of them tell of 20 per cent milk increase, others of an increase of one-third, another of an increase of over 7 pounds per cow, and so on.

But suppose the increase in milk yield amounts only to 2 pounds a day—one pint each milking—it would mean \$6.00 more income per cow each year during the six or seven months they are in the barn.

That amount of increase in milk yield, of course, would hardly be noticeable but we want you to figure this on a conservative basis, for we know that no matter how conservatively it is figured the result will show a big profit from the investment in James equipment.



Dairy Cattle Building
Panama-Pacific Exposition
Equipped The James Way.

Now add the value of this increase in milk yield to the saving of labor and the saving of feed—a total of \$10.00 or more per cow.

Then estimate if you can what it is worth to you in dollars and cents to insure better health for your cows by reason of sanitary conditions in the barn, avoiding disease by being able to keep your cows clean, dry and comfortable; and how much it is worth to prevent accidents that might cause abortion and the ruin of valuable cows by having their udders tramped on by neighbors or by cows loose in the barn.

If that is worth anything to you, add your estimated savings from this source to the saving of labor, the saving of feed and the increased milk yield.

Now total it up—leave out of consideration all profit received through securing more customers and better prices if you operate a milk route; don't take into account the satisfaction of maintaining a sanitary, model dairy barn; forget about the better prices you get when you come to sell cows because of their showing off to better advantage in James stalls; omit from your figuring the benefit received by making it easier to get and keep good hired help (for hired help prefer every time to work in a barn equipped the James Way); consider only the actual money saved and made by reason of labor saving, feed saving, increased milk yield and better health of your stock.


If you've figured it carefully, you will know our customers are well within the truth when they say that James Equipment pays for itself the first year or two.

Now, don't you see that whether you buy James Equipment or not, you are paying for it anyhow—paying for it in unnecessary cost of caring for the cows in the barn, in wasted feed, extra help, loss of time, ruined udders, and by other losses and wastes that would be prevented by James Equipment?

So long as you are paying out this money anyhow, why not have James Equipment to show for it?

Why not take this money that is being expended without getting anything permanent in return for it, and change it into an investment that will pay back a big profit every year?

Can you afford not to modernize your barn the James Way?

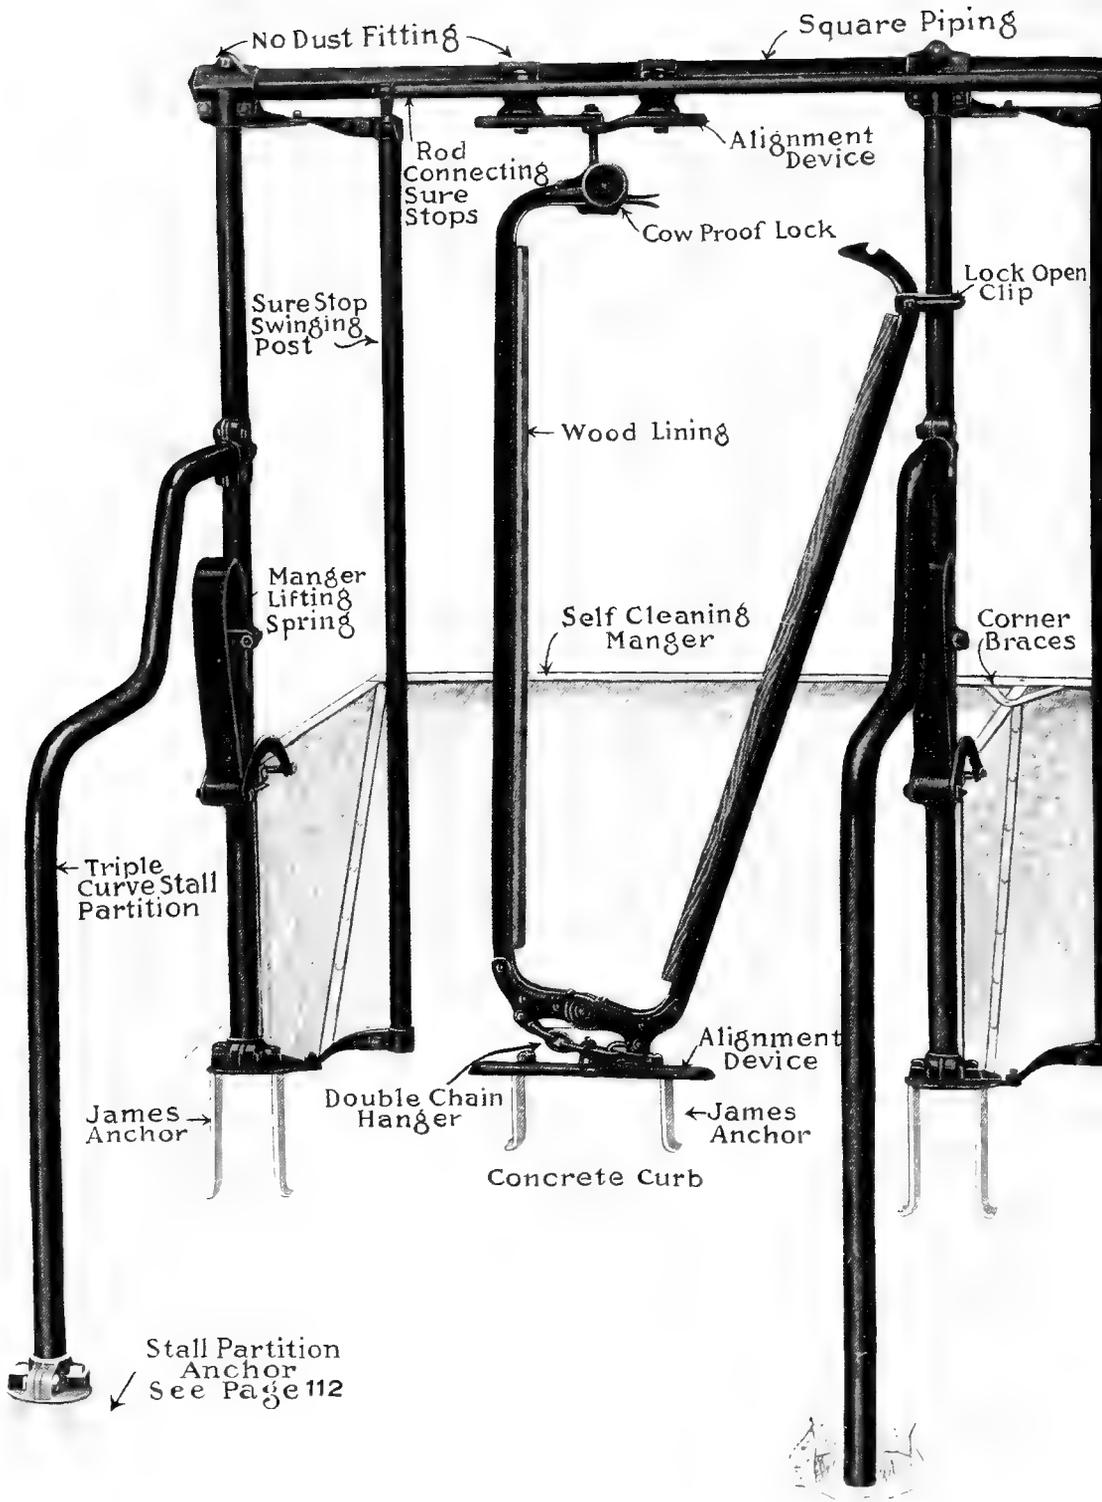

No Dust Fitting

Square Piping

Rod Connecting
Sure Stops

Alignment
Device

Cow Proof Lock

Sure Stop
Swinging
Post

Lock Open
Clip

Wood Lining

Self Cleaning
Manger

Corner
Braces

Manger
Lifting
Spring

Triple
Curve Stall
Partition

Alignment
Device

James
Anchor

Double Chain
Hanger

James
Anchor

Concrete Curb

Stall Partition
Anchor
See Page 112

Special Features of James Stalls



MOST folks have been used to thinking of a cow stanchion or a cow stall as merely a convenient means of tying the cow. Of course, that is the first purpose—and a stanchion or a stall that permits the cow to get loose in the barn loses most of its value.

James Stalls and Stanchions do tie the cows, all right—tie them so they can't get loose until they are turned loose—but they are far more than mere cow ties.

James Stalls and Stanchions insure profit-making comfort for the cow; increase the yield of milk; keep the stalls and the cows clean; save labor, time and feed; aid in preventing tuberculosis and other diseases; make it easier to disinfect the barn when that task is necessary; prevent accidents that might cause abortion or ruined udders; improve the health of the cows; save bedding; show off the cows better to prospective buyers; and make it easier to get and keep good hired help.

The various savings effected by James Stalls and Stanchions total large enough in a year or two to more than pay the initial cost; and these savings are made possible by the special James features, without which the stall would remain merely a cow tie.

You should, therefore, study carefully the following pages that you may understand clearly what each of these special features will do for you, and how it operates. It will be well worth your while for it will help you to choose wisely the stall that is best suited to your purposes and that will pay you the biggest profit on your investment.

None of these special features are in any sense "fads," but are practical devices that have been developed from actual experience on the dairy farm, to meet the needs of certain classes of dairy farmers.

It may be that your proposition is one that does not call for the installation of all the special features, but that you may select those special features that will help you most to increase your earnings, we have described them as fully as possible, and show illustrations of them in actual use.

James Sure Stop Swinging Post

(PATENTED)

When the James Stall was invented, it consisted of a swinging stanchion, a stall frame and the stall partition.

Of course, the object of the swinging stanchion was to permit the cow to move her head freely, to rest her head in a natural position when lying down, and to card herself on either side without interference; and to do this required as much room at the head of the stall as at the rear.

$\frac{7}{16}$ " x 2" Carriage Bolt →

↑
 $\frac{5}{16}$ " x 1" C. B.

↑
 $\frac{7}{16}$ " x 1 $\frac{1}{2}$ " C. B.



↑
Exact Diameter
 $\frac{7}{8}$ " O. D. and thick-
ness of wall about
 $\frac{1}{7}$ ". Sure Stop
Throw Pipe.

Showing details of upper and lower fittings on Stall Posts, and Sure Stop Swinging Post Fittings.

Exact Diameter
 $1\frac{5}{16}$ " O. D. and thickness
of wall about $\frac{1}{13}$ ". Sure
Stop Upright.

←
 $\frac{7}{16}$ " x 1 $\frac{3}{4}$ "
Carriage Bolt.

Size of
bolt used
 $\frac{7}{16}$ " x 1 $\frac{1}{2}$ "

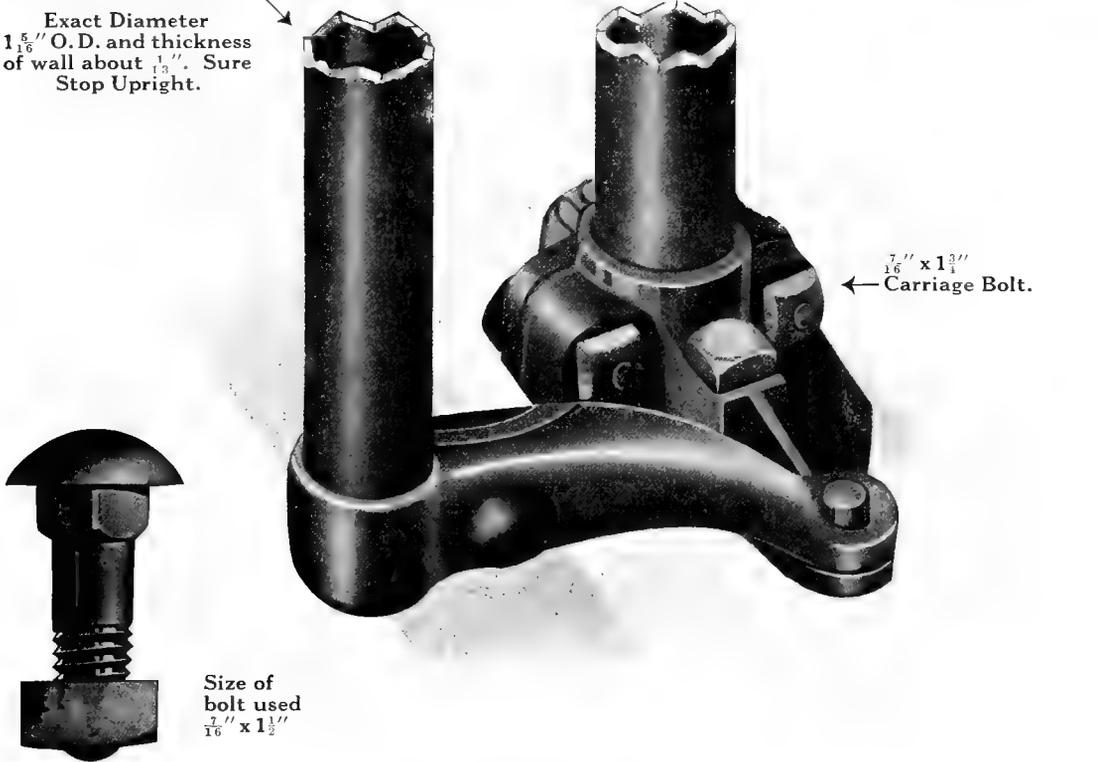

It soon became evident that in giving the cow this freedom and comfort, another difficulty had been encountered.

It is cow nature, when entering the stall, to put her head in the wrong place if she can. And it seems to be human nature for many hired men to sometimes lose patience and abuse the cow. And the owner pays for it with less milk in the pail.

The problem was simply this: A rigid stop was needed between the stationary bar of the stanchion and the stall post, when the stanchion was open; but this stop must not be there when the stanchion was closed.

So the James Sure Stop Swinging Post was devised, and most efficiently has it accomplished the purpose.

The James Sure Stop Swinging Post and Lock Open Device steer the cow's head right into the open stanchion—saving time and trouble.

But when the cow is locked in the stanchion, the sure stop post can be swung back out of the cow's way—giving her plenty of head room so that she can card herself on either side and lie down naturally.

When the stanchions are open, ready for the cows to enter, the attendant, by the simple throwing of a bar, closes the open spaces on one side of the stanchions for an entire row of stalls, no matter how many. It works so easily, a child can handle it.

As soon as the cows are locked in the stanchions, by the same easy movement, all the swinging posts are swung back against the stall partitions, entirely out of the cow's way, giving her unobstructed freedom of movement. She has just as much room at the head of the stall as she has at the rear—and she needs it.

With the James Stall of 3 feet 6 inches in width, the cow has head room of 40 inches, 20 inches on each side of the center of the stanchion.

The Lock Open Device

The Sure Stop Swinging Post, of course, closes the opening only on the side of the stationary bar of the stanchion; the open arm of the stanchion serves as a stop on the other side.

To prevent the stanchion from swinging when the cow is entering, James Steel Stanchions are furnished with a U-shaped Lock Open Clip which engages the frame of the stall.

The wood stanchions are furnished with a Chain Lock Open Device which accomplishes the same purpose.




Lack of Sure Stops Causes Loss of Time and Trouble.



Rigid Sure Stops Give the Cow Too Little Room.



Sure Stop and Lock Cows in Place. D. J. Stewart

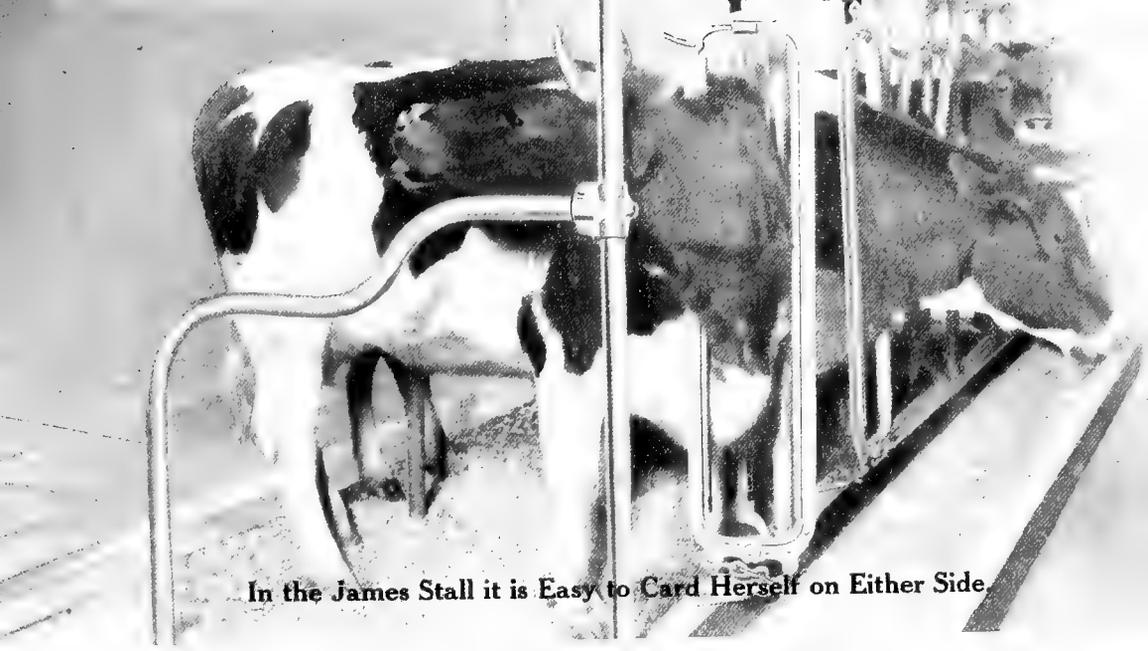

In the James Stall it is Easy to Card Herself on Either Side.



JAMES
 The James Sure Stop Swings Back Entirely Out of the Cow's Way.



Sure Stop Swung Back, Nothing to Interfere With the Cow.



James stalls give the cow as much room at the head as at the rear.

Wood Linings Are Necessary

The wood linings of the James Steel Stanchions add to the cow's comfort, and, of course, thus tend to increase the milk yield.

The iron or steel, while perhaps actually no colder than wood, feels colder to the touch.

The reason is that steel is a good conductor of heat—it absorbs heat much more readily than wood and gives off heat more rapidly.

Hence when steel comes in contact with the cow's neck, it feels cold and actually does tend to chill the cow because it is continually absorbing heat from her—heat which you furnish feed to supply.

Wood, on the other hand, takes up heat very slowly, being a non-conductor, and hence does not chill the cow.

A little experiment that will illustrate this fact may be made by simply taking hold of a steel pipe in the barn with one hand and placing the other hand on wood.

Note how long the steel will continue to absorb heat, chilling the hand, and how quickly the wood warms to the hand, ceasing almost at once to absorb heat.

Wood linings never become charged with frost—they are absolutely necessary in a metal stanchion if the comfort of the cow is to be considered.

The wood linings of the James Stanchions are made of birch, thoroughly seasoned for two years, carefully milled, shaped and polished; then dipped in oil and kept in the factory six months before used.

Linings are carefully fitted to the steel tees and securely attached.

The James Double-Chain Hanger


(PATENTED)

The James Double Chain Hanger enables the dairyman to save money when putting in the concrete floor and rounded curb—saves feed all the time—and lessens labor in taking care of the cows.

When building the curb, a great deal of labor and material is saved if the curb can be built level all the way through the barn. It takes time and wastes material to cut away the curb in each stall; for the wood concrete form must be cut to the shape of the opening desired, and this spoils the lumber for other purposes.

Besides, the cutaway curb disfigures the stall and opens wide a door for great waste of feed.

Before the invention of the James Double Chain Hanger, it was not possible to build the curb level, high enough to prevent the waste of feed without

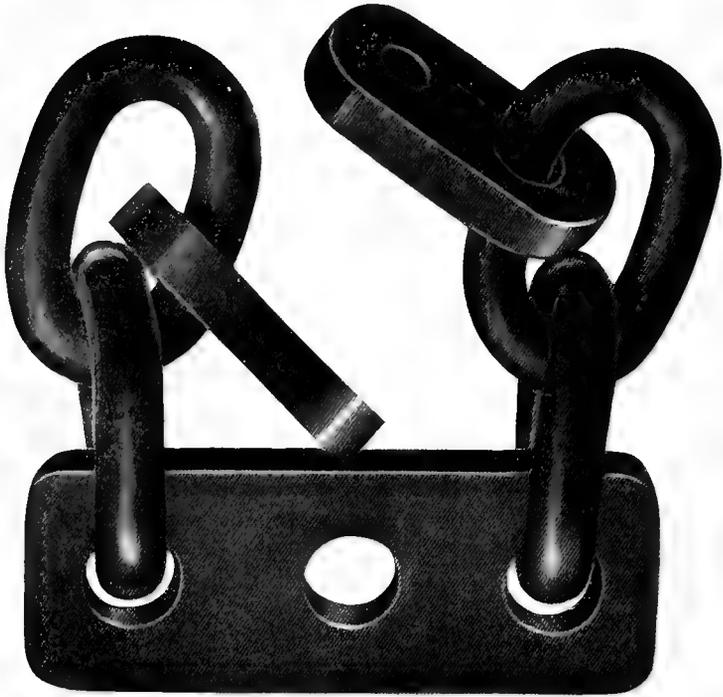


Actual size of James Double Chain Hanger Links.
Links $1\frac{1}{8}$ " long inside, $\frac{11}{32}$ " diameter.



Actual size of rivets used.

$\frac{1}{4}$ " x $1\frac{5}{32}$ " and
 $\frac{5}{16}$ " x $1\frac{1}{16}$ "

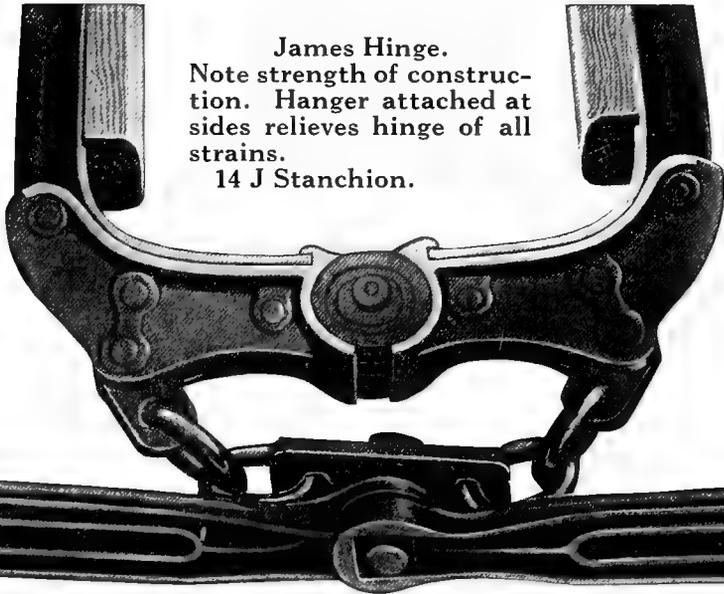

James Hinge.
Note strength of construction. Hanger attached at sides relieves hinge of all strains.
14 J Stanchion.



Actual size of rivet in hinge.

lifting the stanchion so high that it seriously interfered with the cow's comfort when lying down.

To solve this difficulty the James Double Chain Hanger was invented.

It permits the building of a level curb, six inches high, preventing the cow from nosing the feed out of the manger, back under her feet.

At the same time, the stanchion hangs low enough so that the cow's head will be not over 10½ inches above the stall floor when lying down, which is the cow's natural position; and the stanchion has sufficient play to permit the cow to rise without bruising her shoulders.

The Double Chain Hanger also prevents objectionable side play of the stanchion, preventing the cow reaching over into her neighbor's manger.

This James invention accomplishes another important improvement, by separating the chain hanger from the hinge.

The old way was to attach the chain hanger to the hinge itself, thus weakening the stanchion at the point where the greatest strength was required. The hinge got all the strain and leverage, and in time, like a piece of wire bent back and forth, would break.

The James Double Chain Hanger is attached like tugs to a hame—the strain all comes on the side bars of the stanchion and not on the hinge itself.

The links of the James Double Chain Hanger are hung in such a way that it is impossible for the chain to kink, causing wear and a weakening of the links. Where a slack single chain is used the links will oftentimes buckle and kink, just as the links of a watch chain will kink when held slack between the hands and then given a quick jerk. The buckling throws great strain and wear on the misplaced links.

Another advantage of the Double Chain Hanger is the absence of noise.

The Double Chain Hanger is furnished with flat steel links and washers at the points where attached to the alignment irons and the stanchion. The flat steel link lessens friction and resists wear.


The Hinge

As "a chain is no stronger than its weakest link" so a stanchion is no stronger than its vital part—the hinge.

The hinge in the James 14J Stanchion is almost everlasting. It is a two-piece, interlocking, continuous hinge of best malleable, with a very wide bearing surface which gives it remarkable strength.

It has many times the strength actually necessary; and with the hanger chains so attached as to relieve the hinge of all undue strains, absolute assurance is given that the hinge will withstand the most severe use.

The hinges used in other James Stanchions are different in design but equally strong and efficient.

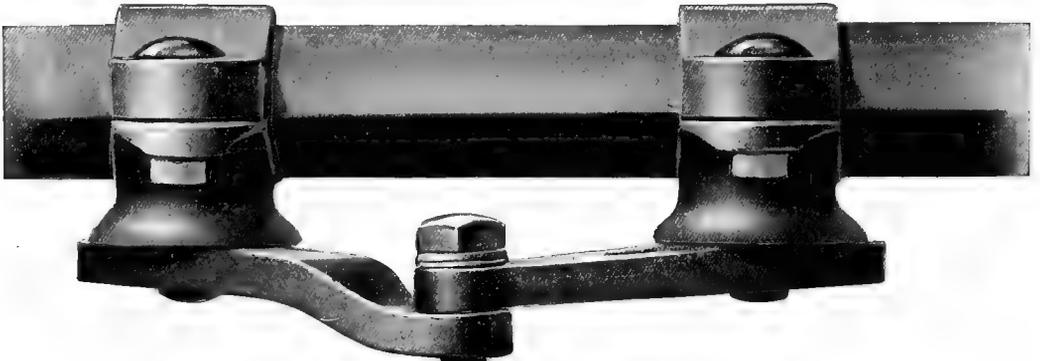

Actual Size
of eye bolt.



Formed from
 $\frac{1}{2}$ " x $5\frac{1}{2}$ " blank
machine bolt.



Shaft of lock is
 $\frac{1}{4}$ " square, cold
rolled shafting
 $3\frac{15}{16}$ " long.



The James "Door Knob" Lock.
Cow Proof
14 J Stanchion

The Cow-Proof Locks

If a stanchion is to be worth anything at all, its lock must be cow-proof.

A stanchion that a cow can open is a source of danger and a constant cause of trouble.

Only a man who has had the experience knows how big a nuisance a stanchion lock can be when it is not right; for it takes but a very little time for a cow, loose in the barn, to do a lot of damage.


The James Locks are guaranteed to be right in every way, cow-proof—yet easily opened by an attendant even when wearing heavy mittens or gloves. May be opened quickly from the front or from the rear of the stall. Simply slamming the stanchion shut locks it securely.

The “Door-knob” type of James Locks shown on the opposite page is opened just as you would turn the knob on a door. It opens easily even though the cow throws her weight against the stanchion—yet no cow can open it.

The James locks are safety locks from every standpoint. For economy and efficiency they are in a class of their own and have had much to do with the supremacy of the James Stanchions.

Stall Frame

The James Stall Frame is made of standard weight pipe, $1\frac{5}{8}$ -inch outside diameter for the uprights, thickness of wall .14-inch, subject to the usual variation of 5 per cent under or over. The horizontal of the frame is of the same material, $1\frac{1}{2}$ inches square, thickness of wall .125 inch, subject to variation named above. The square pipe prevents the alignment device from twisting, even when the bolts on the fittings are not drawn tight. If a round pipe were used for the horizontal, the alignment device would twist, dropping the stanchion enough to cause the eye bolt to wear.

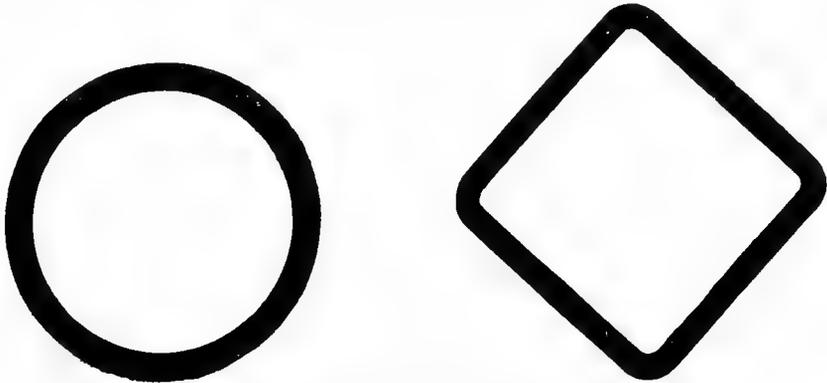

Exact diameter and thickness of wall of Stall Post
and square horizontal pipe



$\frac{7}{16}'' \times 1\frac{3}{4}''$
Carriage Bolt



Actual size bolt
 $\frac{7}{16}'' \times 1\frac{1}{4}''$

James Sanitary Fittings

(PATENT APPLIED FOR)

All fittings on James Steel Stalls are malleable, of the sanitary type, with overlapping flanges, held together with cut thread bolts of ample size.

The illustrations on page 110 show how the edges of the two pieces of the fitting overlap in such a way that when drawn together by tightening the bolts, no openings are left in which dust can collect.

The openings at the ends of the horizontal square pipe, the ends of the Sure Stop Posts and of the rod connecting the sure stops are also closed with a malleable, sanitary ornament.

The ordinary malleable casting has rough fins or gate marks (where the casting is poured). These are ground smooth on all James fittings.

James Stall Partitions

A prominent veterinarian tells us:

"Not a week passes but that I am called to treat a cow with a badly injured teat or udder, having been stepped on when lying down, by the cow next to her."

The Telling-Belle Vernon Dairy Company, Cleveland, Ohio, after speaking of the increase in milk yield and saving in labor say:

"Aside from this we have had no damaged udders since the installation of your equipment which of itself is a tremendous saving in the production of certified milk. Formerly, we had to take out many cows, some permanently and others for varying lengths of time, owing to injuries received by adjoining cows stepping on the udders."

George Steiner, Lomira, Wisconsin, writes: "I have not had a teat stepped on like with the old stalls. The James outfit over the old style is better in dozens of ways already mentioned in your book 'The James Way' and to make mention would be needless repetition."

Mr. Chas. F. Welter, Kaukauna, Wisconsin, states: "I wouldn't take double the price I paid for the James stalls and stanchions if I couldn't get any more. The stalls are worth a good lot to save the cows' udders, as in the old way I had two cows that each lost one teat by having been stepped on by another cow."

You yourself have doubtless known many a valuable cow thus ruined.

No careful dairyman will be without stall partitions for they are invaluable protection for both the cow and the milker, if the partition be of the proper design.


A partition that is too short or that is not of the right shape to afford protection to the cow is, of course, merely a brace for the stanchion frame and is an encumbrance to the stall.

With such a partition, the cow, when lying down, is exposed in a way that a neighbor may tramp on her udder. This happens not only in stalls without any partitions but in stalls where the partitions are short and incomplete.

And, of course, if the partition does not protect the udder of the cow, it will not protect the milker from the cow behind him.

The James Triple Curve Stall Partition, on account of its length and peculiar shape, makes such injuries impossible. It protects both the cow and the milker, at the same time bracing the stanchion frame and doing away with all ceiling posts and supports; keeps the cow from moving away from the

James Triple Curve Partition
as regularly furnished

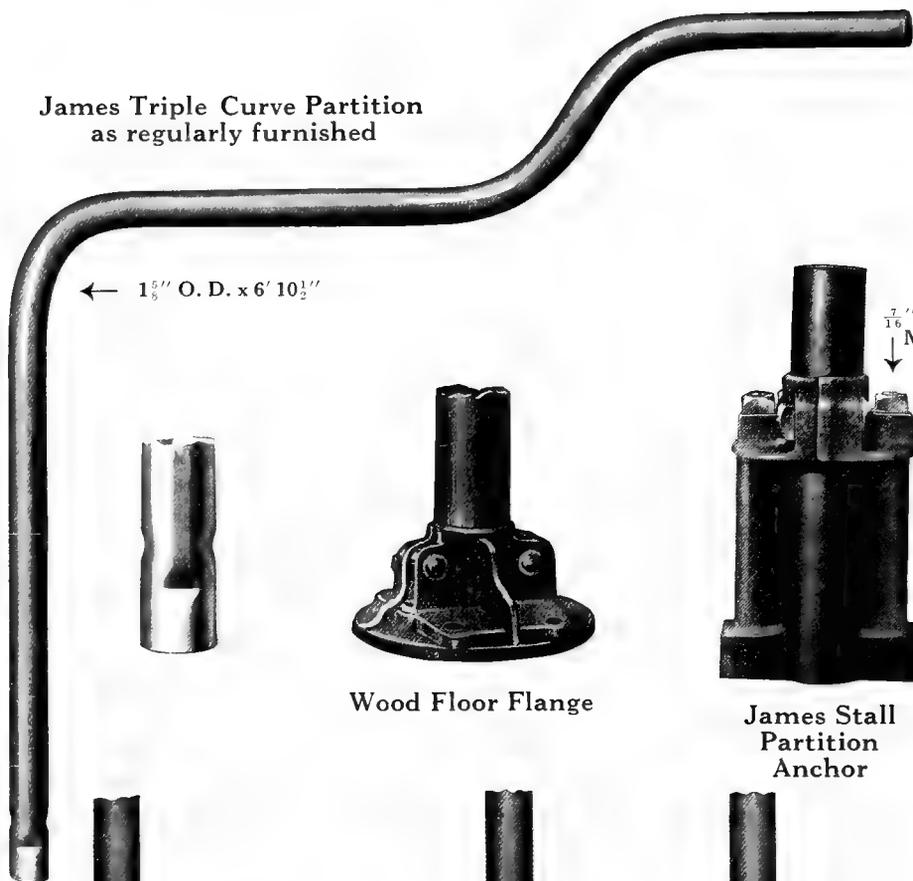

← 1 5/8" O. D. x 6' 10 1/2"



Wood Floor Flange



7/16" x 5 1/2"
M. B.

James Stall
Partition
Anchor



Extra charge is made for necessary fittings to attach partitions to steel columns 3 1/2", 4 1/2" or 5" in diameter and for cutting partitions to fit. Clamps for other sizes of columns than listed must be made up special from forgings and splicing of clamps, for each of which an extra charge is made.

milker; prevents her from swinging around so that the litter falls on the platform; and prevents two cows from lying down in such a position as to prevent a cow in between them from lying down at all.

The downward curve of the James Stall Partition permits the cow to turn her head and leave the stall more quickly and easily than she can with the single radius partition.

James Partitions are of piping $1\frac{5}{8}$ inches outside diameter, the length being 3 feet 6 inches. They will neither bend nor break. Length of pipe from which the partition is made is 6 feet $10\frac{1}{2}$ inches. Furnished with both wood and steel stalls. Fastens to wood stanchion frame with hook bolts and to steel frame with our special malleable fittings. Height of partition can be regulated to suit the breed of cows, by setting partitions deeper in the concrete for the smaller cows.

James Stall Partition Adjustable Anchors

(PATENTED)

Some have argued that the stall partitions will rust just where they leave the cement floor and for that reason they desired a stall partition anchor that would enable them to replace the partition, or enable them to reset it in the floor.

Others have wanted stall partitions so made as to enable them to adjust the height of the partition to suit the size of the cows occupying the stalls.

We have developed an adjustable anchor that we can recommend, believing that it will withstand every strain and fulfill its purpose perfectly.

James Anchors permit a 5-inch adjustment of the partition up and down in the cement floor, so that the partitions can be set higher or lower at will.

This is done by simply loosening the bolts which clamp the fitting to the partition and the bolts which clamp the partition tee to the stall post; raising or lowering the partition as desired; then tightening the nuts again.

Should you want to remove the partition entirely, you can do it quickly and easily; and it is just as simple a matter to replace it or put in a new one.

Should the partition ever rust at the floor line, the James partition anchor will save you the cost of a new partition; simply loosen the bolts, lower the partition until the anchor gets a grip on the solid metal, tighten the bolts, and your partition is good for many more years of life.

If you want to change the height of the partition to suit the size of some new cows you have purchased, it will take you but a moment—if you have the James anchors.

The design of the anchor is such that practically the entire anchor could rust away, yet the bolts would hold the fitting and partition firmly to the cement floor.



Alignment Adjusted for Short Cow.



Alignment Adjusted for Low Cow.

James Alignment Device

PATENTED

The James Alignment Device permits the adjustment of the stanchion forward or backward in the stall, lengthening or shortening the stall to fit the cow. It aligns all the cows—long, short and medium—at the rear, so that manure falls in the gutter instead of on the standing platform.

It keeps the stall clean, hence keeps the cow clean, and saves work in the cleaning of the cow and the stall; lessens the amount of bedding required; and insures a bigger yield of milk because the clean, dry stall affords the cow greater comfort and promotes better health.

The barn is more easily kept in a sanitary condition; and the labor item is reduced to the minimum and the appearance of the barn vastly improved.

If you want to get a line on the labor saving effected by the alignment device, just figure out the time required to groom your cows each day and what that time costs you. You will then better appreciate the fact that the alignment device is the greatest improvement ever made to promote cleanliness of the cow and sanitary condition of the barn and milk.

The James Alignment has seven adjustments, providing not only for seven sizes of cows, but also providing for the same cow in seven stages of growth. It has an adjustment of 10½ inches in all.

The James Alignment Device is patented and because other manufacturers have no right to manufacture or sell such a device they sometimes attempt to persuade purchasers that this valuable feature of the James Stall is worthless—that it will not accomplish its purpose.

There is one convincing answer to all their arguments.

That answer is, the James Alignment Device *is* doing all we claim in thousands of dairy barns right now. It *is* saving time and labor for the fortunate owner; it *is* keeping the cows clean.

You need not take our word for it—read the following letters received from dairymen who are using the James Equipment.

And remember—we also have hundreds of similar letters from owners just as enthusiastic that we will gladly send you. If you want to see them, send us a postal card, asking for these letters; then, should you wish, write to any of them, enclosing a three-cent stamp; you will get an answer.

B. C. Settles, Palmyra, Mo., says: "After a thorough trial of the James Stalls with my cows last winter I want to say there never was a time that I had to clean any manure off their udders."

Edward Van Alstyne, Kinderhook, N. Y., writes us: "I have two-year-old heifers standing side by side with full-aged cows, and both stand just over the drop."

Read this from C. J. Orn, of Barron, Wis.: "James Equipment keeps my cattle clean at all times, and therefore saves time for the men taking care of the herd. Cows also milk more when comfortable."

And this from W. E. Colwell, Kittanning, Pa.: "I find the James Stalls save me money, and my cows have never done better than they have this winter; my cows are all as clean as in summer."

Another letter from Mr. J. W. Breyfogle, Three Rivers, Mich., comments thus: "The Alignment Device saves me time and money. While you take time to wash five or six cows I can milk half that number; since I have had the James stanchions I have not washed the cows, yet they are perfectly clean and ready to milk."



Barn of F.P. LANSING
MAY




Barn of N. J. Dwyer, Jr.
Franklin, Mass.
Equipped the James Way



Barn of R. F. Hood & Son
Beverly, Mass.
Equipped the James Way




Barn of
Hamilton, N. Y.
Equipped the James Way

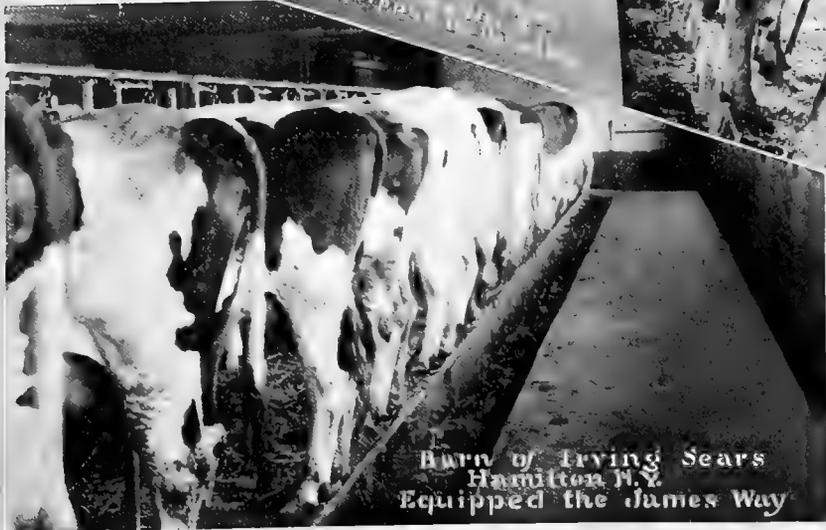



Barn of Irving Sears
Hamilton, N. Y.
Equipped the James Way

Anchor for James Stanchion, Galvanized
(PATENTED)
Bolts $\frac{1}{2}$ " x $1\frac{1}{2}$ "

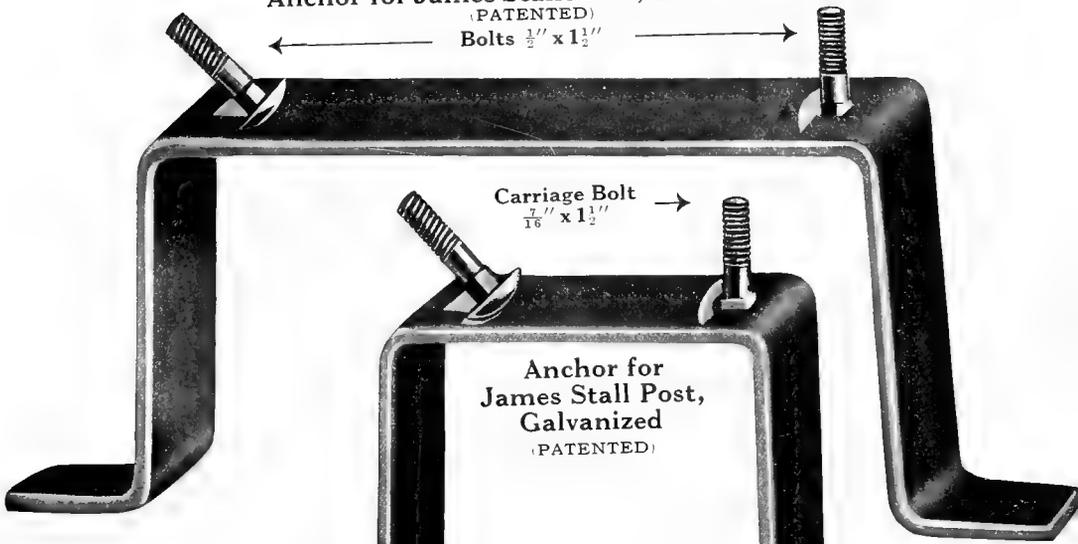

Carriage Bolt
 $\frac{7}{16}$ " x $1\frac{1}{2}$ "

Anchor for
James Stall Post,
Galvanized
(PATENTED)

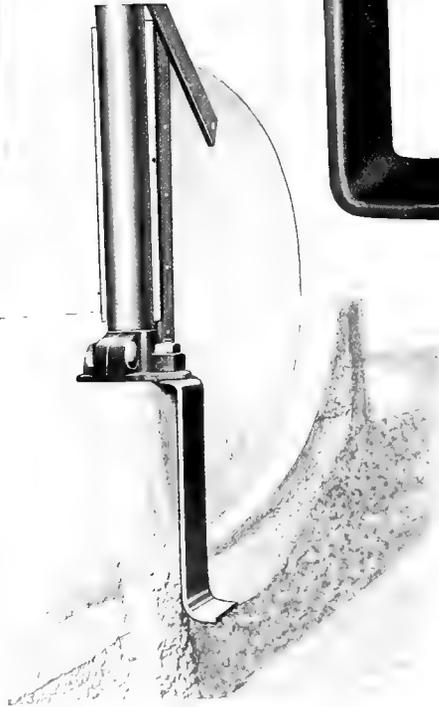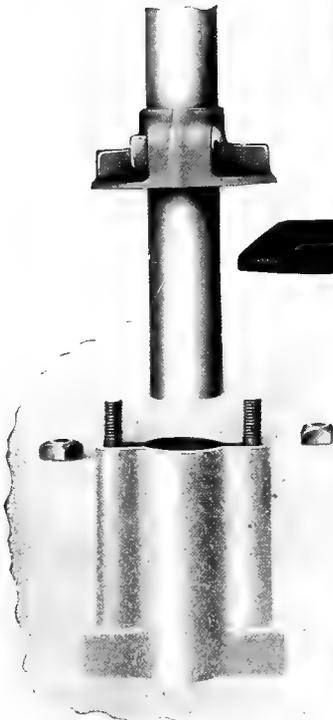

James Anchor
for Stall Partition
PATENTED

The Easy James Way of Erecting Barn Equipment

The pictures on the following pages tell an interesting story of the greatest advance in barn equipment, since the time Mr. James first originated the essential features of the cow stall.

It is a plan that reduces the whole proposition of erection to one of absolute simplicity.

This James idea makes so simple and so easy the setting up of cow stalls, and bull, cow and calf pens, that no experience is needed.

It enables any man who is building or remodeling a barn to go right ahead with the cementing of the floor, without waiting for the arrival of the equipment itself.

No delays—no grief while waiting for equipment—no concrete men idle because the material isn't on the ground or because some necessary parts have been lost in transit.

You Can Start Cementing Tomorrow

The identical principles of barn building and barn equipment that we—as originators—have been presenting to the dairy world from year to year remain as they were.

All the basic ideas that have brought success to barn owners are preserved.

We simply make James Equipment better than ever before by providing a new and easy way of setting it up—a way that makes it unnecessary for you to hire skilled help—a way that makes it unnecessary to delay your cement work or other building operations a single day.

James Anchors Only Thing Needed

When ready to begin cementing the floor, all you need to have on hand in the way of barn equipment is the required number of James Anchors.

If your cement men are ready to go to work, have them come ahead.


You will be ready for them—The James Way—because you need only James Anchors to begin work.

The anchors when you receive them, have templates (anchor spacers) attached—the templates being scored and marked, with nail holes already drilled.

You mark off the proper spacing on the form for the concrete curb, according to simple directions furnished with each job.

The anchors—which later are to hold the stall posts and stanchions—are set in the form at the proper points, nailed in place and the form filled with concrete.



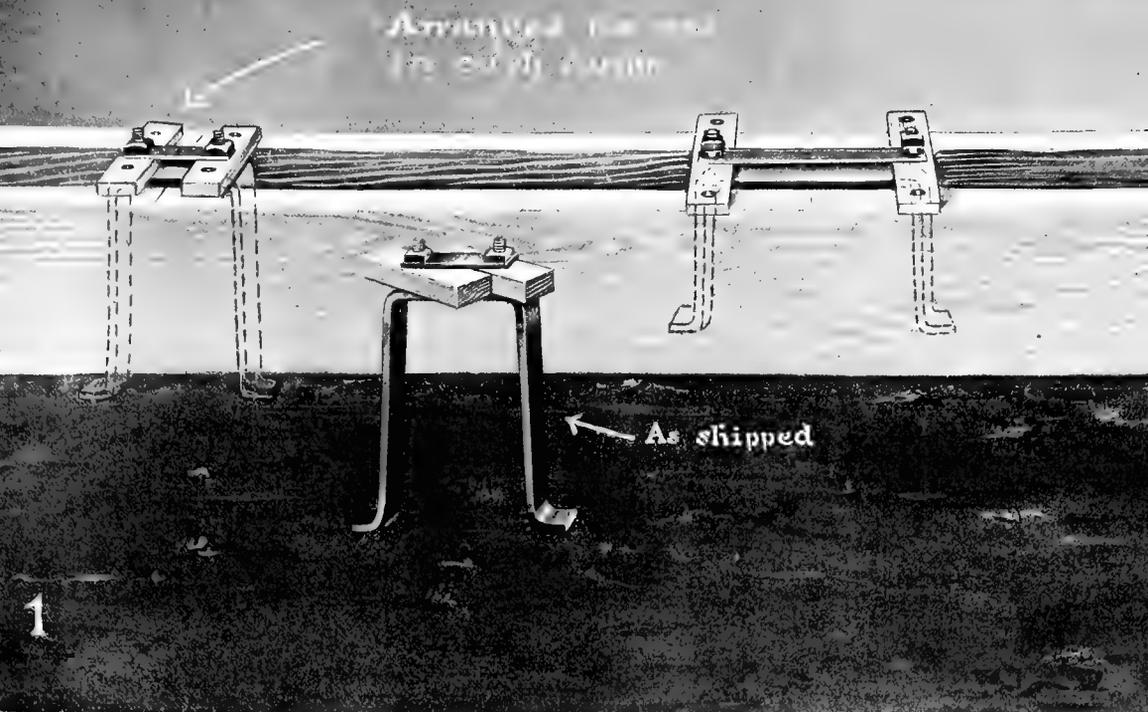



You can then go ahead finishing up the cement floor. The stalls and pens may be set up at any time later when most convenient.

When the concrete is set, the templates are removed and thrown away and the stalls may be quickly bolted into place.

On account of the shape of the anchors the curb is less liable to be cracked by the expansion and contraction of the metal than it is when the upright pipe extends through the concrete curb.

Assembled Stalls—Knocked Down for Easy Handling and Convenience in Erection

No boxes filled with small parts—no long lists of little pieces—no complicated directions—no difficult checking to see whether you are short anything.

Instead, the equipment reaches you assembled—the fittings bolted in their proper places on the stall frame. To put the stall together, you simply loosen the bolts in the tee fittings, insert the uprights, stall partitions and other parts of the stall—then tighten the nuts.

You can't go wrong in erecting James Equipment. No expert help is needed. One man can do it all, and the work of erecting is so simplified that it takes but a very short time.

Quick Shipment of Anchors

You can get the anchors immediately—by express if you need them at once—From Fort Atkinson, Elmira, Minneapolis, Wright Ziegler Co., Boston, De Laval Dairy Supply Co., San Francisco, or from some nearby distributing point.

For the convenience of our customers and to provide quick service, stocks of James Anchors will be carried in many places throughout the United States.


Almost without exception, regardless of where you live, it will be possible to deliver the anchors to you at your express station within twenty-four hours, should you need them that quickly.

Setting Up the Stalls

Even in the pictures it is difficult to show how simple it really is to set up the James stalls and pens. All the fittings are put in place on the stall posts, partitions, horizontal bars, sure stops and sure stop connecting rods at the factory, before shipment. There is no searching for the proper parts—no lost parts—everything is simplified so that a boy can understand it all.

Picture No. 1 shows the anchors with templates attached set in the concrete curb form, ready for the concrete to be poured.

No. 2 shows anchors in place and the form filled with concrete.

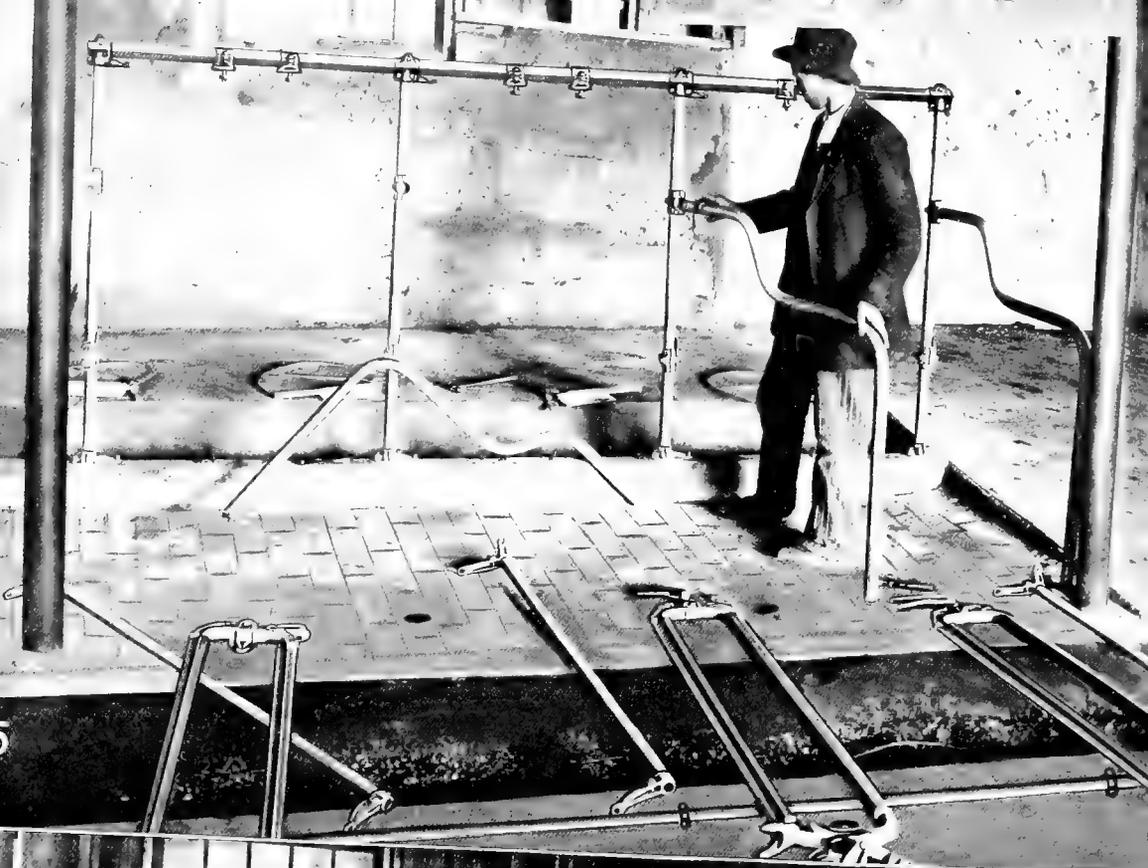

No. 3 shows a man attaching stall posts to the bolts in the anchors in the concrete curb.

No. 4. The square horizontal pipe is next put in place on the stall posts and the nuts tightened.

No. 5. Attaching the stall partitions—one end being bolted to the stall, the other imbedded in the floor, or bolted to the partition anchor, if the anchor is used.

No. 6. The stanchion is easily attached to the anchor provided for that purpose, and to the fittings on the square horizontal pipe.

No. 7. The sure stop swinging posts are quickly hung on pins which form part of the fitting at the top and at the bottom of each stall post. This is more clearly shown on page 110.

No. 8. The rod connecting the full line of sure stops is easily attached to the sure stop posts.

No. 9. The manger division is easily put in place.

No. 10. When complete manger is ordered, the manger lifting springs are put in place on the stall posts before leaving the factory.

No. 11. The manger is shipped knocked down for convenience in handling. The manger front and manger partitions may be quickly bolted together without difficulty and manger attached to the hinge fittings on the stall posts.

No. 12 shows how the manger and stall look when complete.

Erecting Pens

Setting up the James Pens is just as simple, it being necessary to set only the panel supporting posts and gate posts in the tubular anchors and bolt the panels to the posts.


Herman Olson, Cambridge, Wisconsin, says: "James equipments are unbeatable; with the high-class materials and carefully adjusted fittings, it really is a pleasure to install them according to the blue print directions, as everything goes together so precisely correct with the diagram."

Mr. George Steiner, Lomira, Wisconsin, writes: "I am a James booster all the time because I have faith in the goods and the Company and everything fits according to the plan to a dot. A neighbor bought another kind of equipment and nothing fits. The plan was not a plan at all. It was a fake."



Robert J. Porter, Harmarville, Pa., says: "My father bought the James sanitary stalls and he is very well pleased with them. I am 16 years old and I put them all up myself without the help of anyone. The day they came, I went to the station and got them and had all but the mangers on before he saw them. I followed your directions and found it very easy and am mighty proud of them for they certainly are great."

How James Equipment is Finished

All metal parts of James stalls, stanchions and pens, are first mechanically cleaned, removing scale, grease and foreign matter, thoroughly preparing the material for painting.

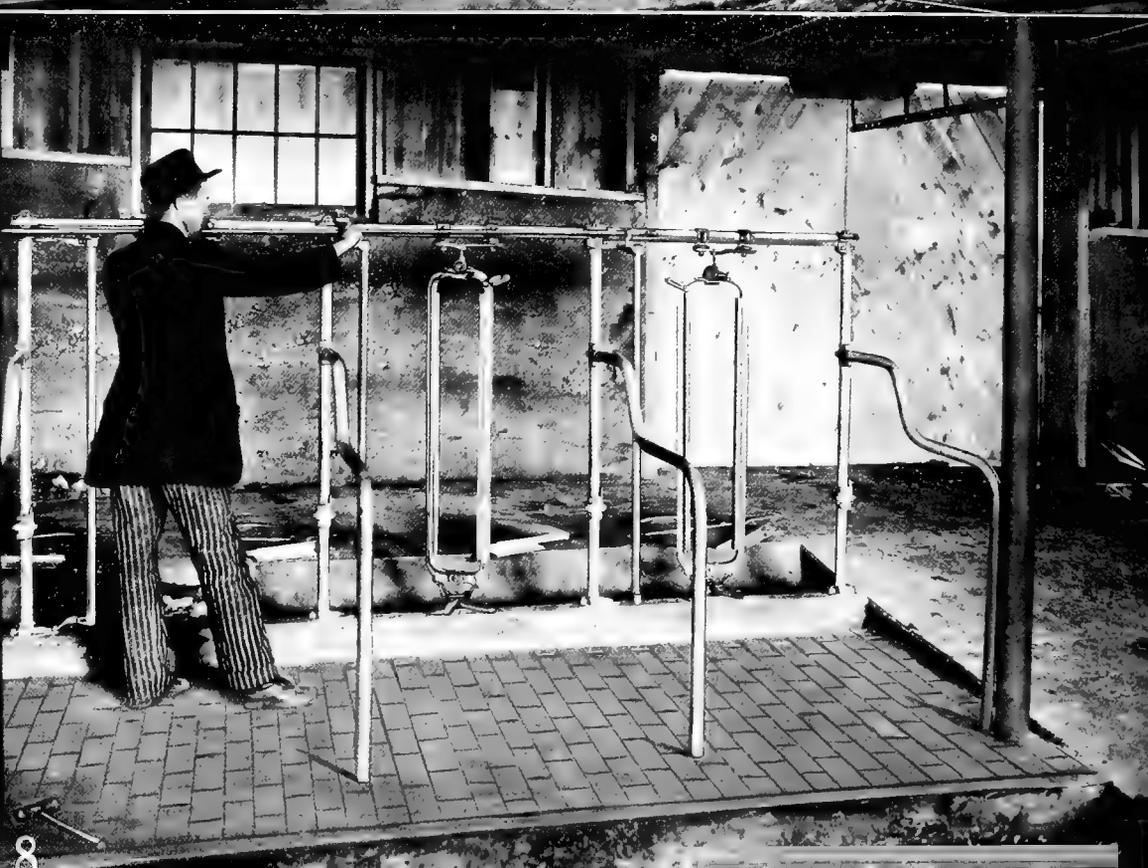



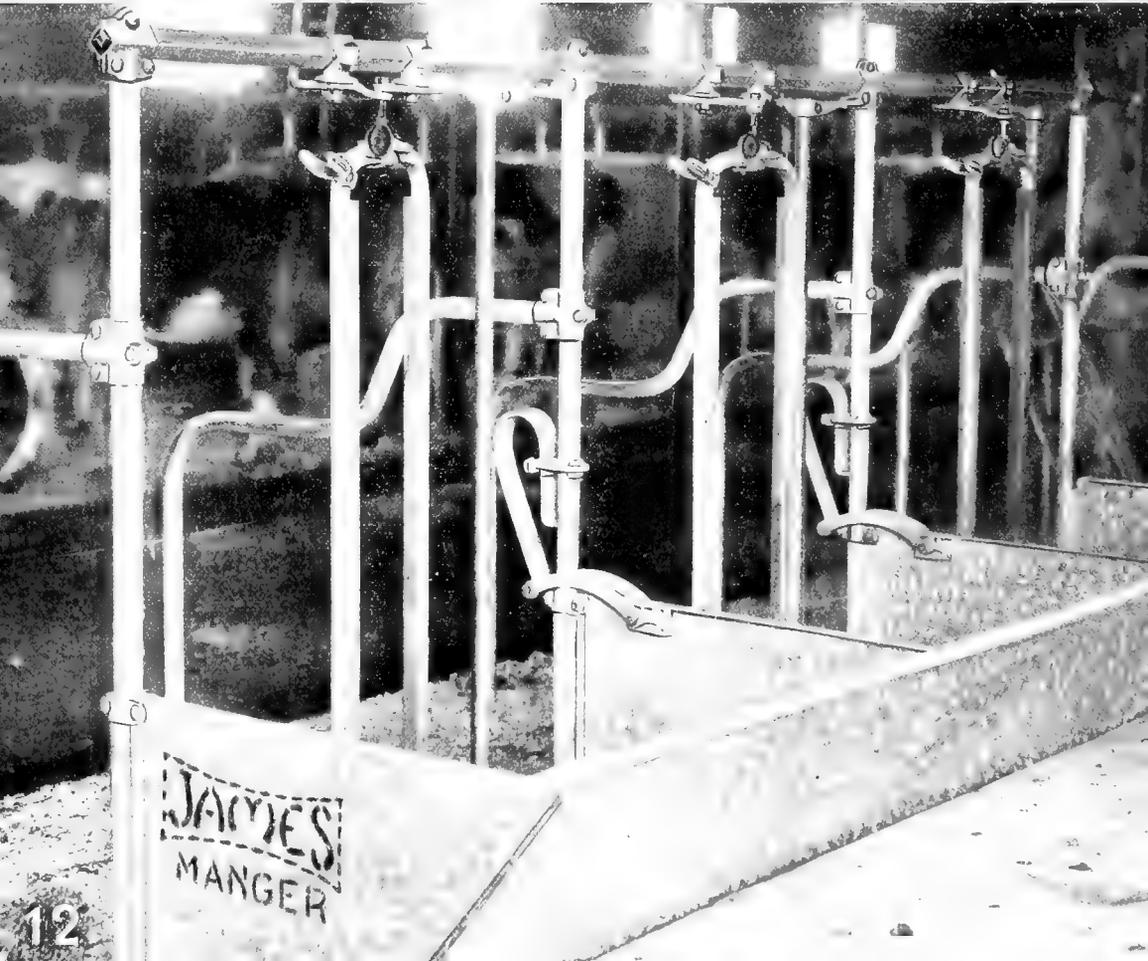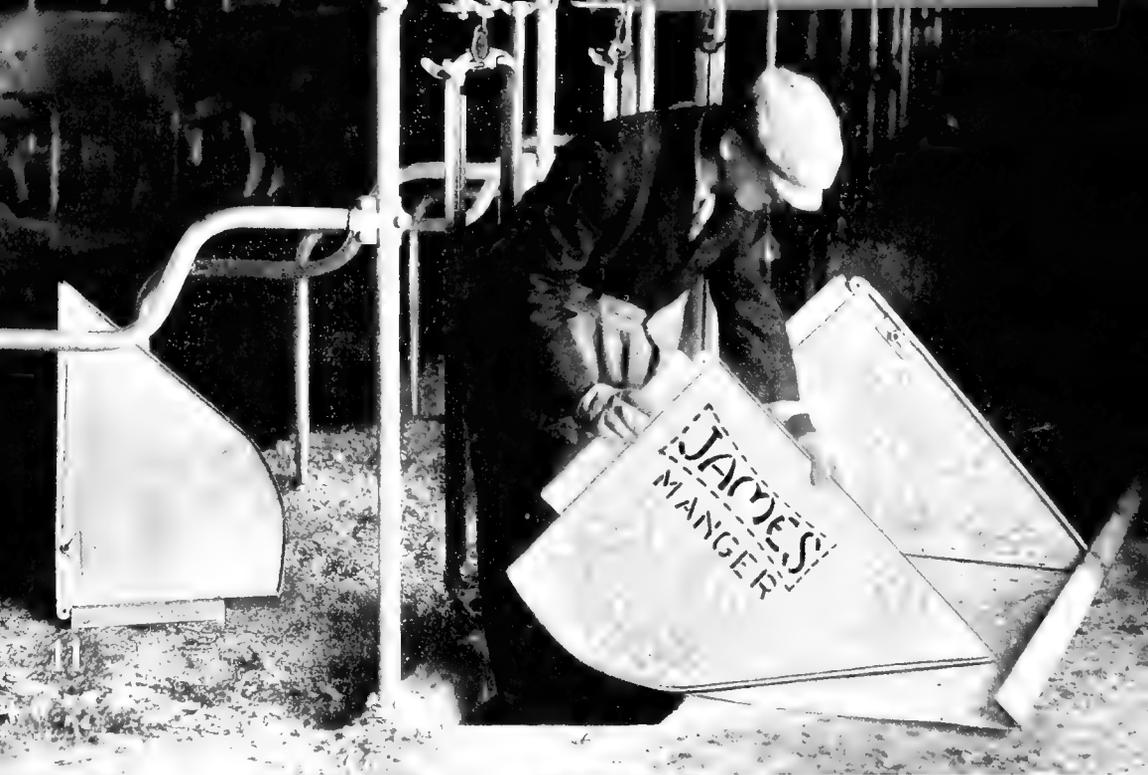

It is then finished with the best gray protective enamel made expressly for us under our own formula, based upon a thorough investigation, numerous tests and research work for the best enamel to be used on dairy barn equipment. After applying this enamel on the clean metal, it is thoroughly baked for two hours at a high temperature.

The elastic yet hard surface of the enamel, baked on, gives a lasting protection—one that will resist blows without flaking off. The color of the finish is known as battleship gray, this color being most suitable because it gives a handsome finish that will not soil easily, helps to make the barn brighter, and has exceptionally high protective qualities.


With each shipment sufficient paint is sent to cover all marks or scratches received in shipment.

Our experience has shown that the electro galvanizing is not satisfactory; and the hot process of galvanizing, on account of the heat required, makes the malleable iron parts brittle. The surface also is not smooth and is less easily kept clean. We, therefore, recommend the enamel, baked on.

Mangers and carrier tubs are always furnished galvanized.



The Fast Eater Robs Her Neighbor Without Individual Mangers

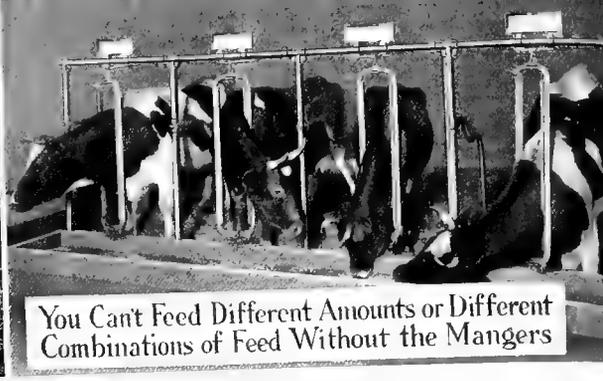

You Can't Feed Different Amounts or Different Combinations of Feed Without the Mangers



No Cow Can Steal from Another if James Mangers are used



James Mangers are Easy to Clean

The James Complete Manger

(PATENTED)

Not only does the James Complete Manger enable you to feed each cow individually, preventing underfeeding and overfeeding and troubles incident thereto; but it also does away with the labor required in keeping a rigid manger clean; prevents waste of feed; eliminates the principal cause of big knees; and prevents abortion and other injuries brought on when straining for feed thrown out of the cow's reach or belonging to her neighbor.

Successful dairymen seem to agree that, to get the best results, each cow must be fed separately.

Scarcely any two cows in a herd require the same amount of feed; and it is just as bad for a cow to get too much as too little.

A cow that gets too much feed may be put out of the profit class for a month.

You can't feed your cows individually on a level floor or in the continuous trough. The cow that eats fastest gets too much and the slow eater next to her gets too little.

Neither produces what she would if fed individually and the heavy eater is likely to be ruined.

Besides overfeeding or underfeeding your cows to their injury and your loss, you waste feed by such a method.


The necessity for individual mangers in order to feed correctly was demonstrated forcefully at the National Dairy Shows. In the feeding test department, the exhibitors using stalls without mangers were required to put in temporary individual mangers. Otherwise they could not meet the conditions of the competition; thus proving conclusively that some kind of a manger division is necessary.

Without a manger division, it is impossible to feed scientifically, giving each cow the particular combination of feeds, as well as the particular amount, on which she will best thrive and produce the greatest yield.


Big Knees on Dairy Cows

The principal cause, almost the sole cause, of big knees on dairy cows, is the method of feeding in flat bottomed mangers or without any manger at all.

If you feed that way, watch your cows. To get all their feed they are obliged to go to their knees to reach it. The knees strike the curb or floor, and, standing in this position for a considerable time during each feeding, the cow develops big or sore knees.

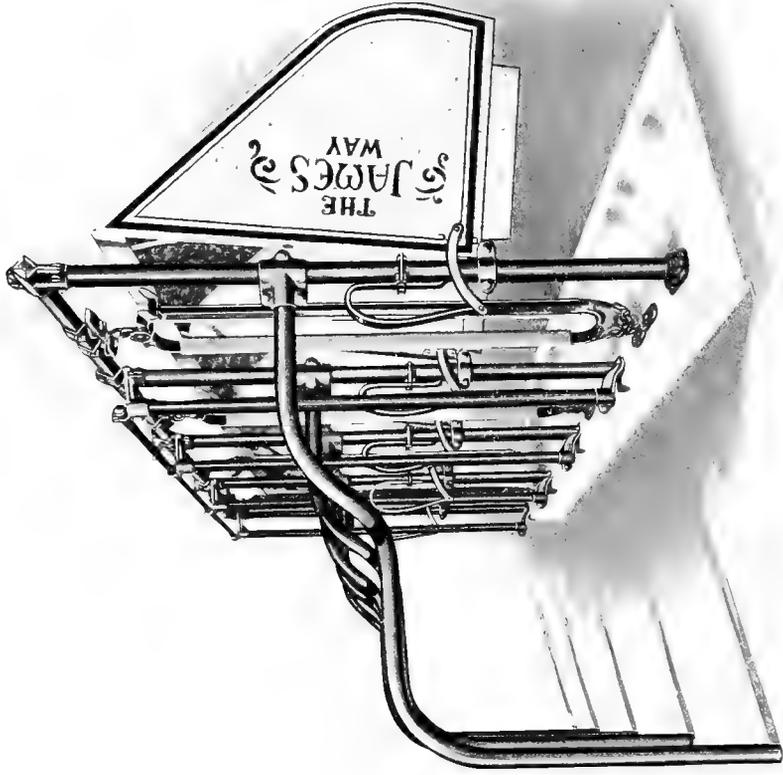

The springs hold the manger up in position when manger is raised.

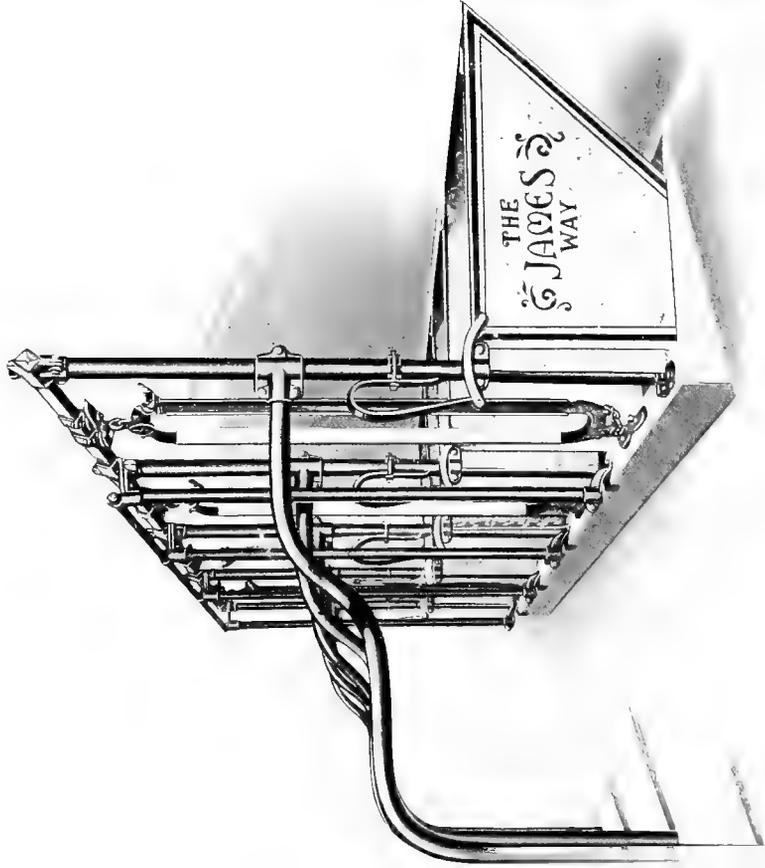

Manger lifting springs are so designed as to prevent cow from raising manger with her horns.

PATENTED)

How Abortion is Sometimes Caused

Not only are big knees caused in this manner, but in pushing herself forward, striving to reach the feed, the cow's hind feet slip and push her bedding into the gutter.

A sudden slipping of the hind feet, or straining for feed beyond her reach, sometimes causes abortion or perhaps permanent injury to the cow.

The Self-Cleaning Feature

The James Manger has no bottom, a concave trough in the cement floor serving that purpose. The manger is easily lifted, the weight being offset by heavy manger lifting springs.

When the manger is lifted, everything in the trough can be conveniently and quickly swept out, flushed with water if desired and used as a watering trough.

The bottom of the trough is so shaped that the feed comes in exactly the right spot for the cow to reach it most easily, even to the last mouthful—the feed always accumulates in the center of the trough directly under the cow's nose.

The Manger Construction

The manger is constructed of No. 20 gauge best galvanized sheets.

The front of the manger, in sections of three stalls or less, is formed from 20 gauge copper bearing galvanized sheets, both the front and the partitions being strongly reinforced with folded and compressed edges. The front of the manger is bolted to the partitions.



The U-shaped guard which is riveted to the back of the manger partition, overlaps the stall post and holds the partition firmly and rigidly at the back; while manger front and partitions are reinforced by V-braces, except at ends.

This rigid construction of the James Manger absolutely prevents any racking and adds years to the life of the manger.

The U-guard also permits setting the stall posts in the center of the concrete curb, so that the curb is not liable to crack—as it is when the posts are set near the edge of the curb.

With all its labor, feed and money saving advantages the James Manger costs no more than a home made one of wood.

Whether you order mangers or not, be sure to obtain from us the wood pattern of exact shape of the manger bottom. This will enable you to make the concrete manger trough so that a perfect fit will be secured if you later decide to have the mangers. The manger pattern is absolutely necessary if the mangers are to fit the trough properly.

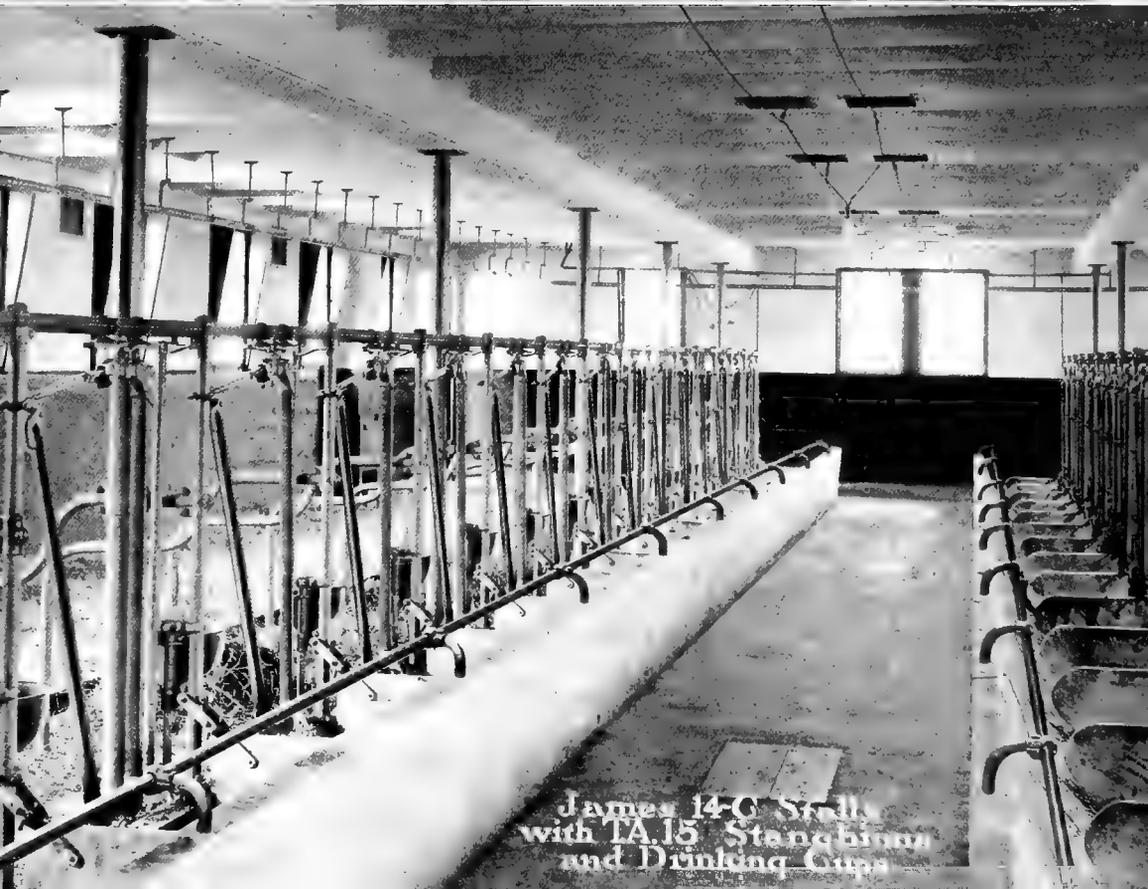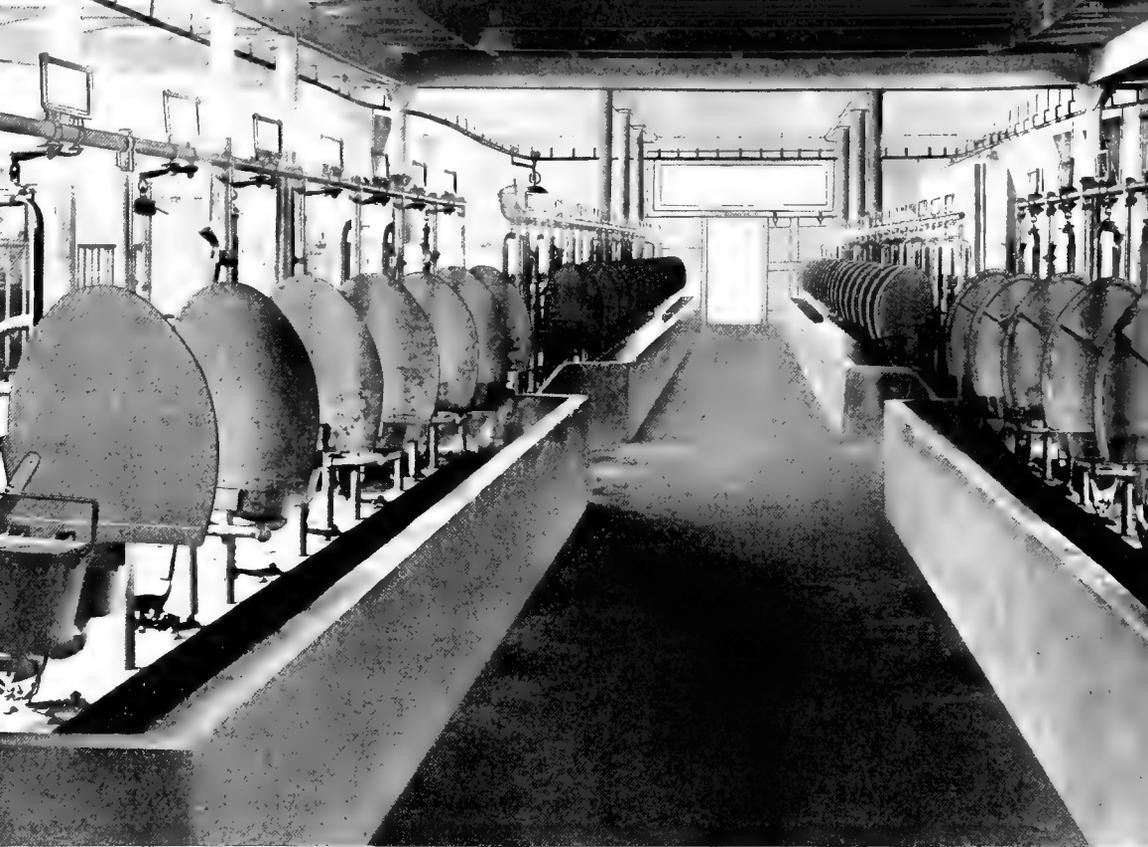

James 14-C Stalls
with 1A.15 Stanchions
and Drinking Cups

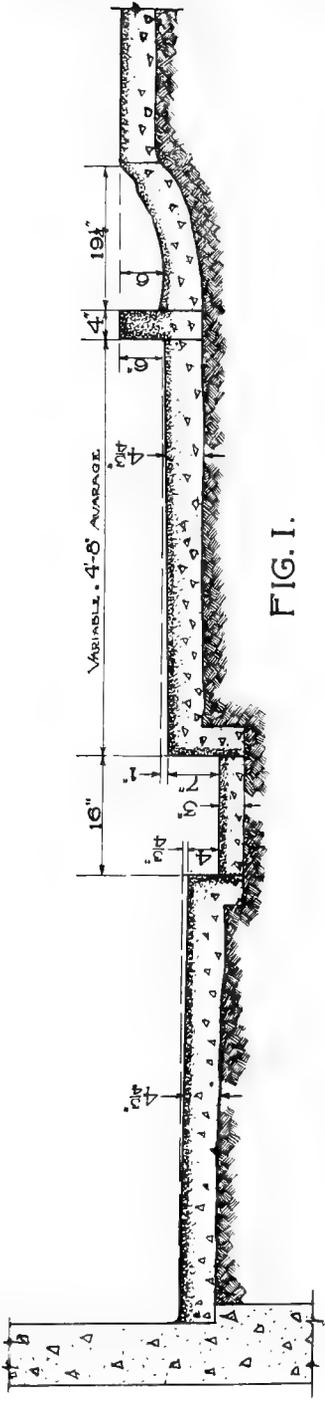


FIG. I.

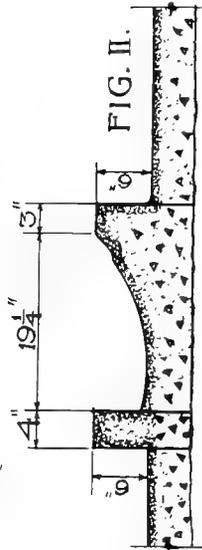


FIG. II.

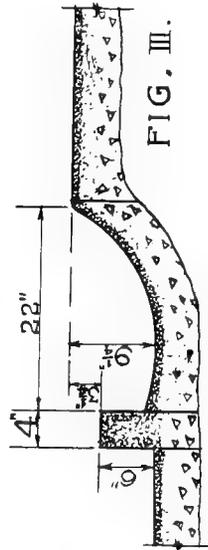


FIG. III.

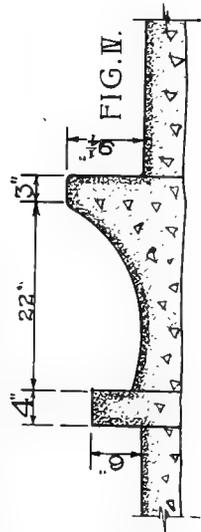


FIG. IV.

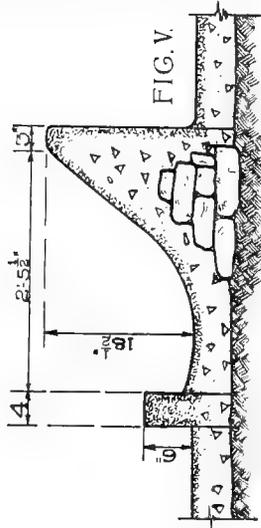


FIG. V.



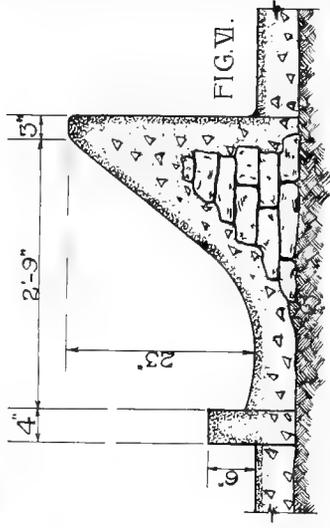


FIG. VI.

Types of concrete manger fronts commonly used.

Choose the one best suited to your needs.

Figs. 1 and 2 can be built by use of wood pattern for James Complete Manger; Figs. 3, 4, 5 and 6 can be built by use of wood pattern for James Manger Division.

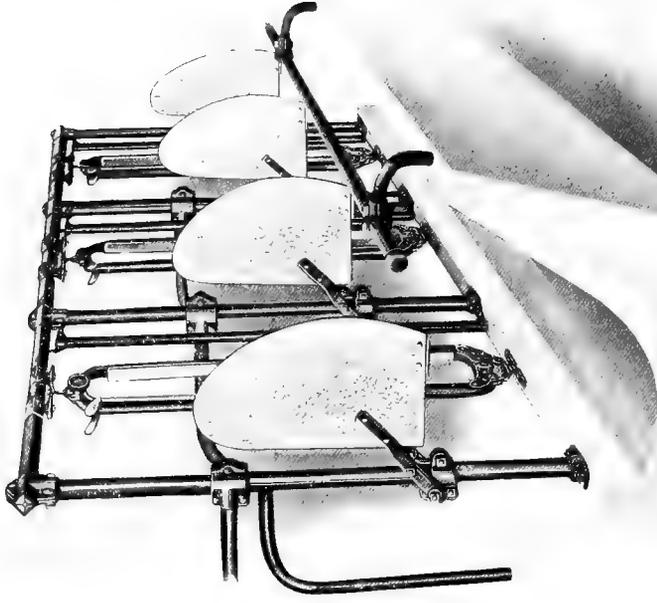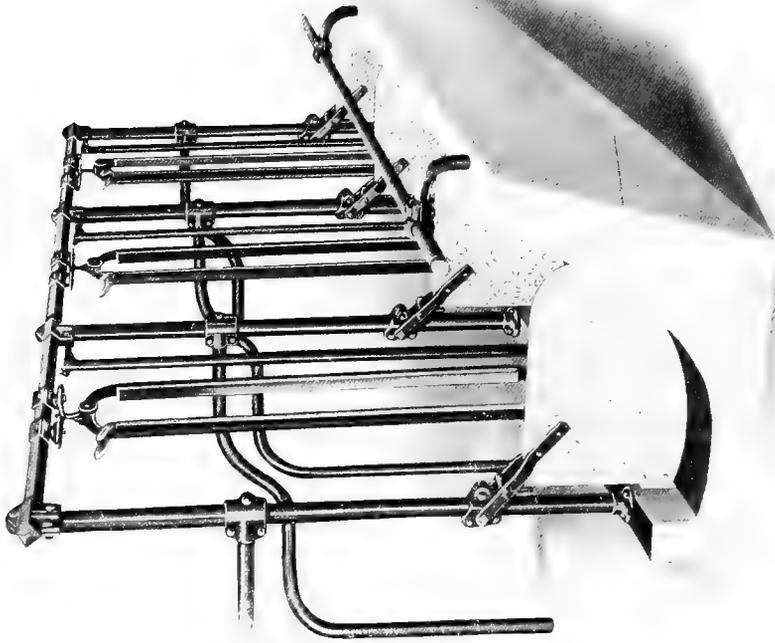

James Manger Divisions

PATENT APPLIED FOR.)

An ingenious latch holds division up when raised

Manger Lifting Springs

The Manger Lifting Springs are so adjusted that when the manger is down, the tension of the springs and the weight of the manger prevent the cow from lifting it.

But when the manger is raised a few inches, past a certain point, the pull of the spring offsets the weight of the manger, making it easy to lift; and then holds the manger up in position.

The springs reduce the strain on the manger, for each spring pulling evenly on the manger partition does away with racking when manger is raised, thus adding to the manger's life.

The springs are of special design of cold drawn, flat spring steel, oil tempered and tested for severe use—the same as the best automobile springs. The tension is easily adjusted, should adjustment ever be needed.

It is sanitary, and presents a neat appearance in the barn.

Regularly furnished, four Manger Lifting Springs to each five stalls.

James Manger Divisions

(PATENT APPLIED FOR)

In various barns already built, which we have been called upon to equip, we have found concrete mangers of such design that the James Complete Manger could not be used.

To meet this condition and make it possible for every dairyman to have individual manger compartments for feeding, we have designed the James Individual Manger Divisions. These can be made special to fit any concrete manger by furnishing us an exact pattern of the trough, at an extra charge.

These manger divisions as regularly furnished are fourteen inches high; which is sufficiently high to prevent a cow from stealing feed from her neighbor.

Divisions are made of eleven gauge galvanized sheet steel, 14 in. high and $21\frac{5}{16}$ in. wide. The strong, heavy, malleable hinge will not slip and holds the division firmly in position.

When raised the division is held in place by an ingenious holder. See cuts A, B and C, page 138.



The cuts on the opposite page illustrate the manger divisions. The manger curb can be built as desired; some of the more common styles of curb are shown on page 135.

Manger Pattern must be used in making manger trough, if Manger Divisions are to fit properly. Manger pattern is furnished free.

Manger Division Holder


This new ingenious device (shown in "phantom" in cuts A, B and C) adds greatly to convenience of lifting and lowering the manger divisions.

To lock in raised position "A" lift the division to "B", then let it *drop of its own weight*. The holder will catch on the clamp (as in cut "A"), holding the manger division up.

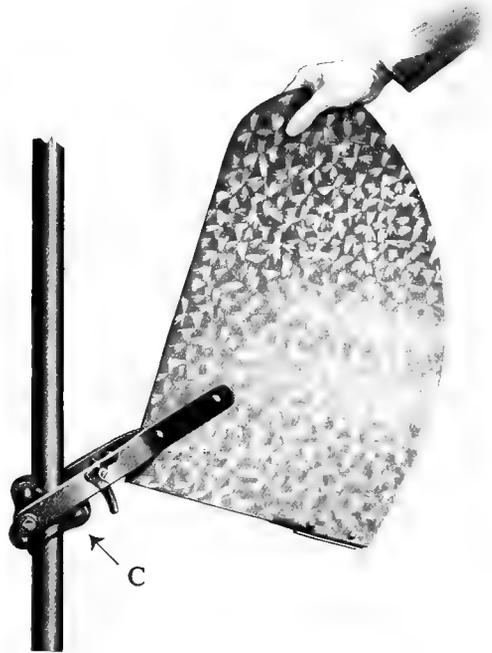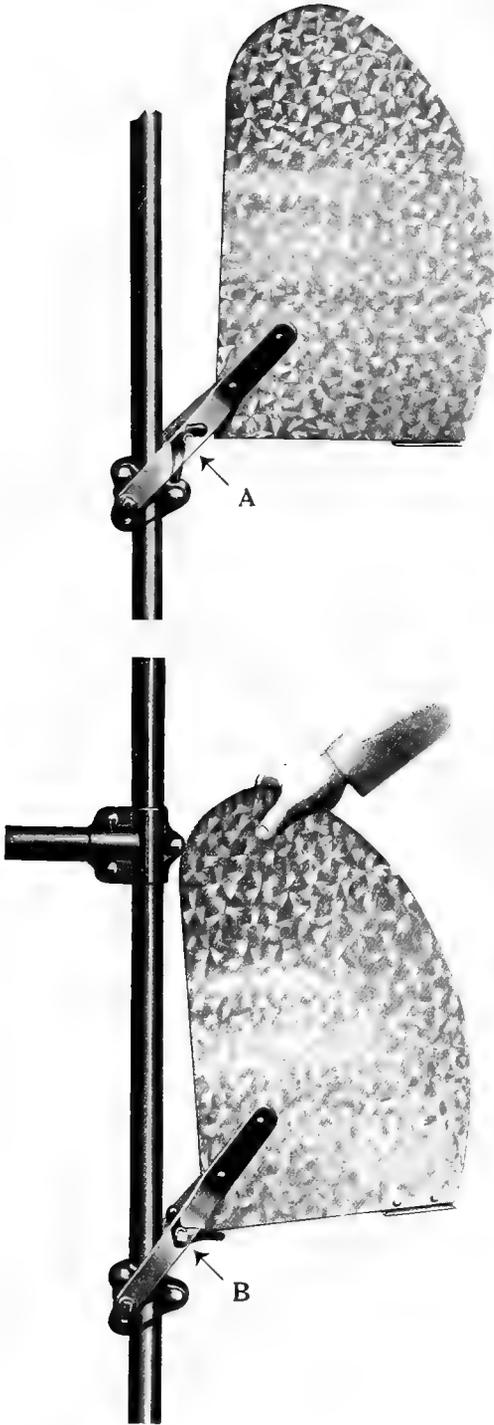

To lower manger division: From "A" raise to position "B", then a quick push downward will carry the holder past the clamp before the holder can catch. (See cut "C".)

James Stalls and Stanchions



THE James line of stalls and stanchions gives such a wide range of choice, both as to the equipment of the stall itself and the price, that any farmer can find a stall that just meets his needs.

In reality, there is just one James stall—there is but one standard of James quality—one way of finishing James goods—one system of inspection to make sure that every detail is right.

No matter whether you buy James stalls with or without the special features, you get the same class of stall. Differences in price are regulated entirely by the addition or subtraction of special features—not by the quality, or finish or inspection of the goods.

James quality is always standard, whatever combination you may buy. Your barn, equipped with James Grand Prize stalls, with or without the special features, will be a good barn.

Do not think that you must have all of the James special features in order to enjoy barn efficiency. The James stall is a unit stall; not only can James stalls be purchased in lots of any size from one up, and one or more stalls added at any time; but you can if you desire begin with the James foundation stall, and add any James special features later as you may want them.

You can equip your barn, step by step, not only as your herd grows, but you can add the special features, one by one, as you decide you need them.

James stalls are found in hundreds of the finest dairy barns in the United States; and they are also serving thousands of dairymen who are doing business on a smaller scale. The small barn that is equipped with James 14F or 14E stall is a James barn, through and through, and many dairymen who started with stalls without all the special features are adding James special features right along, because the equipment is making increased barn profits each year.

Each stall combination in the James line offers the greatest possible value to be found anywhere at the price.

There are many dairymen who feel that they are justified in investing only a limited amount in modern dairy barn equipment at the present time; and by studying the following pages, it will be made clear how any farmer can practically have stalls built to order to meet his own ideas as to price and yet be assured of James quality.

The James stall No. 14B is the foundation of all James stall combinations; all the others being based on the 14B, simply adding or subtracting certain labor, feed and money-saving devices, or substituting a different stanchion.



14 B with TA 15 Stanchion

Consider for a moment this foundation stall—the No. 14B which costs hardly more than a home-made wood stall.

The stall uprights are built of heavy selected pipe, 1 $\frac{5}{8}$ -inch O. D., thickness of pipe wall about .14 inch, rolled especially for this purpose.

The horizontal of the stall frame is of heavy pipe, 1 $\frac{1}{2}$ inches square, thickness of pipe wall about .125 inch.

The triple curve stall partition is made of the best quality of pipe, especially designed for the purpose, 1 $\frac{5}{8}$ -inch outside diameter, thickness of wall about .14 inch, accurately bent by our heavy special machinery.

This partition not only braces the stanchion frame, doing away with supporting the stalls by ceiling posts, but it also protects the cow and the milker, saving many a cow from a damaged udder.

The fittings are made of heavy best malleable, and are of the sanitary type—the edges overlapping, leaving no opening for the accumulation of dust.

The stall upright, the horizontal part of the frame, and the stall partitions, are bound firmly together by these heavy malleable fittings, into a substantial, durable frame. The fittings are readily drawn together by bolts to the exact shape of the pipe, and when the bolts are properly tightened, have a vise-like grip. Only cut-thread bolts are used with these fittings.



Most dairymen realize that a sure-stop post of some kind is required at the time the cow is entering the stall; but to afford the cow maximum comfort, this sure-stop should be swung out of the cow's way, after she has been locked in the stanchion; doing so, gives her plenty of head room to card herself on either side, and to lie down naturally.

The swinging sure-stop is the only means whereby a sure-stop post can be in place when the cow is entering the stall, yet it can be thrown back out of the way when the cow is locked in her stanchion.

Many a dairy farmer has told us that the James alignment device is worth more than the price of the entire stanchion, and calls it the most valuable feature of the stall. This device enables you to lengthen or shorten the stall to fit the length of the cow, so that all cows are lined up at the rear on the gutter; the manure falls in the gutter, keeping the stall and the cow clean.

Stall 14B is fitted with the J14 stanchion, which has the James cow-proof door knob lock; the lock-open clip; wood lining; a heavy hinge of unusual strength; double chain hangers with flat steel links; James alignment device; and the James stanchion anchor which prevents future trouble through rusting of bolts imbedded in concrete.

It is no small task to properly erect stalls, the upright posts of which must be imbedded in the concrete curb. We have made such stalls for many years, and experience has demonstrated that it requires a mechanic to do a satisfactory job, because when the stall posts are set in place it is necessary to brace them from the ceiling and in the curb and keep them so braced until the concrete has hardened. The addition of the stall post anchors cuts the time and the

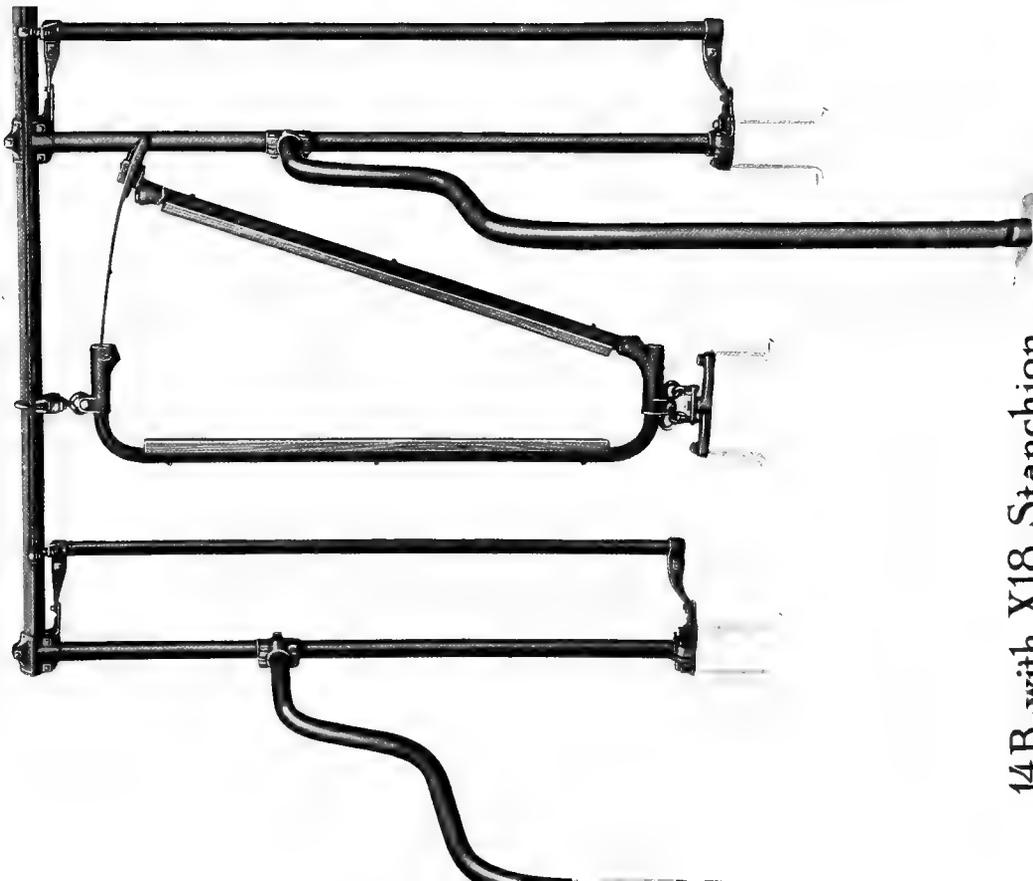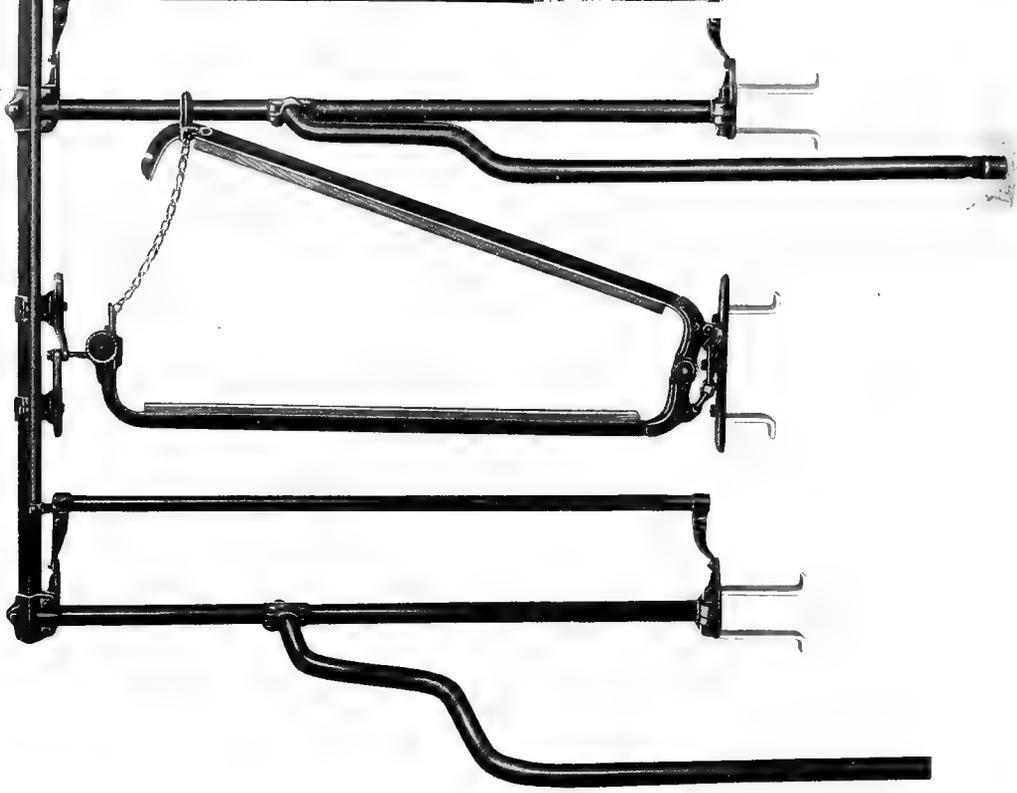

14B-with X18 Stanchion

expense of installation to the minimum, makes the erection of the stall so easy a boy can do the work, and assures a perfect job in every case.

We find that on the average job, the James system of anchors reduces the cost of installation from 35c to 50c per stall, and contractors who make a business of erecting barn equipment, will, if they have had experience, make a far lower price on the erection where James stalls and stall anchors are used because of this great saving of time and work.

This foundation stall, and, of course, all other James stalls, are finished in the battleship gray color. Every piece of metal is mechanically cleaned, all scale, grease and foreign matter being thoroughly removed, thus properly preparing it for painting. It is then finished with the best gray protective enamel made expressly for us under our own formula, thoroughly baked for two hours at a high temperature.

The stall is shipped with all fittings assembled on the frame, saving a great deal of time and trouble in erecting. The fittings being assembled before painting, the entire equipment is painted, including bolts and fittings.

Other Combinations

Other combinations can be made up by the addition of the manger divisions to stall 14B, as in stall 14C, or by adding the complete mangers as in stall 14A; and by the addition of the drinking cups; or the name plate holders; or by the substitution of stanchion TA15, T15, X18 or XA18.

Or, if you wish a stall lower in price than the 14B, stall 18E is the No. 14B with a rigid sure-stop substituted in place of the swinging sure-stop, and X18 stanchion in place of the J14.

Stall 14F is still lower in price, being the 14B stall without anchors, without sure-stop, and with X18 stanchion in place of the J14.

You will quickly see by a study of the following pages and by what we have said above, that from the James line you can make up a combination of special features that will give you anything that you may need in the way of service, or to fit your desires as to price.


Whatever the combination you buy in a James stall, the equipment will reach you already assembled, each fitting bolted firmly on the pipe. There will be no boxes of small parts, no lists of little pieces to check, nothing complicated. One man can erect it easily. You cannot go wrong.

SPECIFICATIONS

Pictures sometimes may be misleading. The picture of a light harness and the picture of a heavy harness might be made to look alike.


Photographs of a poorly-built buggy and of a buggy of the finest and most durable material and best workmanship might show no difference.

So it is with illustrations of stalls and carriers and other equipment. The pictures give but little information as to the true quality of the material used, the workmanship and the finish.

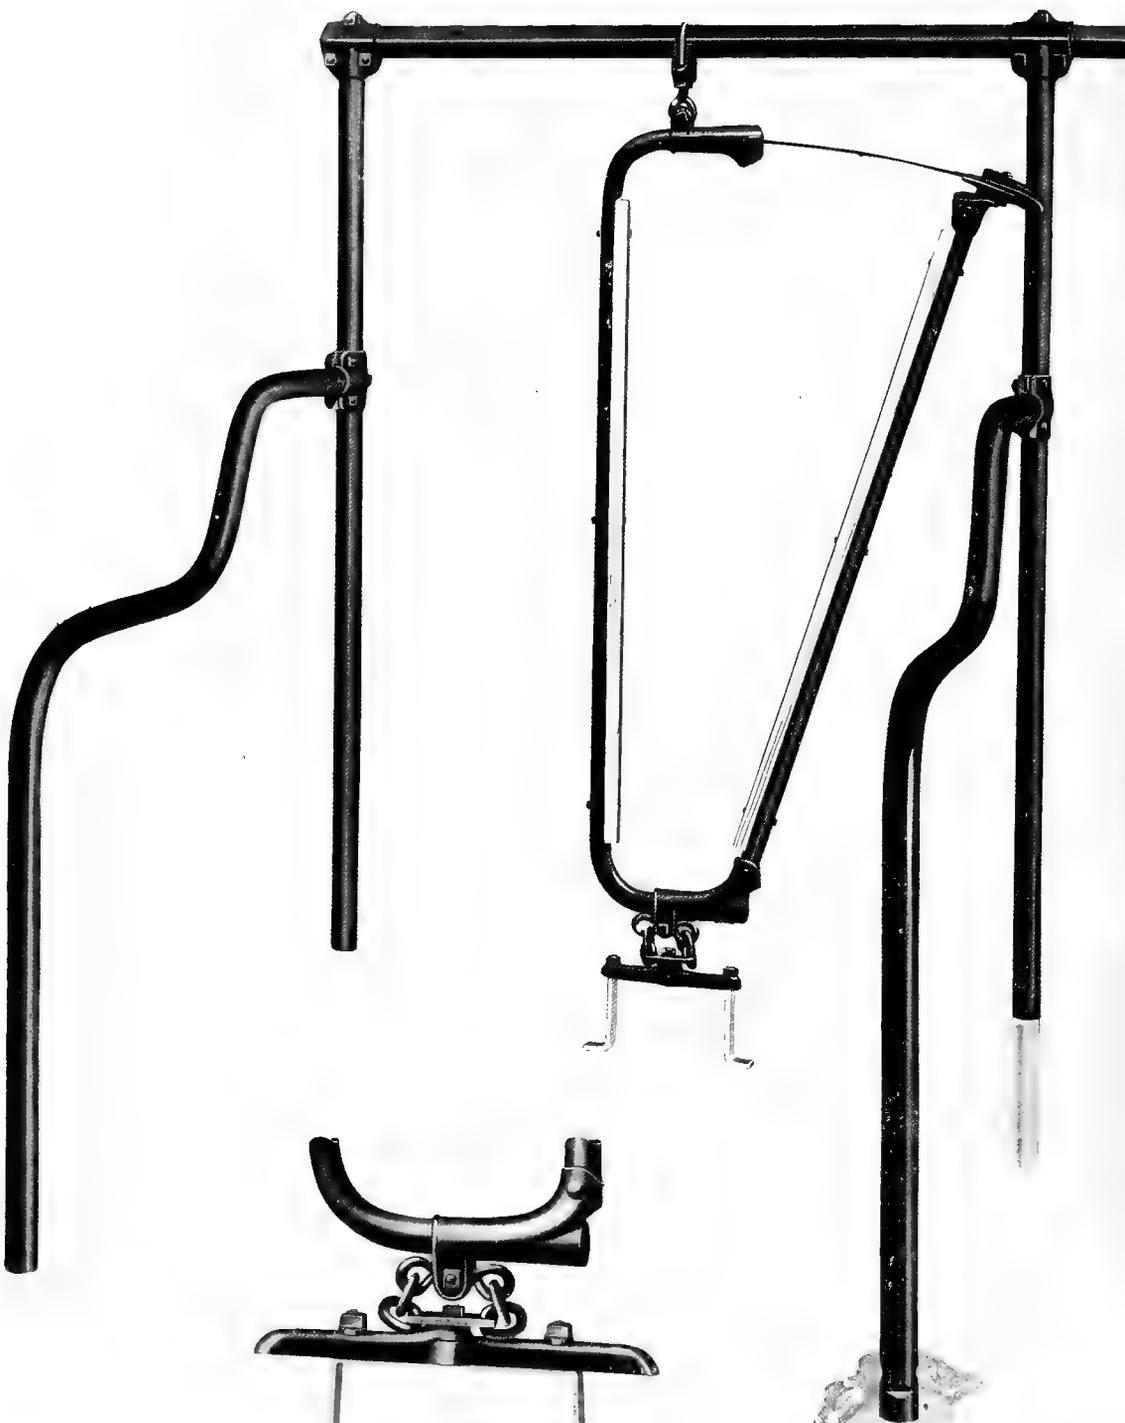

XA-18

18-F

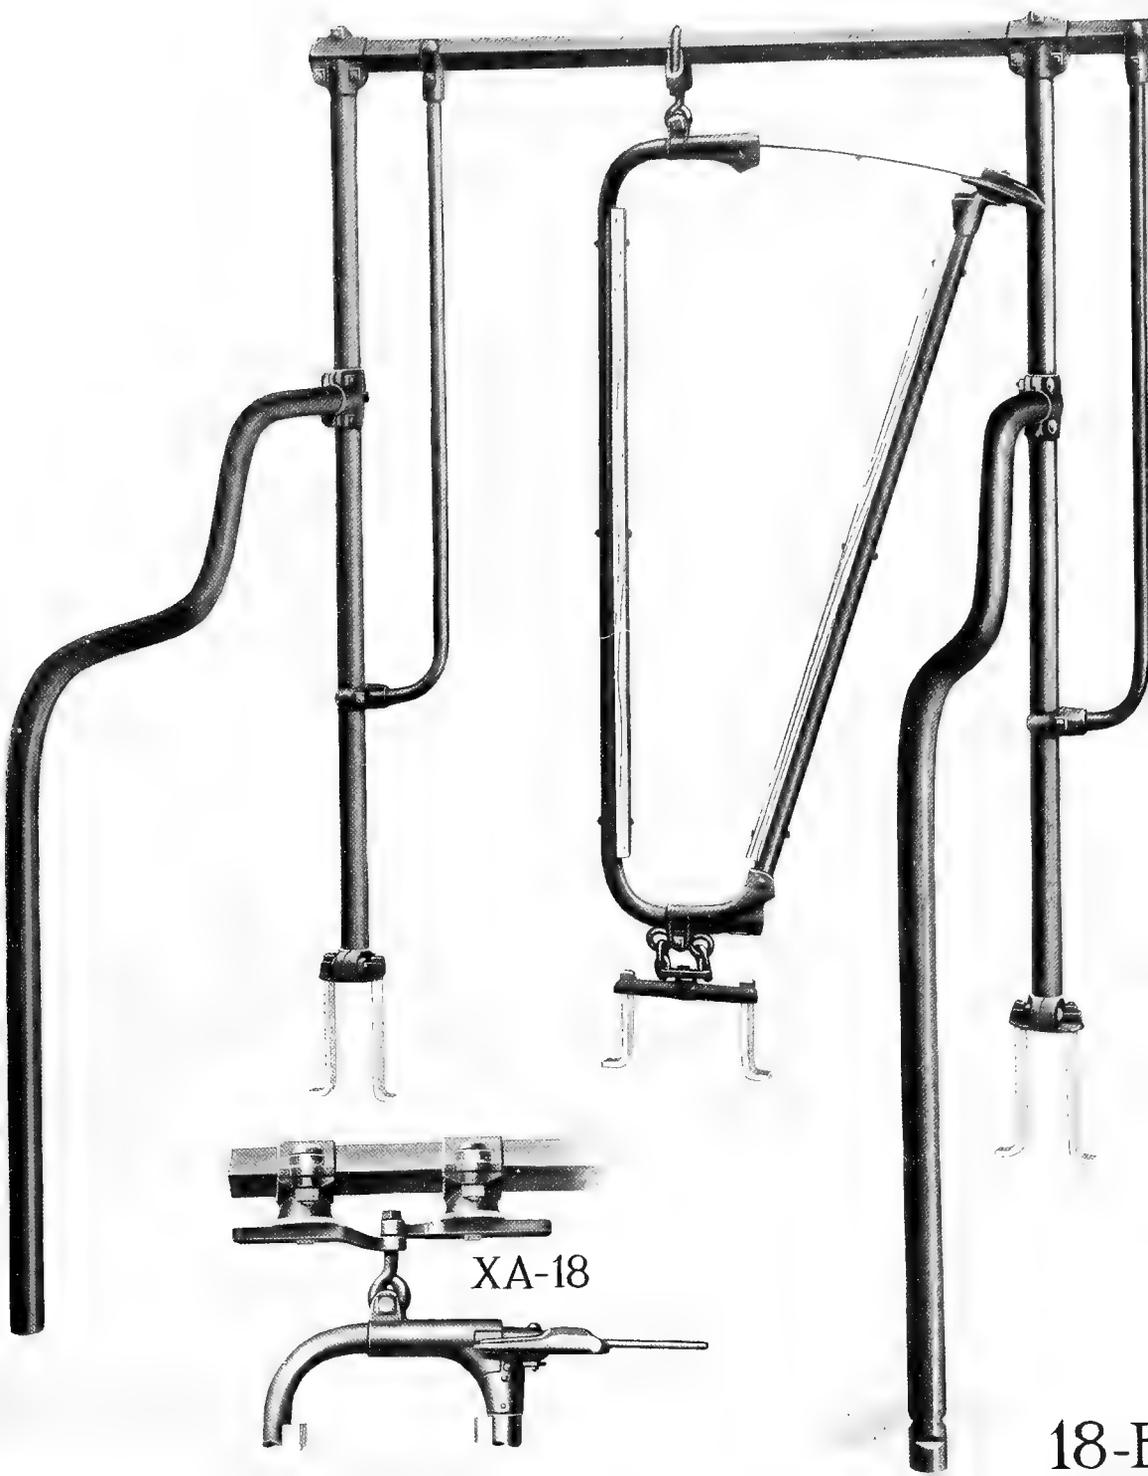

XA-18



14C-TA

If there be any doubt whatsoever in your mind as to the superiority of James goods, compare for yourself, if at all possible, James equipment with that other which you may consider buying.

If it be not possible to compare the actual goods, the best substitute is to make a careful comparison of the specifications. To enable you to do this, we give accurate detailed specifications in this book, of all items in the James line.

We ask that you note especially the weights of the stalls, carriers, pens and other equipment.

Although weight does not always give a true index to the strength (because there may be too great weight where strength is not needed and too little weight where strength is needed), nevertheless if two competing articles be equally well designed, the greater weight does indicate the greater strength.

In these days of high-priced steel and iron, it would be very easy for us to save a large amount on the cost of a stall or stanchion, simply by reducing the amount of material used; this might be done and no one the wiser, but there has been no skimping of material in the manufacture of any of the James equipment. James standards of manufacture and inspection are being maintained.

There are so many combinations that may be made in James stalls, that no attempt is made to show them all, but merely those which are most in demand.

THE STALLS

(PATENTED)

(See also pages 149-157)

The 18F stall is the frame "A" without sure-stop and stall post anchors. Furnished only with X18 or XA18 stanchions. Weight about 63 pounds with X18 and about 70 pounds with the XA18 stanchion.

The 18E stall is frame "A" with a rigid sure-stop of $1\frac{3}{16}$ -inch O. D. pipe and best malleable fittings, substituted in place of the swinging sure stop. X18 or XA18 stanchion. With X18 stanchion, weight about 66 pounds, with XA18 stanchion about 73 pounds per stall.

Stall 14B is frame "A" with J14 stanchion. Weight about 82 pounds per stall.

Stall 14C is frame "A," J14 stanchion and manger division. Weight about 100 pounds per stall.

Stall 14A is frame "A," J14 stanchion and complete manger. Weight about 115 pounds per stall. The T15, the TA15, the X18 or the XA18 stanchions may be substituted in place of the J14 stanchion in stalls 14B, 14C or 14A. The bull stall is frame "B" with TC15 stanchion. Weight about 110 pounds per stall.

Any of the James drinking cups can be attached to any of the above stalls.



FRAME STYLE "A"

(PATENTED)

UPRIGHTS and HORIZONTALS: Upright stall posts are of pipe $1\frac{3}{8}$ -inch outside diameter, thickness of pipe wall about .14 inch; horizontal is of the same material $1\frac{1}{2}$ x $1\frac{1}{2}$ -inch square, thickness of wall about .13-inch. Patent applied for.

FITTINGS: Best malleable. Size and strength sufficient to withstand all strain. Dust-proof type. (See page 110.)

ANCHORS: Heavy galvanized steel 2 inches wide; one furnished for each stall upright post. Anchors have templates attached to make accurate setting of anchors easy. Anchors are the only part of the stall required at the time concrete is laid, if frame "A" is used; the stall is easily attached to the anchors at any time later. (See page 118.)

PARTITIONS: The James triple curve stall partitions as described on page 111 made of pipe $1\frac{3}{8}$ -inch O. D., thickness of pipe wall about .14 inch.

WIDTH OF STALL: We carry in stock 3 feet 2 inches, 3 feet 4 inches and 3 feet 6 inches. 3 feet 6 inches width will be furnished if not otherwise specified.

SURE-STOP: The swinging sure-stop consists of a post of $1\frac{5}{16}$ -inch O. D. pipe with the opening at the top closed with dust-proof ornament; dust-proof hinge fittings are of best malleable; the rod connecting the row of sure-stops is $\frac{1}{2}$ -inch pipe, openings at ends closed with dust-proof ornaments. (See page 99.)

FINISH: The steel is first mechanically cleaned removing scale, grease and foreign matter, thoroughly preparing the material for painting; it is then finished with the best grade protective enamel, baked for two hours at a high temperature. (See page 125.)

MANGER PATTERN: Will be furnished free or on request; made of hardwood exact shape of manger partition bottom, that manger trough in the concrete may be so shaped that the James complete manger or the manger division, depending on pattern used, will fit accurately if you later wish to add the mangers to the stalls. See page 120. Be sure to specify the style of manger pattern wanted—pattern No. 1 for the complete manger and pattern No. 4 for the manger division. Pattern No. 4 will be sent with all steel stall orders unless No. 1 is specified.

Shipped assembled, knocked down for convenience in handling and ease of erection. (See page 119.)

FRAME STYLE "B"

Exactly the same as frame "A" excepting that the swinging sure-stop is omitted and two additional upright posts with anchors are furnished; stall cannot be furnished less than 4 feet in width, and 4-foot width will be furnished if not otherwise specified.

THE MANGER


MANGER DIVISIONS: (Patent applied for.) Heavy gauge galvanized sheet steel reinforced by $\frac{1}{4}$ x 1-inch iron. A strong heavy malleable hinge that will not slip holds division firmly in position. The U guard fitting around steel post holds division rigid. Regularly furnished 14 inches high. (See page 137.)

COMPLETE MANGER: Patented. The individual self-cleaning type. Constructed of heavy gauge best galvanized sheet steel; manger front and partition strongly reinforced by folding and compressed edges. U-shaped guards on partitions overlap the stall posts, and a V-shaped brace joins manger front and partitions, insuring rigidity and preventing racking. Bottom of partitions rounded. (See page 131.)

MANGER LIFTING SPRING: Patented. Special design of cold-drawn flat spring; oil-tempered and tested for severe use; same quality as the best automobile spring. Tension easily adjusted. Furnish four springs with five stalls. (See page 137.)



BULL STALL

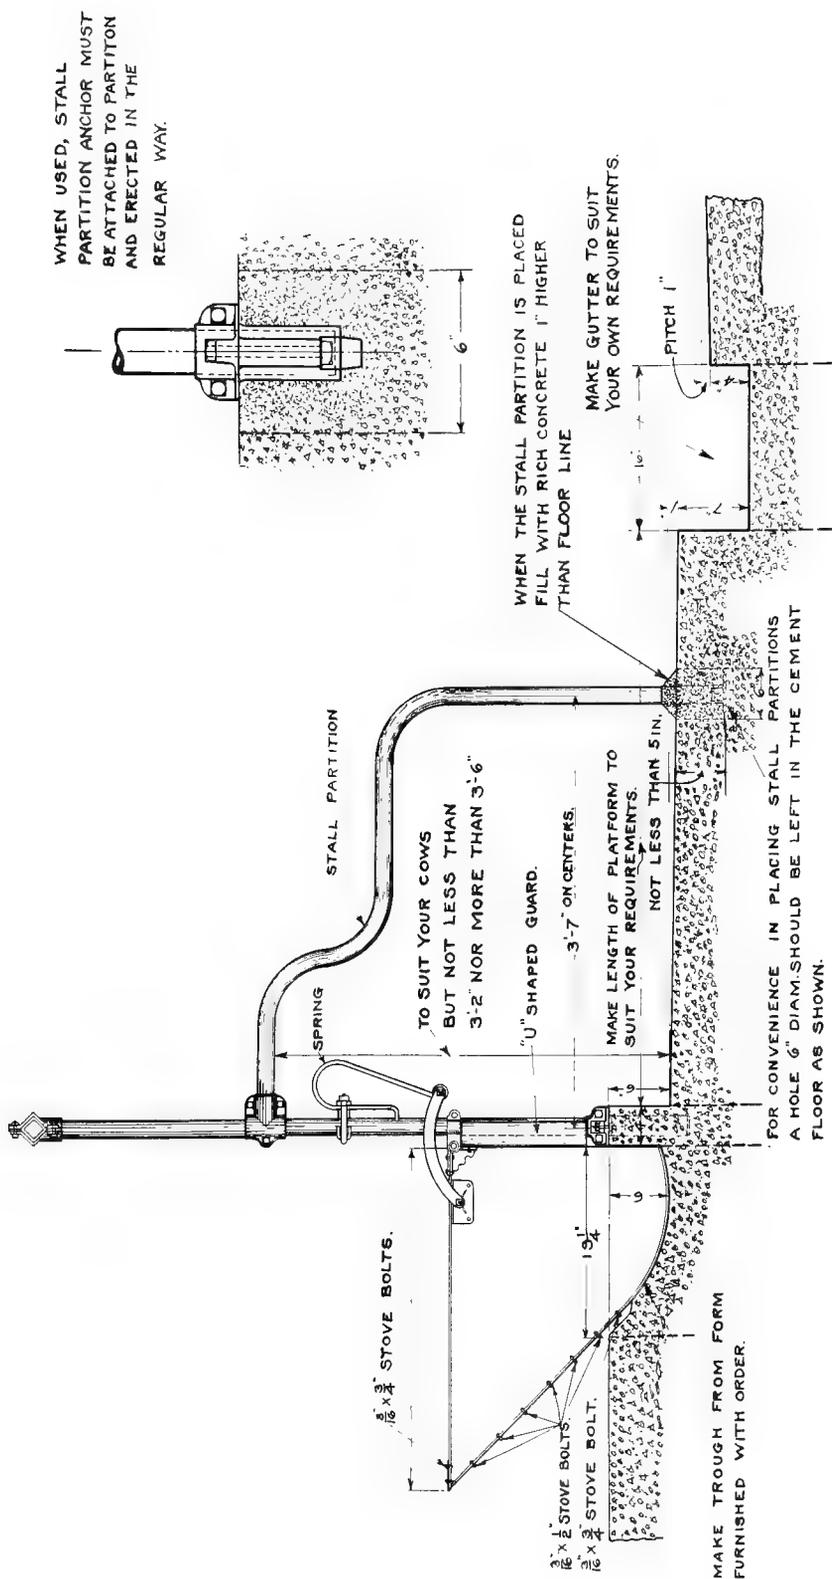

WHEN USED, STALL PARTITION ANCHOR MUST BE ATTACHED TO PARTITION AND ERECTED IN THE REGULAR WAY.


WHEN THE STALL PARTITION IS PLACED FILL WITH RICH CONCRETE 1" HIGHER THAN FLOOR LINE

MAKE GUTTER TO SUIT YOUR OWN REQUIREMENTS.

FOR CONVENIENCE IN PLACING STALL PARTITIONS A HOLE 6" DIAM. SHOULD BE LEFT IN THE CEMENT FLOOR AS SHOWN.


MAKE TROUGH FROM FORM FURNISHED WITH ORDER.

A specially prepared plan is supplied for use in connection with the erection of every equipment order. This plan embodies all the necessary measurements to be used. In addition to this plan we send a very complete book of printed instructions any dimensions you may desire to know in advance of the receipt of the erection plan and printed instructions can be obtained from the cut here shown.

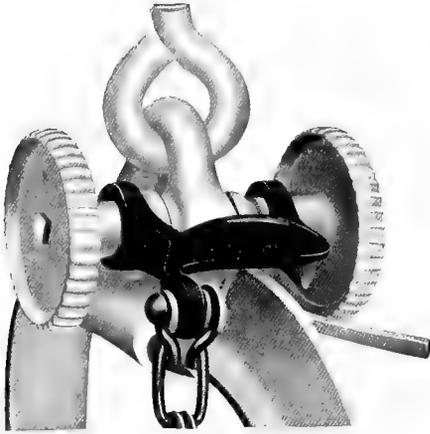

Cut A


Cuts A and B show Chain Guide as furnished for 14J Stanchions previously purchased.

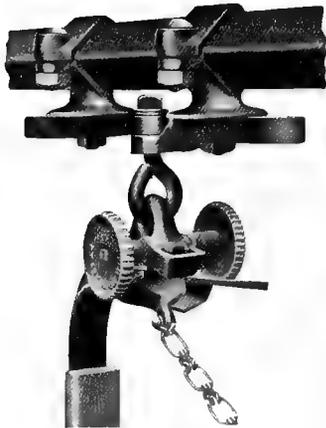

Showing
Clamp for
Steel Frame
No. 14J
Stanchion



Cut B

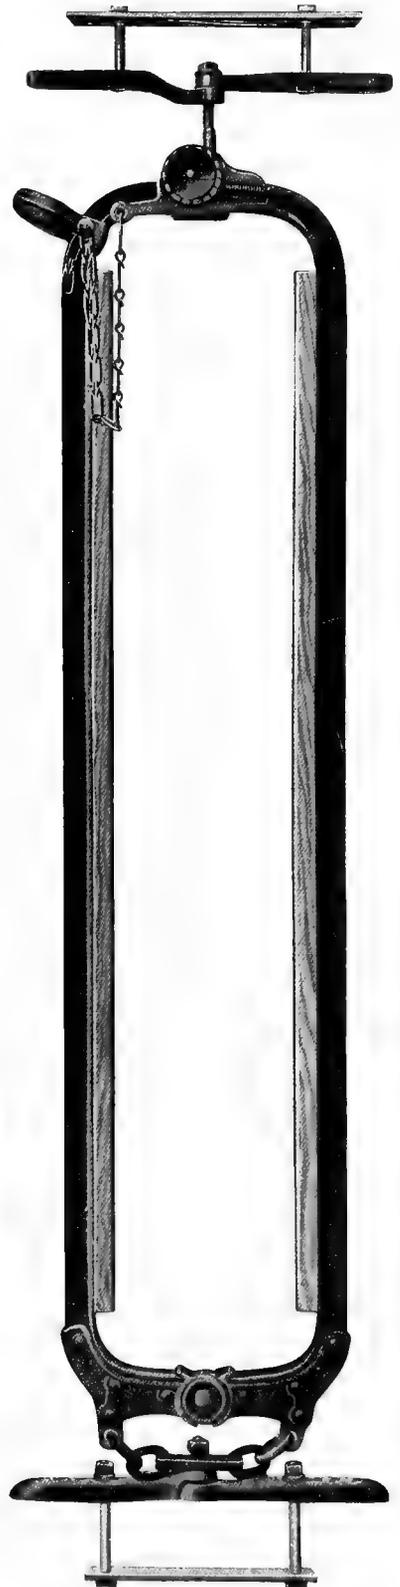

No. 14J

James Stanchion 14J

(PATENTED)

SPECIFICATIONS

ALIGNMENT DEVICE: Best malleable iron. Adjustment $10\frac{1}{2}$ in. (Page 115.)

CHAIN GUIDE: Relieves the strain from the loose arm and the hinge when pressure is thrown on this loose arm while not engaged in the stall post; limits the distance the stanchion opens, and takes strains off the hinge when the stanchion is not closed. This chain guide can easily be put on 14J stanchions previously purchased. (Cuts A, B.) It is an easy matter, by use of a punch and hammer, to remove the knobs of the locks, slip the chain fitting in place (see cut A, page 152) and put the knob back on again. A row of stanchions can be equipped with this chain guide in a surprisingly short time, without removing the stanchion from the stall. (See page 152.)

DOUBLE CHAIN HANGER: Seven links, three flat steel and four round, attached to stanchion with $\frac{5}{16}$ -in. rivets, to alignment irons with $\frac{1}{2}$ -in. machine bolt. Page 105.)

WASHER PLATES: Two plates furnished, one for top and one for bottom, with four carriage bolts for 2 in. x 4 in. frame $\frac{7}{16}$ in. x 3 in., with lock washers. Longer bolts extra.

HINGE: Two-piece, interlocking hinge of best malleable; diameter $2\frac{1}{8}$ in., giving a wide bearing surface; attached with six $\frac{1}{4}$ -in. rivets; rivet in center of hinge $\frac{7}{16}$ -in. (See page 107.)

SIDE BARS: Carbon steel tees $1\frac{1}{4}$ in. x $1\frac{1}{4}$ in. x $\frac{3}{16}$ in. All bends and holes made by special machinery, insuring uniformity and perfect working fit of hinge and lock.

WOOD LINING: Thoroughly seasoned birch, carefully milled, shaped, polished and oiled. Carefully fitted to tees and securely attached. (See page 105.)

LOCK OPEN CLIP: Malleable iron attached with $\frac{5}{16}$ -in. carriage bolt. (Page 101.)



COW PROOF LOCK: Of malleable and steel. Door knob type; can not be opened by the cow—but can be opened easily as a door even when the cow is pulling back. Best quality coiled spring $\frac{1}{2}$ -in. diameter. Will not break or lose its tension. Locks automatically when stanchion is closed. (See page 109.)

NECK SPACE: 7 in. regularly furnished. Neck space may be made 6 in. to $7\frac{1}{2}$ in. by the use of thicker or thinner linings.

RIVETING: Huge presses, fifty tons pressure, form the rivet heads to shape, without crystallizing the metal—rivet heads will never break off.

FINISH: The steel is first mechanically cleaned, removing scale, grease and foreign matter, thoroughly preparing the material for painting; it is then finished with the best gray protective enamel, baked for two hours at a high temperature. (See page 125.)

WEIGHT: Approximately 27 pounds.

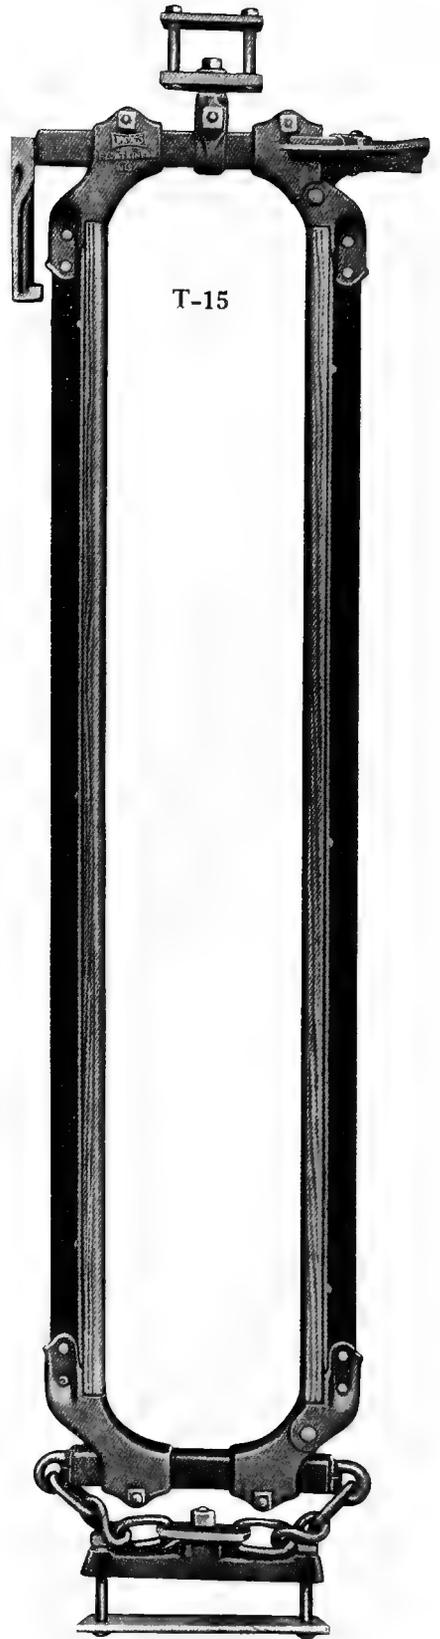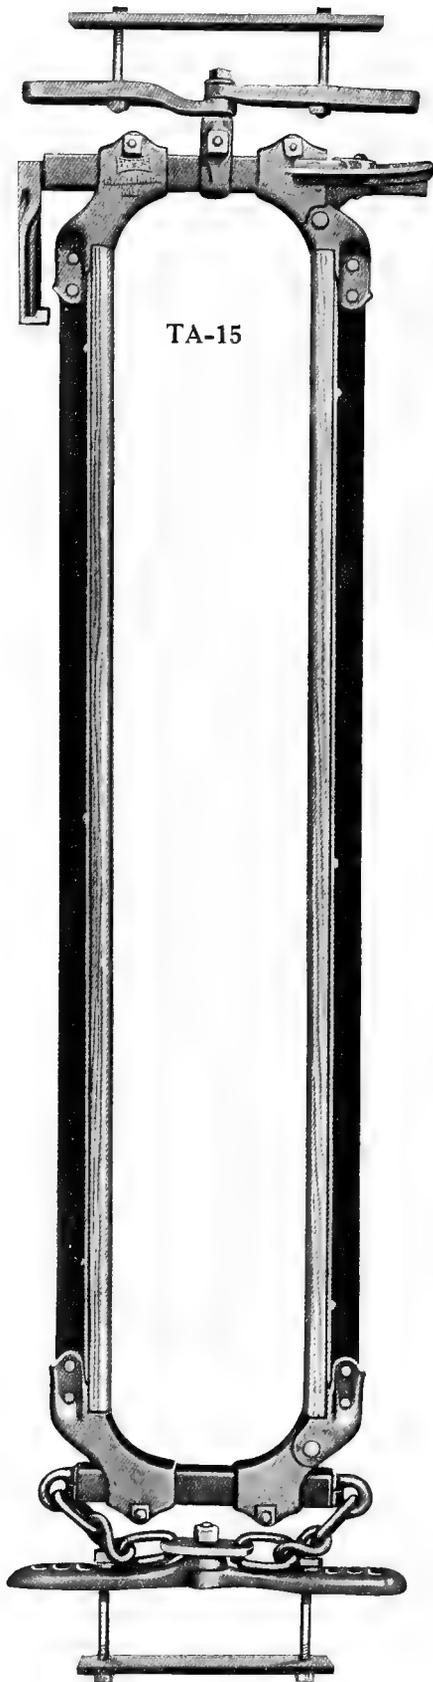

James Stanchion TA15

(PATENTED)

SPECIFICATIONS

ALIGNMENT DEVICE: Best malleable iron. Adjustment $10\frac{1}{2}$ in. (See page 115.)

DOUBLE CHAIN HANGER: Seven links, one flat steel and six round. Attached to stanchion with malleable castings, and to the aligning irons with $\frac{1}{2}$ -in. machine bolts. (Page 105.)

WASHER PLATE: Two plates furnished; one for top and one for the bottom, with four carriage bolts for 2 in. x 4 in. frame $\frac{7}{16}$ in. x 3 in., with lock washers. Longer bolts extra.

HINGE: Is in lower right hand corner; is extra strong, and has no openings to catch dirt.

SIDE BARS: Carbon steel tees, $1\frac{1}{4}$ in. x $1\frac{1}{4}$ in. x $\frac{3}{16}$ in. All holes made by special machinery, insuring uniformity and perfect working fit of hinge and lock.

WOOD LINING: Thoroughly seasoned birch, carefully milled, shaped, polished and oiled. Carefully fitted to tees and securely attached. (See page 105.)

LOCK OPEN DEVICE: Is formed by the handles of the lock. Lock open pipe may be moved on the horizontal to conform to width of the stall; for this reason no fitting is furnished to attach lock open pipe to stall post.

COW PROOF LOCK: Of malleable. Absolutely cow proof. Easy to open with the hand; locks automatically when stanchion is closed.

NECK SPACE: Adjustable from 5 in. to 9 in. Adjustment can be easily and quickly made, requiring only the loosening of two nuts at the top and two at the bottom.

RIVETING: Huge presses, 50 tons pressure, form the rivet heads to shape, without crystallizing the metal. Rivet heads will never break off.

FINISH: The steel is first mechanically cleaned, removing scale, grease and foreign matter, thoroughly preparing the material for painting; it is then finished with the best gray protective enamel, baked for two hours at a high temperature. (See page 125.)

WEIGHT: Approximately 30 lbs.

James Stanchion T15

(PATENTED)

Identically the same as Stanchion No. TA15, excepting that the alignment irons are omitted.

Weight: Approximately 23 lbs.


James Stanchion TC15

(PATENTED)


Identically the same as Stanchion No. TA15, excepting that the side bars are $1\frac{1}{2}$ in. x $1\frac{1}{2}$ in. x $\frac{3}{16}$ in.

Weight: Approximately 33 lbs.

Neck Space: Adjustable from 5 to 10 inches.

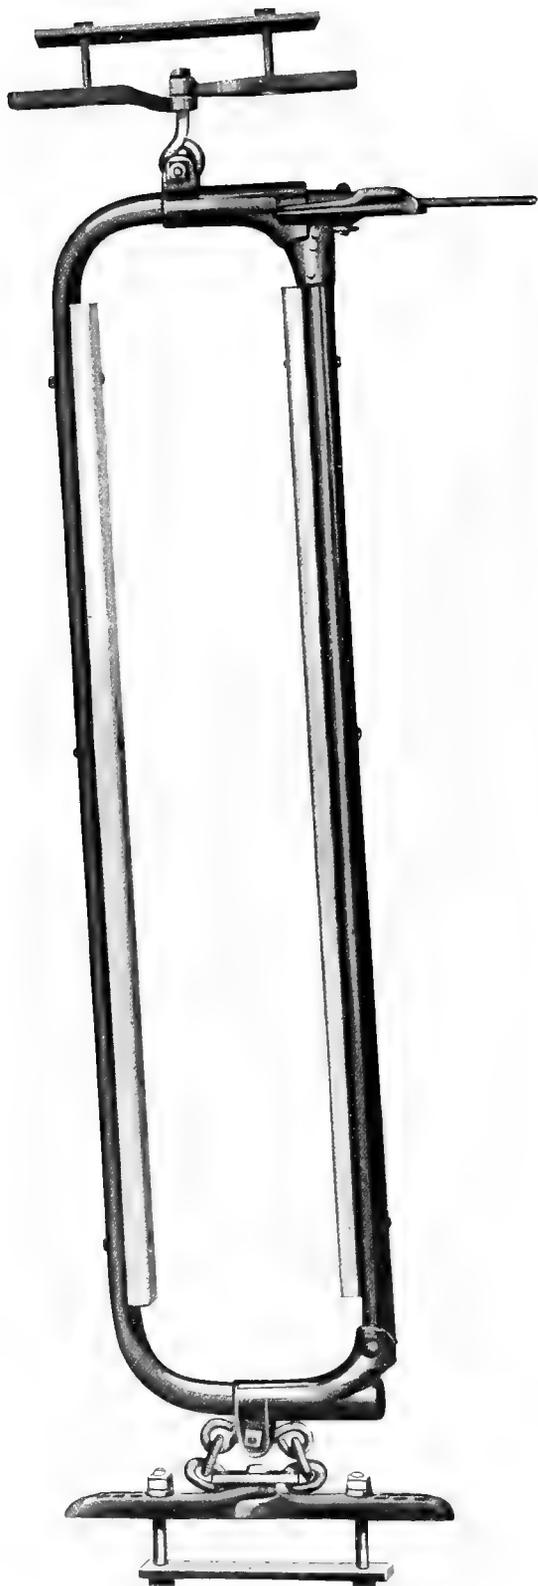

XA18 Stanchion

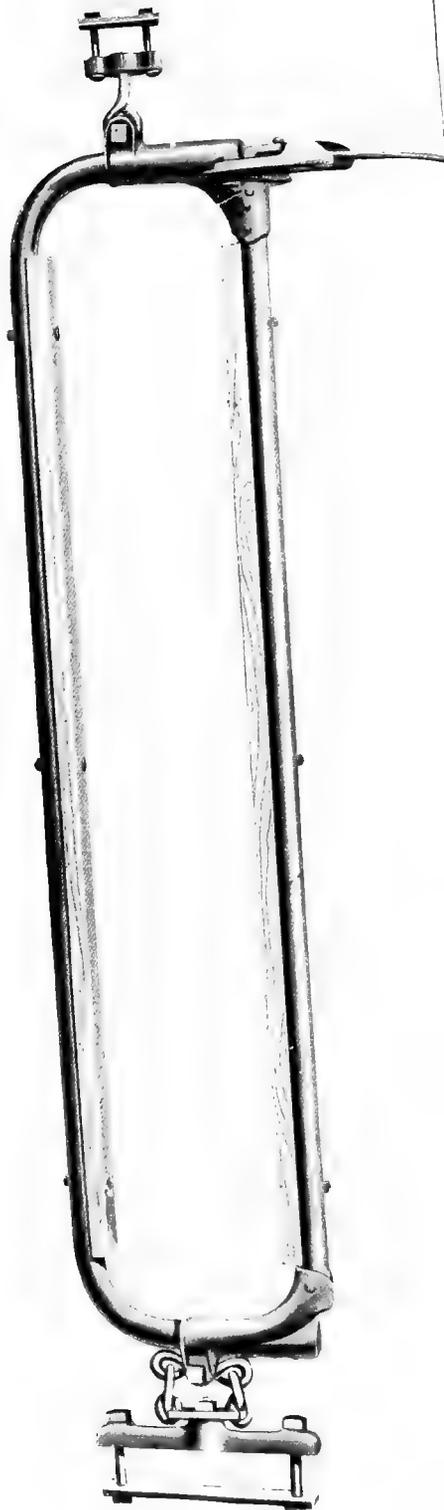

X18 Stanchion

James Stanchions—Nos. X18 and XA18

(PATENT APPLIED FOR)

SPECIFICATIONS

No. XA18

ALIGNMENT DEVICE: Best malleable iron. Adjustment $10\frac{1}{2}$ inches. (Page 115.)

SIDE BARS: Made from $1\frac{5}{16}$ -inch O. D. steel pipe.

WOOD LININGS: Of $\frac{5}{8}$ x $1\frac{3}{8}$ -inch thoroughly seasoned birch, carefully shaped, polished and oiled. Fastened to side arms by six $\frac{1}{4}$ x $2\frac{1}{8}$ -inch finhead bolts, which form no projections for the cow's neck to rub against.

NECK SPACE: Adjustable from 6 inches to $8\frac{1}{2}$ inches. The stanchion neck space top and bottom adjusters are best malleable iron.

CHAIN HANGER: Six links, four round, one flat and one special double-eye link. Attached to alignment irons with $\frac{1}{2}$ -inch machine bolts.

Two plates furnished; one for top and one for bottom, with four carriage bolts for 2 x 4-inch frame, bolts $\frac{7}{16}$ x 3-inch, with lock washers. Longer bolts extra.

STEEL GUIDE: Relieves the strain from the loose arm and the hinge, when pressure is thrown on this loose arm while not engaged on the stall post; limits the distance the stanchion opens.

LOCK OPEN CLIP: Malleable iron. Attached with $\frac{5}{16}$ -inch bolts.

COW-PROOF LOCK.

FINISH: The steel is first mechanically cleaned, removing scale, grease and foreign matter, thoroughly preparing the material for painting; it is then finished with the best gray protective enamel, baked for two hours at a high temperature. (See page 125.)


WEIGHT: Approximately 27 lbs.

James Stanchion No. X18

(PATENTED)

Identically the same as XA18, excepting that the alignment device is omitted.

WEIGHT: Approximately 25 pounds.

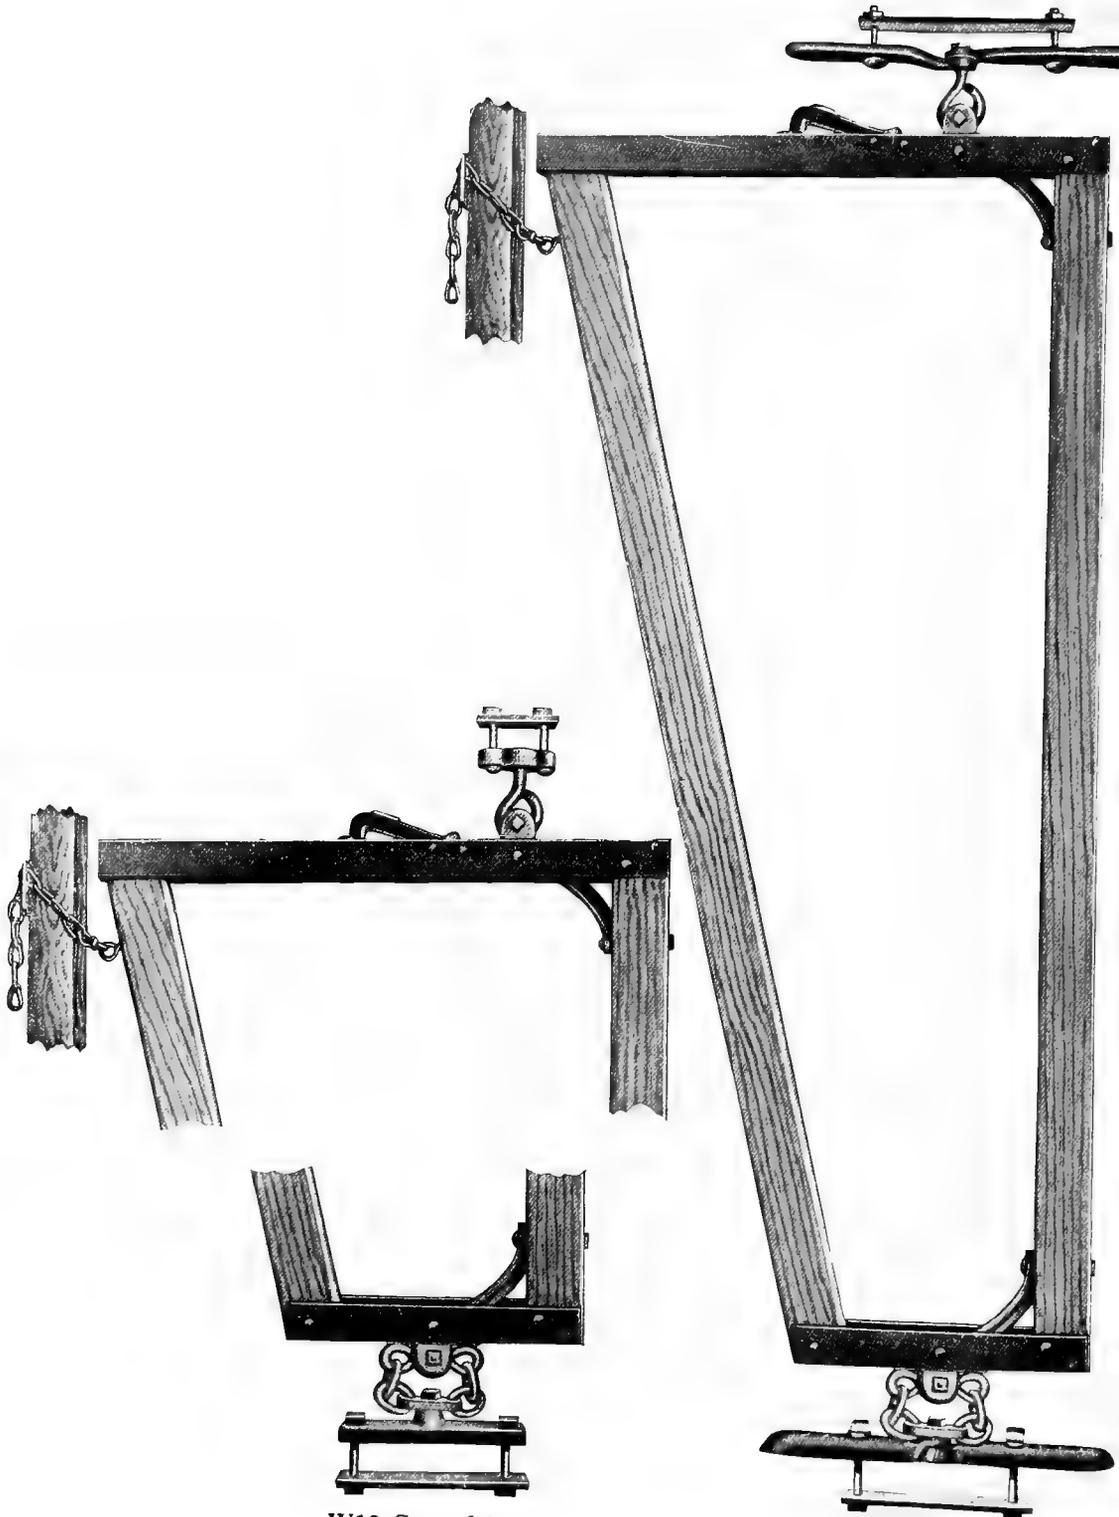

W18 Stanchion

WA18 Stanchion

James Stanchion WA18

(PATENTED)

SPECIFICATIONS

ALIGNMENT DEVICE: Best malleable iron. Adjustment $10\frac{1}{2}$ inches. (See page 115.)

CHAIN HANGER: Six links, 1 flat, 4 round and 1 special double-eye link. Top fastener is $\frac{1}{2}$ -inch round steel eye.

WASHER PLATES: Two plates furnished; one for top and one for the bottom, with four carriage bolts for 2 x 4-inch frame $\frac{7}{16}$ x 3-inch, with lock washers. Longer bolts extra.

SIDE BARS: Of well seasoned hard maple $2\frac{1}{2}$ x $1\frac{1}{2}$ inches, carefully milled, shaped, polished and oiled. Ends riveted crosswise, to prevent splitting. Fastened to top and bottom plates with rivets. Reinforced by heavy malleable braces, riveted to the stick and riveted to the steel plates; no racking in the corners, the strain being equally distributed.

TOP AND BOTTOM PLATES: Heavy carbon steel 2 inches wide and a trifle over $\frac{1}{8}$ -inch thick, carefully punched by special machinery, insuring perfect fit for all rivets. A steel plate at the top forms a guide for the loose arm of the stanchion and prevents it from dropping to the floor.

COW-PROOF LOCK: Malleable iron. Simple, cannot get out of order. Easily unlocked with gloved or mittened hand, but cannot be opened by the cow. Locks automatically when stanchion is closed.

NECK SPACE: $7\frac{1}{2}$ inches.

LOCK OPEN CHAIN: James Chain Lock Open Device and Clip, as shown in illustration.

RIVETING: Machine riveted.

FINISH: The steel is first mechanically cleaned, removing scale, grease, and foreign matter, thoroughly preparing the material for painting; it is then finished with the best gray protective enamel, baked for two hours at a high temperature. (See page 125.)


WEIGHT: Approximately 22 pounds.

James Stanchion W18

(PATENTED)


Identically the same as Stanchion WA18, excepting that the alignment irons are omitted.

WEIGHT: Approximately 15 pounds.

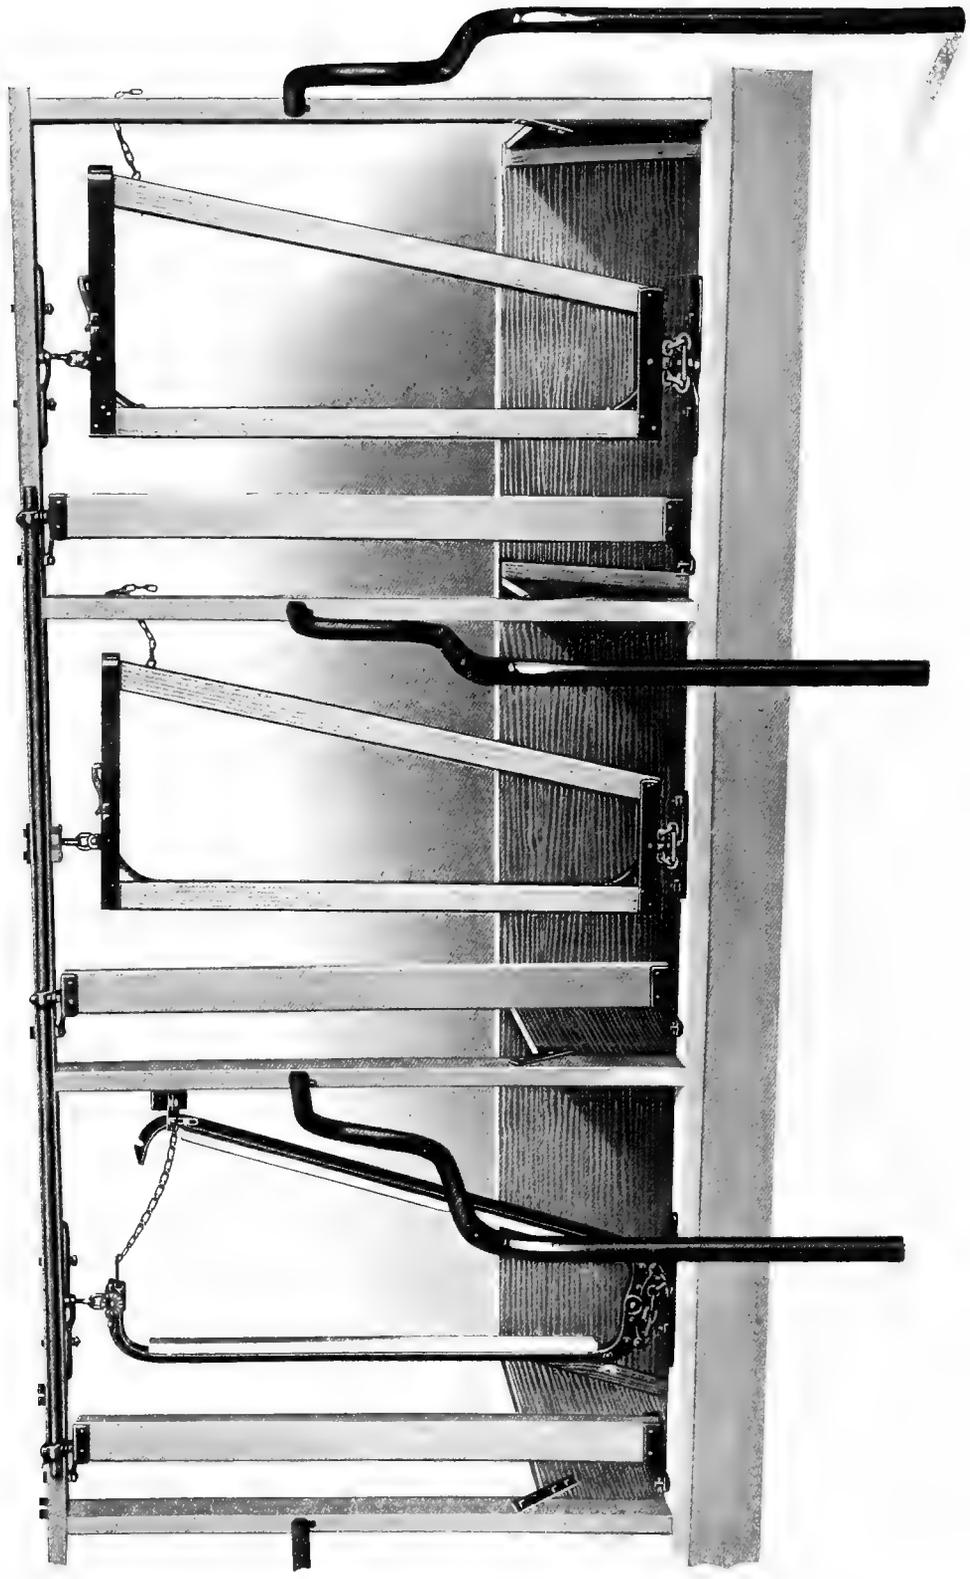

James Wood Stalls, with Stanchions J14, W18 and WA18 respectively. Without James Anchor.

James Drinking Cups



THE three elements for maintaining life and the principal elements necessary to the cow for milk production are food, air and water.

Thousands of experiments and years of study by many men have been devoted to the relation of feeding to milk production; and the principles of feeding are now quite well established.

The importance of plenty of pure air and how to secure it in the dairy barn is also understood.

But it is only very recently that the dairy industry has begun to realize the great benefit and profit that follow the adoption of better methods of watering the dairy herd.

Indeed, this subject is so new that but comparatively few have any understanding whatever of the great possibilities of increasing dairy profits through the saving of labor, the saving of feed, the larger milk yields, the better cow health, the prevention of the spread of diseases and the better growth of young stock through the use of the James watering method.

Turn Water Into Milk

Milk is 87 per cent water.

To make milk, cows must have water just as they must have feed.

To make maximum yields of milk, cows must have all the water they want, whenever they want it, day and night.

In most herds, the cows are making too little milk because they drink too little water.

The average yield in the principal dairy States is two or three pounds, per cow, per day less than it should be—and less than it would be if they were properly watered.

That means three and one-half billion pounds of milk the same as wasted, during the six months the cows are in the barn.

Thousands of dairy farmers are throwing away a good daily profit simply because they don't realize that plain water is just as much a milk maker as silage or a balanced ration.

Dairymen are throwing away from \$4 to \$12 clean profit per cow during the housed-in season, because the cows don't get enough water, don't get it when they need it, and because what they do get is too cold.

The average dairy cow drinks 15 to 18 gallons of water daily and high-producing cows drink much more. It is recorded that one famous dairy cow giving 700 pounds of milk a week drank nearly a barrel of water a day, which is about three and one-half pounds of water for each pound of milk produced.

The importance of sufficient water drinking to insure maximum milk yield cannot be over estimated; but the average dairyman has no conception of the extent to which a cow's milk production does depend upon the amount of water she consumes, and the important part water plays in converting the milk-making elements of feed into milk.

But a cow is not a camel—you can't water her like one without cutting down her milk production.

She hasn't the ability to store water until she needs it for digestion of food. She drinks just as much as she needs when she is drinking. You can't put her at an icy trough and make her drink to supply her future needs.



You might as well cut down on your feed as to fail to provide your cows with all the water they want exactly when they want it—not hours after they want it—not the next morning, but exactly when digestion demands it. A cow to produce the best results never should be allowed to get thirsty. The water should be before her where she can drink whenever she wants it, as much or as little as she wants, day or night.

The cow that is turned out to drink in the trough in the yard once or twice a day, is thirsty most of the time, which means that her digestion is demanding water to digest food—to make milk—a little water at a time, an exact amount of water for every pound of food that enters her stomach. Not having the water when she needs it, she makes less milk.

The reason she drinks so heartily at the trough, when she does, is because she has been thirsty so long—but the water she drinks then is of no use in digesting the food taken into her stomach during the thirsty spell. Her digestion has done the best it could without water and the milk-making elements which have been wasted for lack of water is pure loss—a loss of one to two pounds per cow, or more, per day.

And the thirsty cow turned out to water—how often we see her shivering through a cold unsatisfying drink of icy tank water, either drinking too little because the water is icy cold, or because of the great thirst drinking so much ice water that she must use expensive feed to warm herself again. Turning feed into heat which, under proper conditions, would have gone to the making of milk.

James Drinking Cups Will Stop the Winter Slump in Your Milk Yield

To correct methods of feeding and breeding, James drinking cups hitch up the correct method of watering. By establishing nature's normal balance between the feed consumed and the water drunk, James drinking cups insure a healthful, vigorous functioning of the cow's milk-making organism—and bigger milk yields follow as a matter of course.

Cold weather thirst—the great thief of the winter milk pail—vanishes completely when James drinking cups are installed.

When your herd is watered the James Way, each of your cows can drink whenever she likes, as much as she likes, at the temperature of water that is most satisfactory, at any minute of the day or night.

Instead of being herded out twice a day to shiver through an unsatisfying drink of ice water, your cows drink to their hearts' content right in the warm security and contentment of their stalls any time that their thirst prompts them to do so.

There is no more going thirsty three quarters of the time—no more herding the cows out to drink and herding them in again—no more frozen tanks to chop open—no more tank heater annoyances or fuel expense—no more spreading of disease among the herd through the unsanitary method of all cows nosing the same water—no more twice-a-day periods of cold and excitement to disturb your herd and interfere with their milk production—and no more of that day-after-day, body-freezing, wind-biting winter chore to worry about in watering your herd.

James drinking cups put an end to all this, once and for good.

BELL ATRINSON



James Drinking Cups Prevent Spread of Disease, and Insure a Big Saving of Labor in the Daily Winter Chores

Even if increased milk production were the only advantage offered by James drinking cups, this one feature alone would make them a paying investment.

But when you stop to consider the other features—the big saving in labor—the improvement effected in the general condition of the herd, the increased health and vigor resulting from the large additional amount of refreshing water consumed, the prevention of contagion among the herd, the saving of tank heater fuel and bother, you are bound to admit that a James drinking cup outfit is worth considering, and considering well.

Just think of never having to brace out into the bitter cold any more to turn your herd out to drink, of never again having to face, day after day, all winter long that cold twice-a-day job of watering your cows at the icy tank—of no longer having to chop open the frozen tank—of never having to bother about keeping the fire going in the tank heater, or paying for tank heater fuel.

And just think, too, what it will mean to you to know that any time a cow in your herd should become diseased, there is no chance for that cow to give the disease to the rest of the herd through the drinking water before the disease is discovered and the affected animal isolated.

James drinking cups prevent the spread of disease in the herd for the simple reason that where these cups are used, no two cows ever nose the same water. Each cow has her individual cup to drink from, and each cup is fitted with a special valve which allows the fresh water to enter but prevents the water, once in the cup, from flowing back and mixing with the general supply. There is no flowing of water from cup to cup and it is, therefore, impossible for a healthy cow to come into contact with water that has been touched by a diseased cow.

The vital importance of this feature of James drinking cups will be readily appreciated when it is remembered that about 10 per cent of the dairy cattle in this country are affected with tuberculosis. In Bulletin No. 175 issued by the U. S. Department of Agriculture, the increasing prevalence of tuberculosis among cattle and the vital necessity of adopting measures of suppression and control are pointed out as the greatest problem confronting the live stock industry today.

The Bulletin goes on to say that “one reason why tuberculosis is so common among cattle is that many cattle pass tuberculosis germs from their bodies before anyone knows or suspects that they have tuberculosis and can give the disease to others.” That a cow may be apparently healthy when purchased and still develop the germs of tuberculosis which may develop and spread to other cattle is asserted. Referring to preventative measures the Bulletin asserts “the feeding and watering must be done with separate utensils.”

There are, of course, other ways of passing tuberculosis germs, but certainly the common tank from which all cows drink is a dangerous source of infection. You can guard your herd from spread of disease through the water supply, by the use of the James drinking cups.

Figure this Drinking Cup Proposition Out for Yourself

The experience of practical dairy farmers told in the letters on following pages, show that an increase of 2 pounds per cow per day is a conservative estimate of the result of James drinking cups. With your cows in the barn 200 days of the year, the



Dairy Barn
University of Wisconsin
Equipped the James W
the James W

increase in milk yield would be 400 pounds per cow which at present prices would mean at least \$8 or \$10 per cow.

Suppose you have 25 cows in your herd—this would mean an increase of \$200 to \$250 in your winter dairy profit from the increased milk yield alone.

Add to this the saving in labor, the saving in tank heater fuel, and the saving of labor in tending the heater, the saving by preventing spread of disease through the drinking water, and the value of the general increase in efficiency and all around health and vitality of the herd.

Think this over carefully and you will quickly realize the truth of the statement that the James drinking cups more than pay back the initial cost, the first season they are used. And there is practically no expense of upkeep.

What happens when cows are given all the water they want, whenever they want it, day and night, by means of the James drinking cups is told in the following experiences of dairy farmers. Read every word of these letters for they are convincing proof of every statement we have made.

These letters will make clear to you how you can increase your profits by this very simple means of turning water, which costs you practically nothing, into milk.

How Drinking Cups Make More Milk

3 LBS. EACH DAILY

L. S. Duggan, Gainesville, N. Y., January 18, 1918:

I handed your letter to my tenant for reply and he says:

"The James drinking cups did increase the milk yield, due in my opinion to their use, 30 pounds a day for ten cows. This is not an estimate, but is shown by the records. The buckets also save one hour a day compared with watering the cows from a water tank in the yard."

4 POUNDS MORE PER COW

"Chehalis District, Washington:—Six herds were tuberculin tested during the month. One man installed individual drinking fountains and the daily milk flow was immediately increased nearly 4 pounds per animal."—Hoards Dairyman, Feb. 22, 1918. Reports of Cow Testing Association.

160 LBS. MORE MILK THE SECOND DAY— $3\frac{1}{3}$ LBS. PER COW TOTAL INCREASE—AND PREVENTS SPREAD OF DISEASE

F. W. Merrill, Manager of McCanna's Edgewood Stock Farm, Burlington, Wisconsin, writes November 9th, 1917:

"We received about 160 pounds more milk the second day after the James cups were installed. The cows were on the same feed and other conditions were exactly as they had been previously. We received about 100 pounds more milk during the next two or three days. This increase was from a herd of 75 cows.

There is no question in my mind but what the installation of the James water cups will not only increase the flow of milk, but will preserve the health of the herd. We had just taken out an old style water cup which allowed one cow to drink water from the other cups, and anyone who has had any experience, will readily appreciate that should there be one cow in the herd tubercular, she might spread the disease throughout the entire herd through such drinking cups."

75 LBS. INCREASE— $18\frac{3}{4}$ % DAILY

A. H. Bluemke, Rosendale, Wis.:

"As a result of using James watering buckets, we have an increase of 75 pounds on a 400-pound milk yield, shown by the records at the factory. Also we find that the drinking cups save us 30 minutes each day. This in comparison with watering the cows from a water tank in the barn."


2 LBS. MILK PER COW INCREASE—"40 QUARTS DAILY"

L. W. Butterfield, Binghamton, N. Y., says:


"Our milk yield increased after starting to use the James drinking cups, due in our opinion to their use, about 40 quarts. This is not an estimate but is the increase shown by milk records. Formerly we watered our cows from a tank in the yard." Mr. Butterfield has drinking cups for 44 cows. This gives an average increase of almost one quart or approximately 2 pounds, per cow, per day."



A

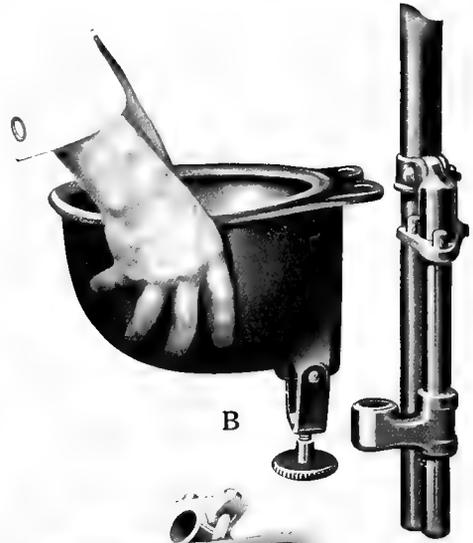


B

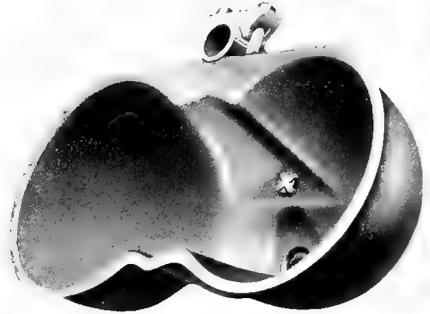

James
Drinking
Cup
Type 4

(See page 172)

Easily Removed,
Quickly Cleaned
See Wash Tank page 178

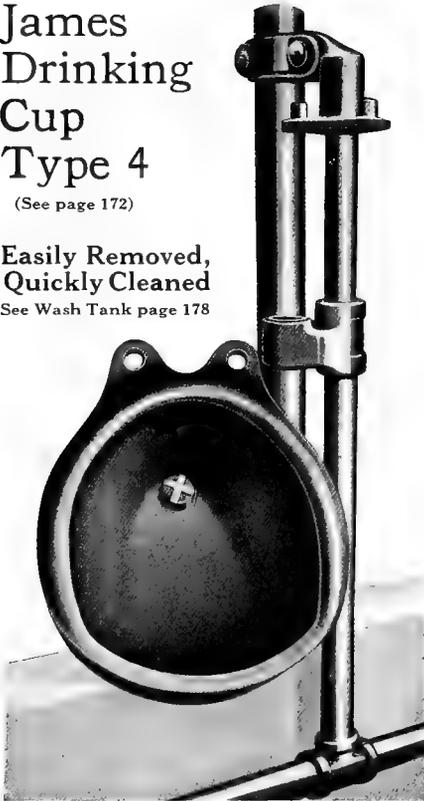

James Two-Cow Cup
Type 5. Gravity System



ONE QUART A DAY MORE PER COW

O. D. Sheldon, Barre Plains, Mass.

"I know from experience that I get one quart a day more from every cow with water buckets than without them. If I had to turn my herd of 41 cattle out to water every day, I would not keep a cow. It takes too much extra help and time and cattle are better off in the stable in all kinds of weather. It is surprising how much more water they will drink and how often, when they have it where they can get at it any time they want it."

COWS DRINK 50% MORE WATER—AND GIVE 10 to 20 LBS. MORE BUTTERFAT A YEAR

L. P. Zimmerman, Waseca, Minnesota, October 9, 1917:

"I believe it my duty to tell you briefly the value I attach to James cups for watering cows. I never used a tank heater and never watered outside in winter, as I used a watering manger before I put in water cups. I have always been particular never to give my cows freezing water. The great advantage of drinking cups over a water manger is that you are sure every cow has all the water she wants all the time.

With the old manger system I pumped on an average of one hour per day in winter. With the cups I pump 1 1/2 hours a day to supply about the same amount of stock, using the same pump and engine. Hence, I figure the extra one-half hour's pumping represents the extra water 30 head of stock drink by having all the water they want all the time. All this watering is now done automatically. Anyone who has done it can tell you it is quite a job to keep a manger in fit shape for an animal to drink from.

I have cow test records of a cow testing association for several years, and while it is hard to say that such and such a difference is due to any one thing, I feel that 10 to 20 lbs. of butterfat a year is conservative as an increase due to better watering."

MORE MILK THAN EVER BEFORE

J. B. Cain, Glen Beulah, Wis., March 5, 1917:

I am getting more milk now than ever before from the same number of cows and attend to them in about three hours less time per day, owing to the convenience of the barn. I feel safe to say James drinking cups will more than pay for themselves in one year's time in additional amount of milk, *say nothing about the time saved.*

INCREASE OF 160 LBS. MILK DAILY

J. P. Tuck, Supt., Jelke Dairy Farm, Dundee, Ill., Oct. 15, 1917:

"I would not try to make milk without James drinking cups, as I know that last winter our cows averaged over 2 lbs. of milk each per day better than when we watered twice a day in the feed trough, because the cows can drink whenever they want to. You can go in our barn any time during the day or night and you will always find some cows drinking.

I feel safe to say that our cows paid in full for the cost of installing the drinking cups for our 80-cow barn with the extra milk I got during the first two months after we installed the drinking cups.

Furthermore, I may say that we watered our cows for some time from a large tank in the cow yard. This tank was heated by a tank stove; on cold days some of the cows would not even take a drink unless we drove them up to the tank. Of course, we did not make near so much milk as we do since the drinking cups are in."

"A MARKED INCREASE IN MILK"

Robert G. Morey, Genesee, Wis., March 1, 1917:

"We had the opportunity of testing the increased flow of milk gained by the installation of James individual water cups and found that they made a marked increase over the former way of watering the cows at regular intervals. We believe a cow, like a human being, wants to be privileged to drink water when she feels like it."

25 COWS—40 LBS. MORE MILK THE FIRST DAY

Wm. T. Field, Civil Engineer, Watertown, N. Y., Dec. 19, 1916:

"Mr. D. H. Rogers of Antwerp, N. Y., who recently installed James barn equipment, is very much pleased with his selection. His stock shows improvement and partly due to the installation of the James watering system his daily supply has steadily increased, although all the cows but one in his dairy are strippers. The first day after the installation of the complete outfit, with approximately 25 head, his milk increased 40 pounds."

INCREASES MILK FLOW

Emil H. Mehne, Almond, Wis., February 23, 1917:

"I like my barn very much, especially the James watering system. It certainly *saves fuel and labor* and also increases the milk flow."

25% MORE MILK

W. H. Mathei, Agricultural Advisor for Florence Farm, Florence, Wis., Feb. 20, 1917: "James Dairy Barn Equipment has without a doubt a great influence on the cows and their milk flow, which increased rapidly and steadily. The milk yield increased about 25 per cent and is still increasing, which I think is mostly due to the James individual water buckets, which furnish the cows with slightly warmed water."

Mr. Mathei, writing in the October 1917 magazine "System on the Farm," says: "In order to find out just what these labor-saving devices meant to us in terms of dollars and cents, 20 cows were kept under constant supervision. They were placed first in an old barn, then transferred to the one which was newly equipped. Here are the figures on the amounts of milk obtained under both conditions:



Illustration 1



Illustration 2

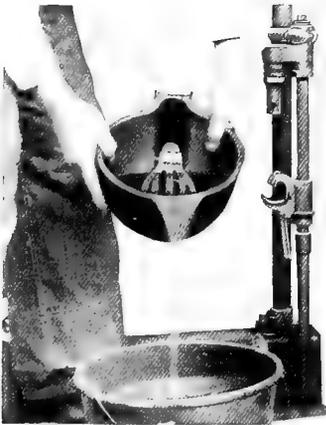


Illustration 3



Illustration 4



Illustration 5

James Drinking Cup Type 3

(See page 176)

Easily Removed,
Quickly Cleaned.
See wash tank on
page 178.

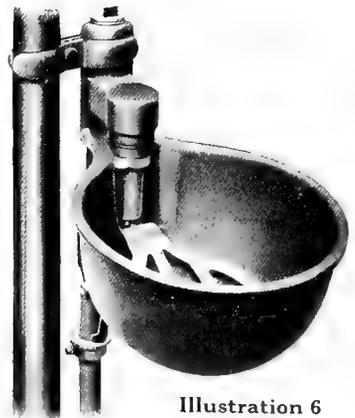


Illustration 6

In the old barn the average pounds of milk per head per week was, for seven weeks, respectively: 95.9, 80.4, 85.3, 80.1, 94.5, 89.8—an average weekly yield of 87.96 pounds.

The cows were then installed in the remodeled barn and the average pounds of milk per head rose as follows: First week 84.8 pounds, then four weeks following respectively 106.7, 116.7, 116.1, 108.5, an average for the five weeks of 106.56 pounds, or an average for the final four weeks of 112 pounds.

Comparing the average of the last four weeks, with the average of the seven weeks in the old barn, shows an increase of 3.43 pounds per cow, per day.

Mr. Mathei also states that the cows were fed in both barns the same rations of seven pounds of grain food per pound of butterfat and 30 pounds of silage, with 10 pounds of hay per 1,000 pounds of live weight.

The equipment in the new barn which he mentions, is "James."

ONE TO TWO POUNDS INCREASE—ONE HOUR LESS WORK

Chas. Hoffman, Denmark, Wis., December 20, 1917, writes: "I have no records to show the increase of milk yield after starting to use water buckets. But my estimate is from one to two pounds a day from each cow.

"I know through experience that a cow watered in the barn during the day and again at night will give more milk than one watered outside only.

"The water buckets save me at least one hour a day. My cattle were watered from a tank outside and didn't use a heater, and it was poor business, too. I am well satisfied with the buckets and will also tell you that the cows drink just as much water during night as in the day time."

ONE TO THREE POUNDS INCREASE

N. J. Jacque, Port Washington, Wis., under date of December 26, 1917, writes: "When I put in water buckets my milk increased per cow from one to three pounds a day. I was weighing the milk from every cow and gave the same feed as before.

"I save about every day one half to three quarters of an hour with the water bucket. Before I had the water buckets they got their water at the tank in the yard and was fresh pumped from the well."

MILK INCREASE PAYS FOR CUPS IN THREE MONTHS' TIME

A. F. Dale, Lockport, N. Y., December 19, 1917, writes: "My milk yield increased after starting to use James drinking cups due in my opinion to their use, enough to pay for them in three months' time. Also, they save me one and a half hours a day. I used to water from a tank in the yard, but did not warm the water."

INCREASE 20 POUNDS WEEK PER COW

Harry K. Jarvis, Weedsport, N. Y., December 24, 1917, writes: "I find that since putting in the James drinking cups due in my opinion to their use, my cows have increased about 20 pounds per week per cow. These figures are an estimate but are accurate, as the increase is shown by more cans of milk."

James Watering System is Simple

The James watering system is simple, requiring for the gravity system only the cups; the control tank with regulating valve to maintain a uniform level of water in the cups; a source (such as a supply tank or spring on a level higher than the regulating tank) from which the regulating tank may draw the water; and the necessary piping to connect the same. It is easily installed, and once in requires practically no attention—and the cows have pure, fresh water before them every moment of the day and night.


The level of the water in the cups is regulated by the level of the water in the regulating tank, these levels, of course, being the same. The level of the water in the regulating tank is maintained by a float valve; this regulating tank taking its water from any source having a sufficiently high level to feed regularly.

With the pressure system no regulating tank is required.

The James Drinking Cups

There are four styles of James drinking cups, a one-cow cup and a two-cow cup for the gravity system and a one-cow cup and a two-cow cup for the pressure system.

One of the best features of these cups is that they are so simple in construction and operation as to be practically trouble proof. They are so easy to install that any dairyman can equip his barn quickly and easily. And being automatic in action, very little further care or attention need be given them once they are in place.

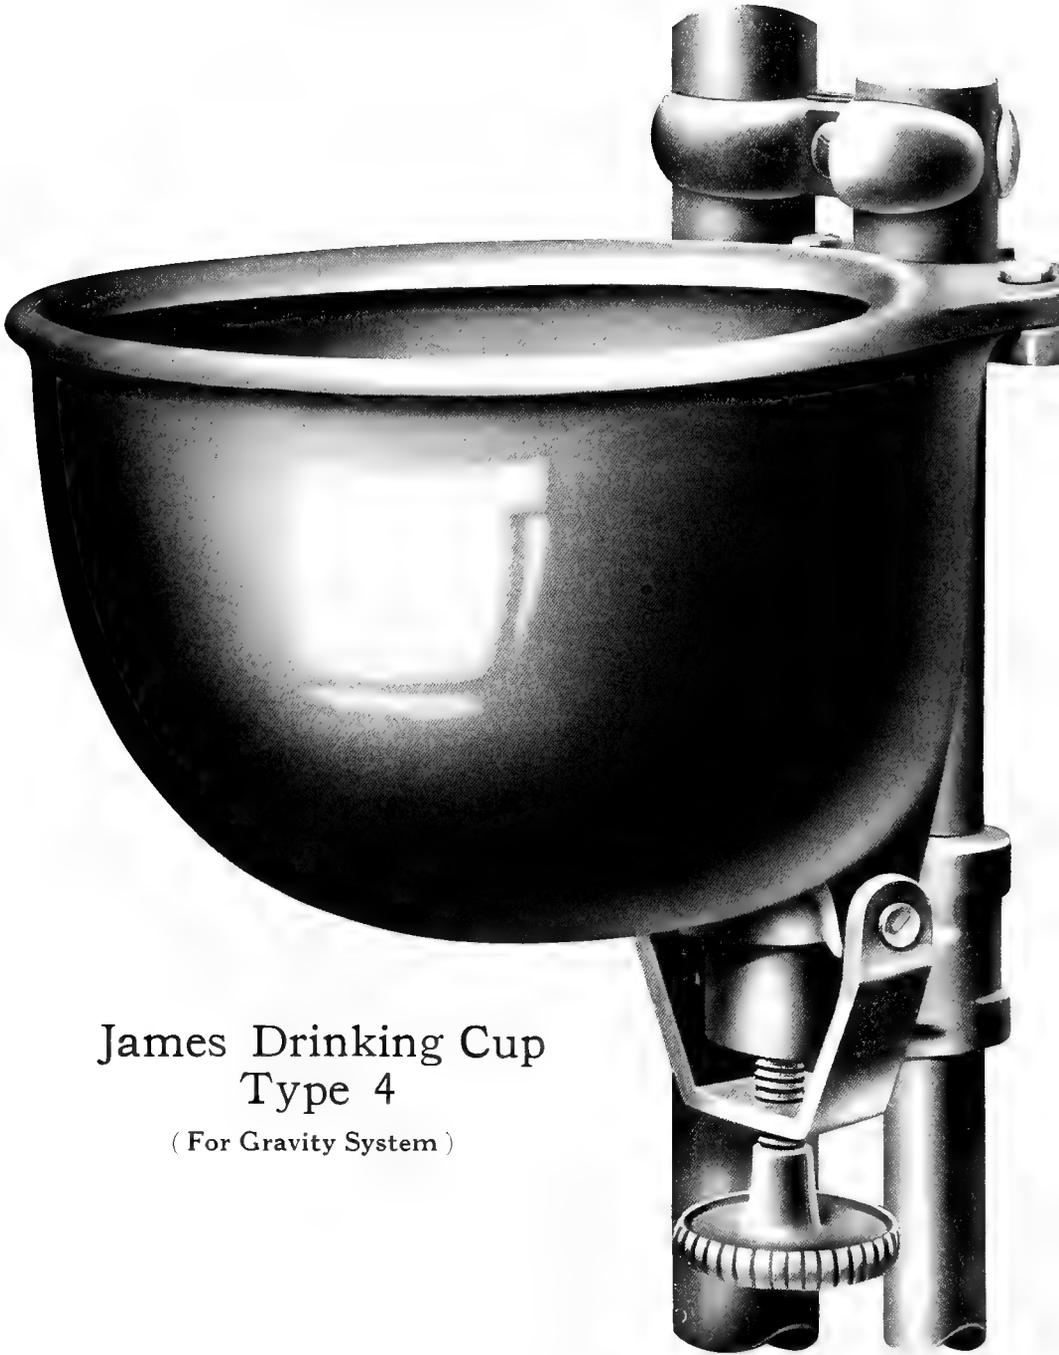

James Drinking Cup
Type 4
(For Gravity System)

An occasional cleaning is all that is necessary. This is easily done with the one-cow cups by simply removing the cups from the stall posts, dumping the water out and cleansing the cups. It is just as simple a matter to clean the two-cow cups, which is done by removing the drain plug, all loose dirt flushing out as the cup empties; a few strokes with a whisk broom or brush, as the water flows out, completes the job.

The baked on enamel finish provides a smooth, clean surface that does not readily catch deposits or dirt or grime, and is easily kept in sanitary condition.

Location of Cups

Experience has proven that the location of the cup has a vast deal to do with the amount of dirt that accumulates in it.

Cups located in front of the stall posts to some extent catch hay and feed and thus get dirty quickly. The best location is between the stanchion and the stall post (see page 164 and 166) in which location the cup is kept away from the feed while at the same time it is convenient for the cow. Thus placed, it is surprising how clean the cups will keep.

In this location, too, the cup also acts as a sort of sure stop, filling in the open space where a cow might occasionally put her head when entering the open stall. This location does not prevent raising the mangers, or interfere with the cow's comfort. When standing, she turns her head above the bucket and when lying down, she turns her head below the bucket.

Location Adjustable

However, the one-cow cups can be placed as desired, the fittings provided making it easy to place the cup in front of the stall post, in back of the post, or at the side.

Cups for Gravity System

James Drinking Cup, Type 4

(PATENT APPLIED FOR)

This cup is extremely simple in construction, consisting merely of the cast iron cup itself, fitted with a removable non-rusting valve which allows the water to enter, but prevents it from flowing back.

The construction, the simplicity of the cup, the ease of cleaning, and the method of installation is all made clear by the pictures on pages 166, 168 and 172.

With drinking cup, type 4, a regulating tank is required, as shown on page 174, either type A or type B; together with the necessary piping to connect and a constant source of water supply such as a supply tank.

James Drinking Cup, Type 5


(PATENT APPLIED FOR)

This cup is for two cows.

The cup is of cast iron, fitted with the same removable, non-rusting valve used in cup type 4, which allows water to enter but prevents it from flowing back.

This cup is not removable. Instead, for the purpose of cleaning, it is provided with a large drain plug, which can be readily removed, the dirt flushing out as the water empties. A few quick strokes with a whisk broom or brush while water is flowing out cleanses the cup thoroughly.



Installation is a simple matter, the system requiring only the cups, a regulating tank (page 174) piping to connect and a supply tank or other constant water supply.

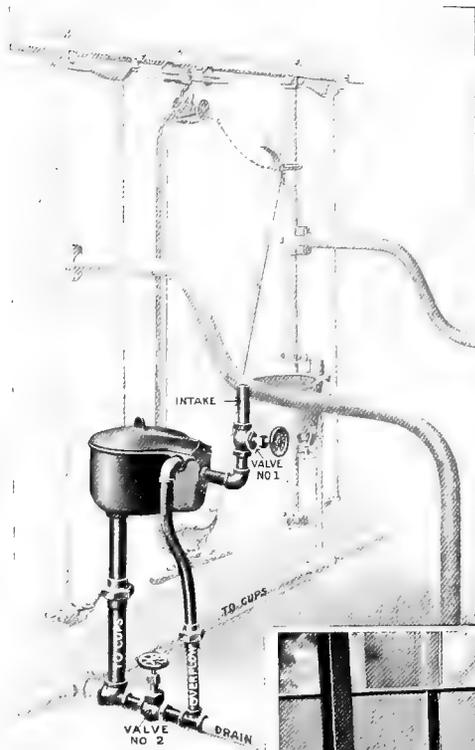

TO DRAIN SYSTEM
CLOSE VALVE NO 1
AND OPEN VALVE NO 2



James Regulating Tanks

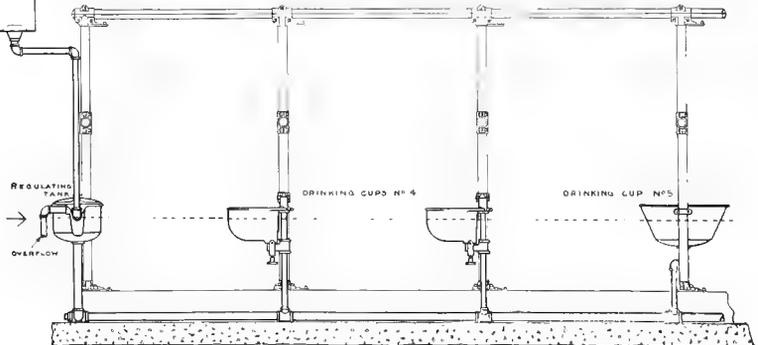

James Regulating Tank A

For Cups Types 4 and 5

(PATENT APPLIED FOR)

It keeps the water constantly at the right level in the drinking cups. Takes up very little room. It is sensitive to the slightest outflow of water from the drinking cups, marvelously quick in feeding more water when the level of water in cups is lowered ever so little, and in shutting off water when cups are filled.

With the James regulating tank on the job, your cows are assured a full supply of water, day and night, even though all may be drinking at the same time. It will feed all the water the pipe will carry, or a drop at a time, just as the cows drinking water from the cups may require.

The greatest obstacle to the success of drinking cup systems heretofore has been the lack of a satisfactory regulating tank—one that is trouble proof and that would maintain a constant supply of water in the cups.

The James regulating tank is wonderfully efficient, its great success being due to an ingenious self-balancing valve which accommodates itself to varying water pressure, working with the same certainty and uniformity on two pounds water pressure as it does on fifty pounds.

With your regulating tank so located that its water level is the same as the level desired in the drinking cups, neither cups nor regulating tank can overflow.

It requires such small space that it may be located under a stall partition, if desired, as shown on page 174, either at the end or in the center of a row of stalls. It will not interfere at all with the comfort of the cow.

Drinking Cups for Pressure System

James Drinking Cup Type 3

(PATENT APPLIED FOR)

The cup is simple, consisting merely of the smooth surface cast iron cup, with non-rusting trouble-proof inlet valve, and controlling lever (by pressing which with her nose the cow opens the valve while drinking.)

The valve is kept closed not only by the pressure of the water but also by a coiled spring (of non-rusting spring brass), and there is no chance for water to flow back from one bowl to another. This prevents any possibility of spread of disease.


Easy to Clean

The cup is easily removed from the stall post, by simply tripping the supporting lever. The water may then be dumped out of the cup, valve lever lifted out and the cup cleansed or sterilized. It is just as simple a matter to replace the cup. The illustrations on pages 170 and 176 make very clear the construction of the cup, its simplicity and the ease of removing from the stall post and cleaning.

Installation

The upright pipe connecting the cup and the feed pipe is shipped with supporting lever and valve attached, making installation very simple.

The pressure system requires only one size pipe and fittings, $\frac{3}{4}$ -inch throughout. This pipe fits neatly against the floor and curb entirely out of the way. Or it may be so installed as to feed from above.

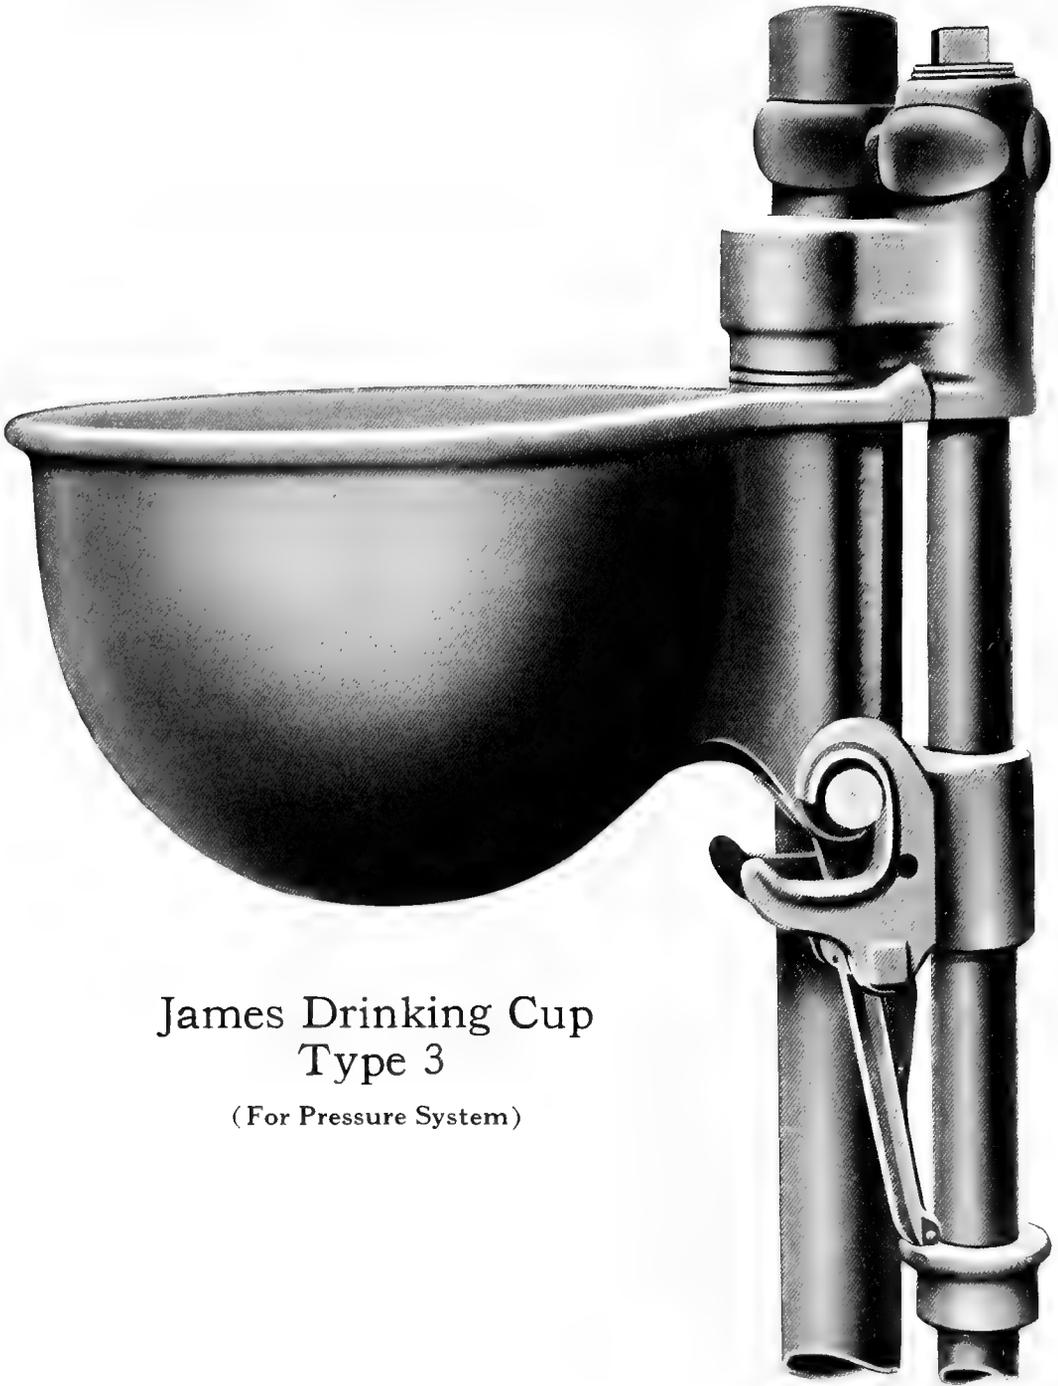

James Drinking Cup
Type 3

(For Pressure System)


James Drinking Cup Type 6

(PATENT APPLIED FOR)

This is the same cup as type 5, excepting that a valve similar to that used in type 3, has been substituted for the valve in type 5, so as to adapt this cup to the pressure system.

Provided with a large drain plug which can be readily removed, the dirt flushing out as the water empties. A few quick strokes with a whisk broom or brush while water is flowing out cleanses the cup thoroughly.

No regulating tank is required for either drinking cup type 3 or type 6. The system requires only cups and piping to connect with the water supply.

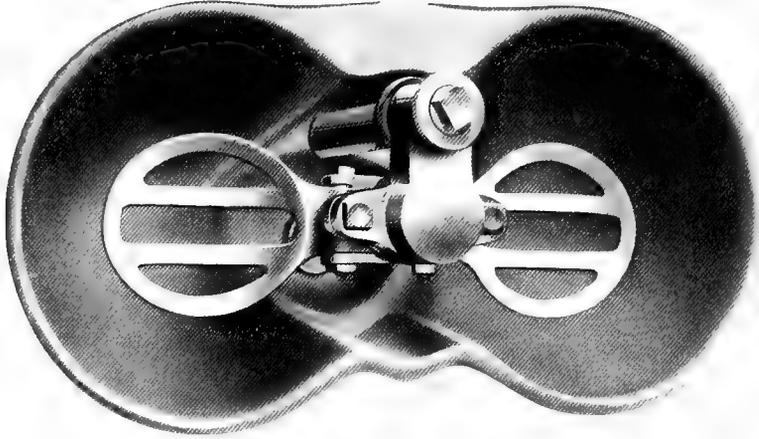

James Drinking Cup Type 6. For Two Cows. Pressure System.

James Drinking Cup Wash Tank

(See Page 178)

This equipment makes very simple the matter of cleaning the drinking cups.

The tank, placed on a James milk can truck, can be passed along at the rear of the stalls, the cups lifted from the stall post, emptied into the larger compartment of the tank, then washed in the warmer water which is carried in the smaller compartment.

SPECIFICATIONS

To be used on truck shown above.

Tank made of 18-gauge galvanized sheet steel, strongly reinforced at the top with $\frac{7}{8}$ -in. x $1\frac{3}{8}$ -in. x $\frac{1}{8}$ -in. galvanized angles; all joints securely riveted and soldered both inside and outside.

Divided into two water tight compartments $17\frac{3}{4}$ inches long, 21 inches wide, 13 inches deep and $34\frac{1}{2}$ inches long, 21 inches wide, 13 inches deep.

Over all dimensions of tank are $24\frac{3}{4}$ inches wide, $53\frac{3}{4}$ inches long, 13 inches high. With each wash tank is included a No. 19 Palmetto Garland sanitary brush.



James Drinking Cup Wash Tank

GOOD AS A SILO FOR MAKING MILK

Herman Olson, Cambridge, Wis., February 21, 1917:

"The greatest profit maker to any stockman, according to cost, are James water buckets; if every cow keeper understood and would consider the great time-saving to himself by doing away with that bothersome old tank heater and also the added fuel expense for it, besides the great loss of milk that results when cows are turned out of warm barns in zero weather, I am positive every dairyman would immediately have water buckets. I consider them in relation to outside tank watering in the same relation as the modern silo is compared to the old habit of feeding dry corn stalks outside on the snow banks. Water buckets will easily pay for themselves the first winter by a bigger milk yield alone."

TWO POUNDS MILK PER COW—SAVES HALF HOUR DAILY

Mr. R. Kamminza, Boyden, Iowa, November 10, 1917, writes:

"The James drinking cups, as nearly as I can estimate, increased my milk yield two pounds per cow per day and they save me a half hour's work daily. I used to water the cows from a tank in the yard, warming the water with a tank heater, and the cups save me from five to ten cents a day on fuel and labor to run the heater. The drinking cups are a big labor-saving and paying proposition."

THINKS DRINKING CUPS INCREASE MILK YIELD 20%

Mr. H. W. Cort, Galesville, Wis., writes November 1, 1917:

"I cannot say exactly what the milk yield increase is as a result of using James watering buckets, as I have always used them and have no previous experience with which to make comparison. However, I think the drinking cups must increase the milk yield 20 per cent."

20% MORE MILK—ONE HOUR LESS WORK

D. D. Decker & Son, South Dayton, N. Y., write December 19, 1917:

"We find that our milk yield increased 20 percent, as a result of using James drinking cups, these figures being shown by our milk records. The drinking cups save us an hour a day in turning the cows out to water and putting them back in the barn. We used to water the cows in a tank in the yard but did not heat the water with a tank heater."

"BEST INVESTMENT I EVER MADE"

Oscar E. Twitchell, Milan, N. H., May 17, 1917:

"The James water buckets that I installed last fall are the very best investment in dairy barn equipment that I ever made, both from the standpoint of cow and caretaker. They paid for themselves this winter."

HEAVY INCREASE IN MILK

John Hetts, Fort Atkinson, Wisconsin:

"After my experience for ninety days past with James drinking cups, I am convinced that with any high producing cow drinking cups will pay for themselves inside of thirty days in increase of milk yield.

I know that when cows are turned out into the yard to drink, in cold weather, oftentimes they will not go near the watering tank, even though the water be warm. With the drinking cups they have water before them all of the time, drinking and eating alternately, drinking most heavily after eating silage. I think it far better for the cows to take the water a little at a time with their feed, rather than drink a large quantity at any one time.

I consider drinking cups protection against spread of tuberculosis and there is also a considerable saving in time, enough during the season to offset the cost of the outfit."

"REMARKABLE INCREASE"

J. W. Miller, Middlefield, Ohio, October 30, 1917:

"I am very highly pleased with the results I am obtaining from James drinking cups. I saw a remarkable increase in the amount of milk the first morning after the cups were in."

AS GOOD AS A SILO AS A MILK MAKER

Mr. Walter Bringold, Wanamingo, Minn.:

"If I could have but the one, judging from my experience, I would rather have James drinking cups than the silo, as I believe the drinking cups made more milk."

2% TO 10% INCREASE OF MILK

Rudolph Martig, West Concord, Minn., writes November 12, 1917:

"Although we did no testing before using the James drinking cups, it is our opinion that the milk yield increased from 2 per cent to 10 per cent as a result of installing the cups.

Also we find the drinking cups save us one and one-half hours a day as compared with our former method of watering. It used to be a good deal of a job to clean out the manger trough.

It used to cost us, according to our best estimates, 50 cents per day for fuel and labor in warming the water in the tank outdoors, so that all together the saving is considerable. We would not get along without drinking cups at twice the cost.

The cows when let out will drink too much cold water at one time, while with the drinking cups they drink often. The cows in our barn can be heard drinking any time of day."



Unit of Peter...
Shelburne Wis.
Equipped the James Way



Home of Albert Dean
Islington, Miss.
Equipped the James Way

The James Carriers



HERE the manure is loaded on to the spreader and put on the fields at once, the James Carrier makes it possible to get the manure on to the soil with *but the one handling*—that of loading the tub in the barn.

That's some different, isn't it, from loading the manure into a wheelbarrow—pushing it out through the barn, leaving a trail of dripping filth—across a mushy yard and up on to a manure pile, trying the strength and patience of the strongest man; afterwards loading the wagon from the pile, losing the liquids; then hauling it to the field, dumping in piles and later scattering with a fork.

The big tub of the James Carrier holds as much as three or four wheelbarrow loads; the carrier can be run out and dumped in less time than a single wheelbarrow and it takes no longer to load manure into the carrier than it does into the wheelbarrow. The saving of time and work is very large.

The James Manure Carrier not only saves much of the hard work, but it saves you many dollars' worth of liquid manure which could not be saved in any other way; the saving of liquid manure alone will go a long ways towards paying for the carrier.

When the wheelbarrow method is used, the manure is quite apt to be piled near the barn. But with the James Carrier, it is easy to put the pile far away from the stable, so that there will be no fumes of ammonia arising near the building to damage the paint, rot the sides and sills, ruin the finish of vehicles near by, injure the health of the animals, or taint the milk. You can keep a clear space between the barn and the pile or manure shed.

The James Feed Carrier or the James Feed Truck will save you so much walking back and forth to the feed room, and will save you so much work and time, that you will wonder how you ever got along without it.

You can feed twenty-four cows or more the James way, with no more walking and in the time required to feed a few by the basket method.

Your feed basket holds enough silage for only one or two cows; the James Carrier or James Feed Truck holds sufficient for twenty-four to twenty-eight. And the James way is easier, because you have no weight to carry—the silage being loaded into the tub at the silo or in the feed room, and rolled easily along in front of the mangers. The James Milk Can Carrier and Harness Carriers are also time and labor savers.

SAVES 100 MILE WALK EACH WINTER


Paulson Bros., Independence, Wisconsin: "We are more than pleased, with the outfit, as it actually cuts the chores in half. In the first place the feed truck saves us eight trips the length of our 100 foot barn, over carrying silage in baskets. And the litter carrier, every trip you make with it saves two extra trips with the wheelbarrow."

"The cows can do better as one can keep it more sanitary for them. The swinging stanchions keep them comfortable. Besides, the modern steel fixtures make the barn lighter.

"To sum it up, why a man can put on his best Sunday clothes go to the barn and do the chores without being "mussed" up. And last but not least, you don't have to invite the cows a second time to come in, as we know some cows will attempt to jump over the doors if we don't open soon enough to suit them."



Wagon Way at Barn of M. Patterson, Chasde Ford, Pa.

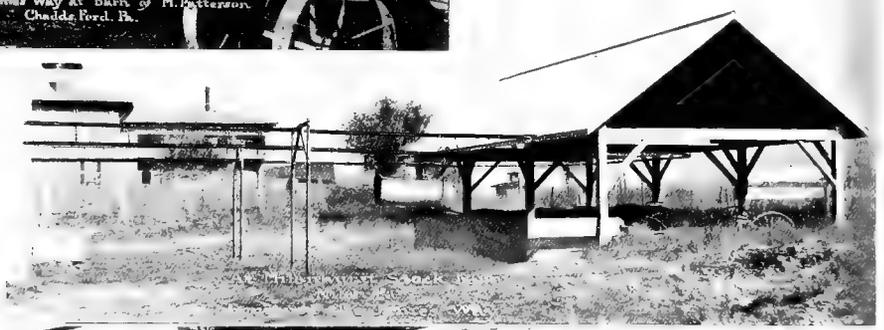

Wagon Way at Barn of M. Patterson, Chasde Ford, Pa.



Why Hire a Man to Push a Wheelbarrow?



The Most Undesirable Job on the Farm

All the James Carriers are more nearly indispensable than any hay carrier, for these carriers save work each day throughout the whole year. We claim for all James Carriers that with them you can do the work for which they are intended more quickly, more easily, and at less daily cost, than you can in any other way. And if they don't make good, you can get your money back.

The James Carriers have many important and distinctive features, not only in the carrier itself, but in the track, hangers, switches, removable track section and swinging steel crane.

All the objections to the ordinary carriers are completely overcome; and in addition the James Carriers possess added improvements never before utilized in carrier equipment.

They are not an experiment. The men who originated them and brought them to their present state of perfection know from experience just what is required of a carrier, for they have been practical, successful dairy farmers themselves, and have used, or seen in use, probably every carrier on the market.

James Carriers are the result of long years of observation of the various types in actual use in barns, where the strong points and the weak features have been shown up by the wear and strain of daily use.



The strong points have been retained and new features added, making them the most practical, most serviceable and most satisfactory of all.

A litter carrier has heavy work to do. Not only must it oftentimes carry half a ton of manure, but it is in daily use throughout much of the year. Slammed about by careless help, or in the hurry of cleaning up the chores, some part will give way unless it be exceptionally strong and well made.

James Litter Carriers are more strongly and heavily built than any other on the market, every part is heavy enough to carry three times the load to which it will ever be subjected as a manure carrier. The track and hangers, the safety switches, the removable sections, and the swinging crane all have several times the strength necessary to support the carrier when most heavily loaded. No amount of ordinary rough usage will cause a breakdown.

James Carriers are much heavier than others for which you would have to pay the same price; the extra weight of malleables and steel alone costs us several dollars more on a carrier, to say nothing of the better workmanship and superior finish. Yet we offer them to you for the same price that you would have to pay for the lighter weight and more poorly constructed outfit.

This extra weight means heavier malleables, a stronger angle iron framework through the tub, steel plate reinforcement on the ends, a solid, cold rolled, steel shaft—in fact greater strength at every point where strain or wear may come. It insures durability, a saving of repairs, and makes certain satisfactory service for a long period of years.

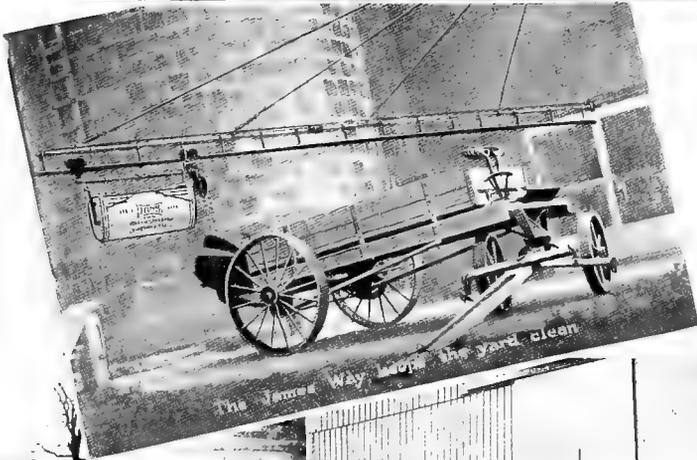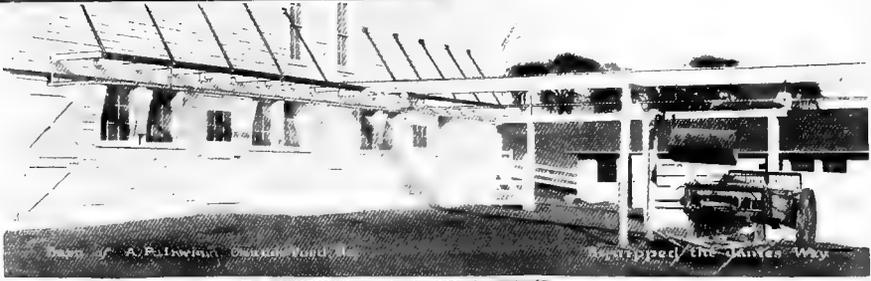

The simplicity of the entire James Carrier outfit also makes for greater strength and durability, the extra weight of material being only at those points where strength is needed; and there are no complicated parts to wear.

In the following pages we have described the carriers in detail, and we want you to note that in each case we have stated the exact weight and given complete specifications, so that you may compare for yourself our carriers and those offered you by others at equal or higher prices.

The photographs and descriptions show why it is that James Carriers are more easily erected and more easily operated than any others; why they run more smoothly on the track; how they meet every condition ever required of a carrier in the barn; why the I-Beam track is more suitable in every way for curves, switches and outside work; how the automatic safety stop blocks make it impossible for a carrier to run off the track; and how the simple construction eliminates worm gearings, ratchets and cogs that are so liable to wear or break.


And as you study the carrier proposition, we ask that you bear in mind that while there may be carrier outfits offered you at lower prices, the James Carriers are so built as to cost you by far the *least per year*—and that is the only fair way in which to figure the cost of any article.

James Carriers are “long life” carriers—built to stand the strain and wear of years—made to forestall breakages and repairs—made to save the maximum of work and time. We are proud of them, believing that each is the best that can be built to meet the specific purposes for which it is designed. And in this belief, we are backed up by the hundreds of enthusiastic, commendatory letters received from owners of James Carrier outfits.

Of all the litter carriers, the one that has the largest sale, and hence apparently best meets the requirements of the average dairyman, is the “Big Boy” Carrier; and this is the outfit which we would recommend for the barn in which fifteen head of stock or more are being cared for.

The Combination outfit fills the need in small barns, where the rigid I-Beam track is wanted inside, with a rod track outside—so as to have the advantage of the automatic return secured only by use of the rod track. With fifteen head of stock or more, however, the “Big Boy” with the swinging steel crane or outside arch support is recommended, for the reason that in the long run it will prove more satisfactory and more economical.

The “Chore Boy” is recommended only for the smallest barns, where but a few head of stock are cared for.

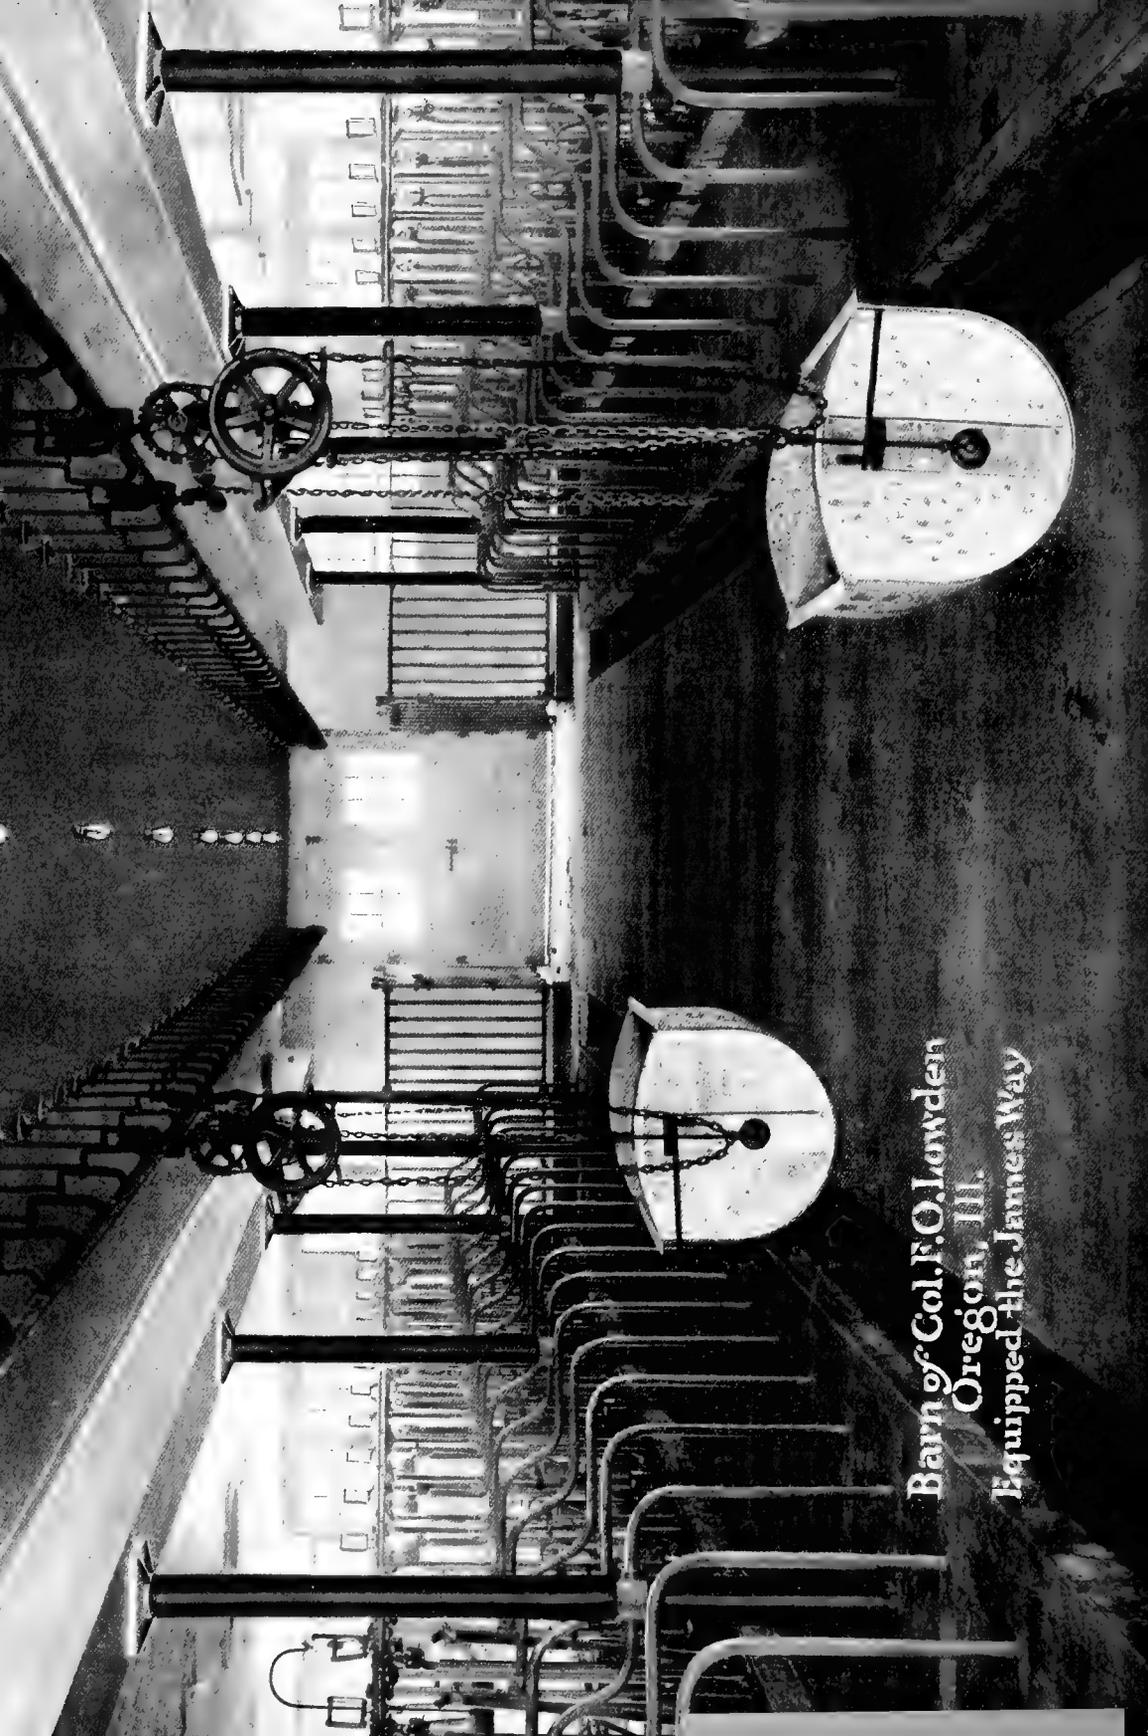

Barn of Col. F. O. Lowden
Oregon, Ill.
Equipped the James Way

Special Features of James Carriers “Long Life” Tubs

The James Carrier tubs, like the rest of James Equipment, are built to last throughout long years of heavy usage. Although a tub full of wet manure weighs but 650 pounds, the “Big Boy” tubs have been subjected to a test of three times that weight, without breaking or developing any weakness, either in the tubs or the other parts of the carrier outfit. The Combination and the “Chore Boy” carriers are of equal strength in proportion to the loads which they are designed to carry.

James tubs are so shaped as to be self-cleaning when dumped, there being no corners where litter can collect. Ends of tubs are rounded, higher than the sides, making them neater in appearance and providing more capacity. Also prevents contents of the tub from binding the bail or clogging the latch and thus interfering with the proper dumping.

Liquid manure is often the last to be loaded, and is apt to settle at the ends; the rounded ends being higher than the sides prevent the liquids from slopping over the ends when you push carrier along the track. This higher rounded end costs much more to build, but it is a feature greatly appreciated by the user, helping to keep hands, clothes and floor clean.

James tubs for the “Big Boy” carriers are constructed of 18-gauge galvanized steel, well riveted, not spot welded, to a framework of galvanized angle iron. 147 rivets are used on the tub. The angle iron at the side edges is $1\frac{1}{2} \times 1\frac{1}{2} \times \frac{1}{8}$ in. and at the ends $\frac{7}{8} \times 1\frac{3}{8} \times \frac{1}{8}$ in.; end of tub reinforced with steel plates weighing $4\frac{1}{2}$ pounds each, $4\frac{1}{2}$ in. wide by $\frac{1}{8}$ in. thick. Rivets are $\frac{3}{16}$ in. sherrardized, excepting corner rivets which are $\frac{1}{4}$ in.

The heavy angle iron framework, steel plate reinforcing on the ends and the heavy riveting give the James tubs great strength and durability, making the tubs almost indestructible, and absolutely rigid so that they will not rack. The strength of these tubs, and the superior workmanship put into them, cannot well be described; but can be appreciated only on seeing the tubs themselves.

Bail

When the “Big Boy” carrier is dropped to the floor, there is no horizontal bar in the way to interfere with loading. But when the tub is raised, the bail hangers lock in position against the horizontal shaft, forming a complete bail, and giving necessary rigidity to insure the carrier running steadily along the track.

Thus the bail of the carrier is in place only when a complete bail is needed, and is out of the way while loading the tub.

The bail hangers are heavy, flat steel bars, $\frac{5}{16} \times 1\frac{1}{2}$ in. with malleable fittings. Being turned *edgewise* to the tub, the bail hangers will not bend when a sudden jerk of the tub puts strain upon them. In carriers where such hangers are turned *flat side* to the tub, sudden endwise jerking of the carrier may bend them, interfering with the operation of the latch and trip.


Dumps Either Side

Tub can be dumped to either side, according to which side is loaded the heavier. This makes it easier to load the spreader or wagon evenly, and gives greater dumping area.

The simple latches at each end of the tub are so connected as to lock and unlock simultaneously; latches are protected against clogging with manure.

Gudgeon

Gudgeon is of malleable, strongly riveted to the bail hanger. Gudgeon support is riveted through the two thicknesses of galvanized steel—the end of the tub and the steel reinforcing plate—and the rivets will not pull through.

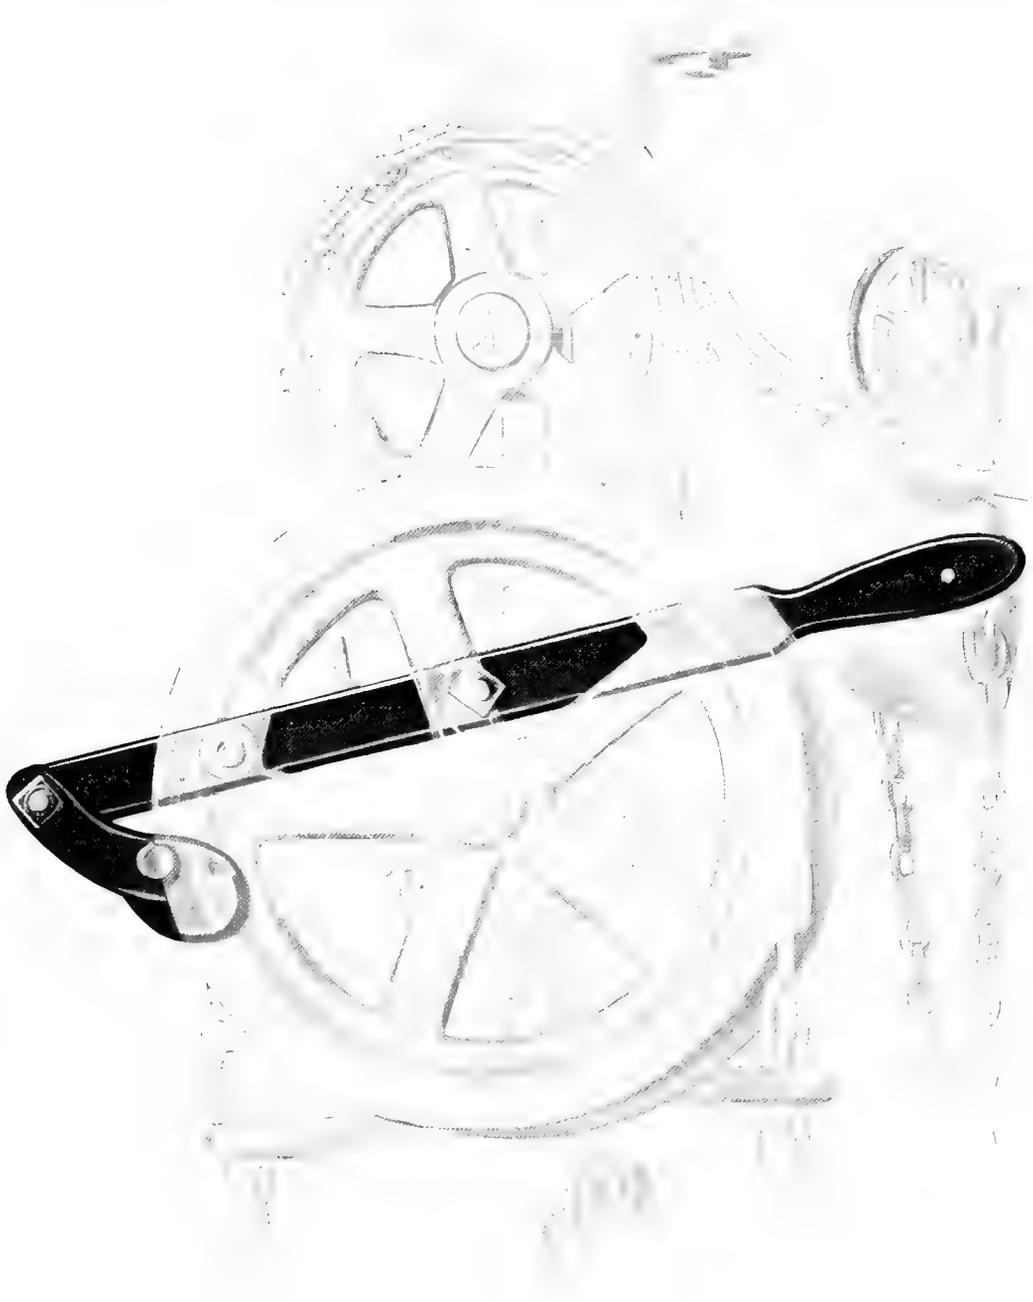

“Big Boy” Hoist, with Absolute Control Clutch and Brake

Absolute Control Clutch and Brake

(PATENTED)

This exclusive James feature makes possible the quick lowering of the tub by its own weight, thus saving time in doing the chores—yet keeping the speed of descent under the absolute control of the operator.

The friction brake enables the operator to lower the tub slowly—a sixteenth of an inch, or the entire length of the chain—or drop it quickly to within a few inches of the floor, and stop it almost instantly.

The empty tub can be dropped from an eight-foot track to the floor in five seconds; the “Big Boy,” filled, can be raised to an eight-foot track in from 20 to 25 seconds. The first time you have a chance, compare this record with other carriers, and then figure out for yourself how much time this one feature will save you in a year.

The friction brake and the clutch are both controlled by the one lever, hence both are operated with the one hand. It is not necessary to touch the hand chain when lowering the tub—the one hand and the one lever starts, controls and stops it.

When ready to lower the tub, a quick, strong pull on the control lever will release the clutch and set the friction brake; the pressure on the lever then controls. Release the pressure somewhat and the tub begins to descend; a slight pull slackens the speed regardless of the weight in the tub; a stronger pull stops the descent.

The lever may then be released entirely, setting the clutch instantly, holding the tub firmly at that exact point; the clutch never slips.

This clutch is also a time saver when raising the tub, because it prevents any slipping back, a thing that is so annoying when raising a loaded tub with a hoist using dog and ratchet. The James clutch takes hold so quickly and firmly that, no matter how heavy the load, the James Carrier cannot slip back a fraction of an inch, even though it be raised an inch at a time. There is no lost motion.

There are no ratchet teeth on the James Carrier, nothing to break or get out of order. The X-ray picture on the opposite page shows the simplicity of the mechanism and how it operates. In the picture the clutch is set.

“Big Boy” Hoist

Even a boy can operate the “Big Boy” carrier. The hoist is so geared as to make possible raising a heavy load in the shortest time without undue effort.


The chain and sprocket type of hoist is used, the chain being the same size as that used to drive most grain binders. Every mechanic knows that this type of hoist has the least friction, excepting only the direct hoist which, however, requires more power.

The worm gear hoists so often used are extremely wasteful of power because of a loss of power through friction; this may be verified by any textbook on the subject, or by any engineer. The mere fact that with worm gear type of carriers the tub will not lower of its own weight, but must be pulled down as well as up, shows how great the friction must be in the worm gear hoist. When the brake and clutch on the James Carrier are both released, the tub drops almost instantly, running free, proving how little the friction is.

The frame carrying the lower sprocket of the “Big Boy” hoist is adjustable to take up any slack in the chain, thus making it possible to overcome the effect of any wear in the lifting apparatus. Hoist is constructed throughout of the best iron and steel. All bearings are machined—not merely cored.



Oil Groove
Tracker Wheel Axle

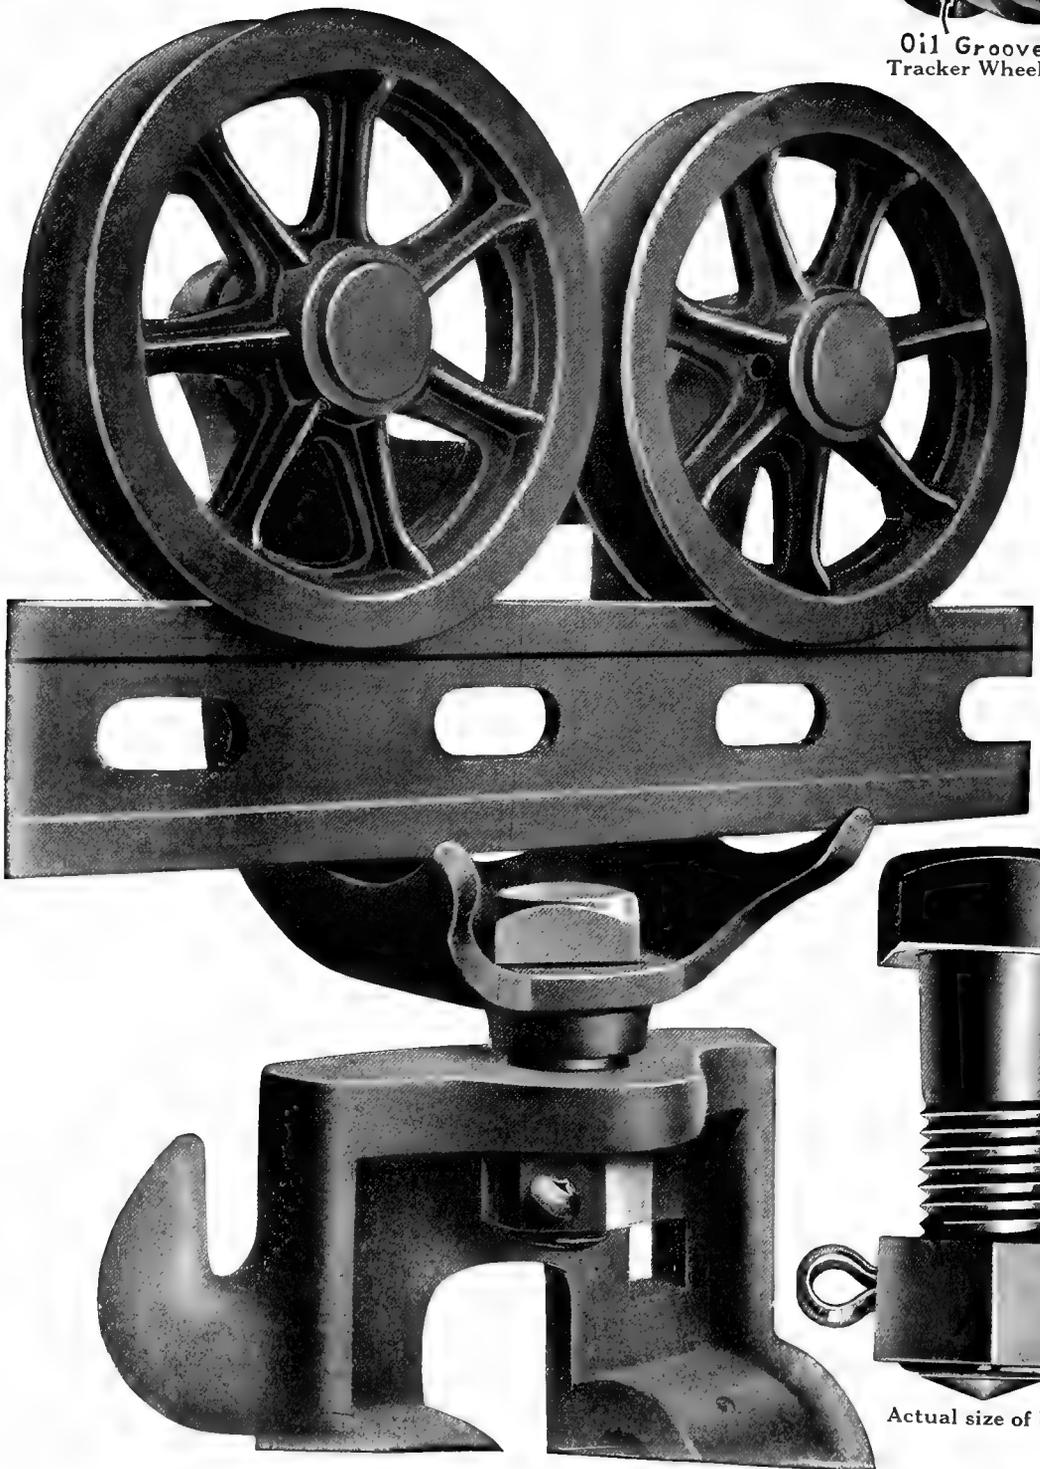

Actual size of bolt

Simple Chain Guides

Simple chain guides of malleable prevent the hand chain running off the hoist wheel.

“Long Wheel Base” Tandem Trucks

Each truck has two large, grey iron travelers, mounted tandem in a swiveled tracker wheel frame, like the trucks on a railroad car.

This arrangement keeps the travelers always in alignment with the track, doing away with any tendency to turn and bind, causing friction and wear. It also does away with any tendency to jerk, and make the carrier push hard.

Every farmer who has ever owned or used one of the older style of carriers that run on a flange track, with the tracker wheels side by side, will remember distinctly enough how jerkily and unevenly such a carrier runs on the track, and how hard it was to push.

But how many have ever stopped to figure out the cause of the jerking motion? Perhaps this will explain it.

Each truck of a carrier is hung on a swivel, so that the carrier will take the curve. In order that the trucks may swivel, there must be some play in the swivel joints. When you start to shove the loaded carrier along the track, the friction on the track flanges causes the tracker wheels to lag back—then suddenly the shove on the carrier becomes strong enough to overcome the friction, when the tracker wheels jerk forward.

Then they lag back again—then jerk forward. You who have used such a carrier know how hard it is to push along the track, and how as the swivel wears more and more, the trouble becomes more and more aggravating.

This jerkiness is forestalled in the James Carrier by means of the tandem tracker wheels. For any of the tracker wheels on a James Carrier to lag back or jerk forward, it would be necessary to raise either the front or the rear wheel. Here's an illustration:

Take an ordinary hoe, and hook the shank over the track; give the handle a shove parallel with the track, and it will swing back and forth like the pendulum of a clock.


Now take a two prong or two shank garden hoe, and hang this over the track so that both shanks touch the track, giving you a two-point suspension, the same as you have with the James tandem tracker wheels. Now give the handle a shove in line with the track, it will sway back and forth two or three times and settle into position.

This is brought about by the fact that in order to sway, it is necessary to raise one of the two points of suspension. The same principle applies to James tandem tracker wheels.


The tracker wheel axle is of lathe-cut steel, the journal being machined and surfaced to size, so that the axle fits perfectly. There is an oil pocket around the axle, which distributes the oil evenly, adding to the life of the carrier and making it run more easily and smoothly. The oil pocket is filled through oil hole in the hub shown in the picture.

Keeper Prevents Carrier Jumping the Track

The tracker wheel frame is so shaped that it prevents the carrier from jumping the track; in fact, the carrier can be removed only by the human hand, swinging the tracker wheels, wheel frame and frame support to one side and lifting them at the same time.

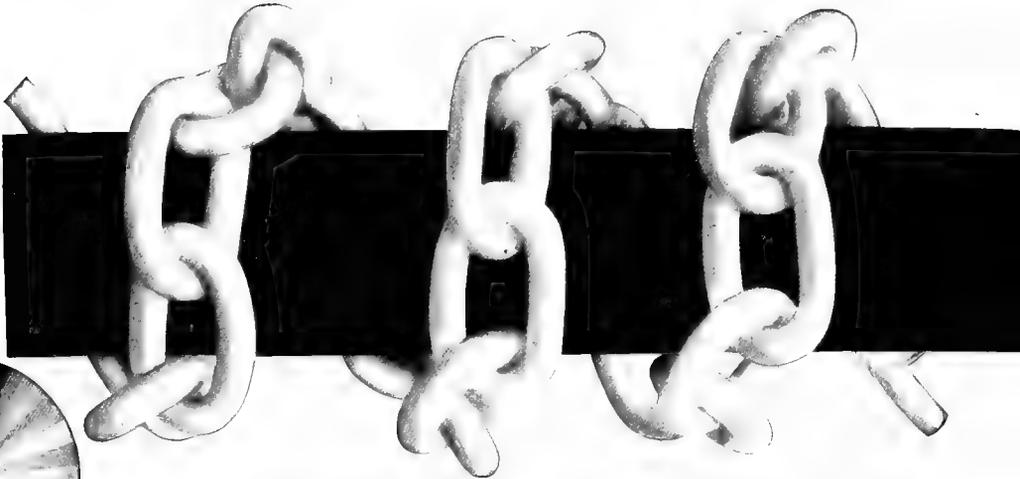

Solid Steel Shaft and Lifting Chain—less than actual size



Actual Size of Shaft



James Removable Track Section



Splice Block for James I-Beam Track



James I-Beam Track—actual size

Solid Steel Shaft

The shafts used on all James Carriers are of cold rolled, solid steel, $1\frac{1}{4}$ inches in diameter. The quality of material is the same as that used in factories for line shafting, where its strength and success have been fully proved.

The solid steel shaft will not bend—it may spring a trifle with an overload, but when the weight is removed it immediately springs back into place.

The solid steel shaft is rolled to exact size, and fits the bearings and sprocket perfectly, leaving practically no chance for any play and wear. Tubing, on the other hand, though often used for carrier shafts, is not suited to the purpose, because it varies in size, and cannot be made to fit accurately; and because tubing once bent, remains bent.

Lifting Chain

The lifting chain or cable is the weakest point in many carriers—the limited winding space on the shaft making it necessary to use small chain or cable of insufficient strength.

The lifting chain on James Carriers has the full length of the shaft on which to wind; heavy, straight link chain is used, this being strongest and best suited to the purpose.

It is attached to the center of the shaft and winds up in such a way that it forms an open spiral—the chain does not climb upon itself, causing it to rub and wear. Chain is tested for five times the load it will have to carry.

The three point suspension distributes the load equally along the shaft; and gives a double purchase, making it easier to raise the tub.

High Lift Feature

The long winding space on the shaft makes it easy to transform the carrier into a high lift carrier, by merely putting on longer lifting chains. There is plenty of room on the shaft for all the chain required for any ordinary height of ceiling.

The James Carrier tubs raise closer to the track than others, thus oftentimes avoiding the necessity of excavating when there is a rise of ground just outside the door; the carrier more readily clears the spreader or wagon, and the manure can be piled higher when it is necessary to let it accumulate in the yard.

The "Big Boy" Carrier with tub, in raised position, measures but three feet from bottom of track to bottom of tub.

Removable Track Sections

Used to permit closing of sliding doors; also used where two tracks cross, and for other necessary openings. When removed, automatically sets stop blocks, making it impossible for a carrier to run off the open ends of the track.

Standard length is fourteen inches, but for driveways, etc., can be supplied any length.

I-Beam Track

(PATENTED)

The James Track has many important advantages not possessed by other tracks.

In the first place, it can be quickly and easily put up, even by inexperienced help—in fact, is easier to erect than any rod track. And once in place, it is there to stay.

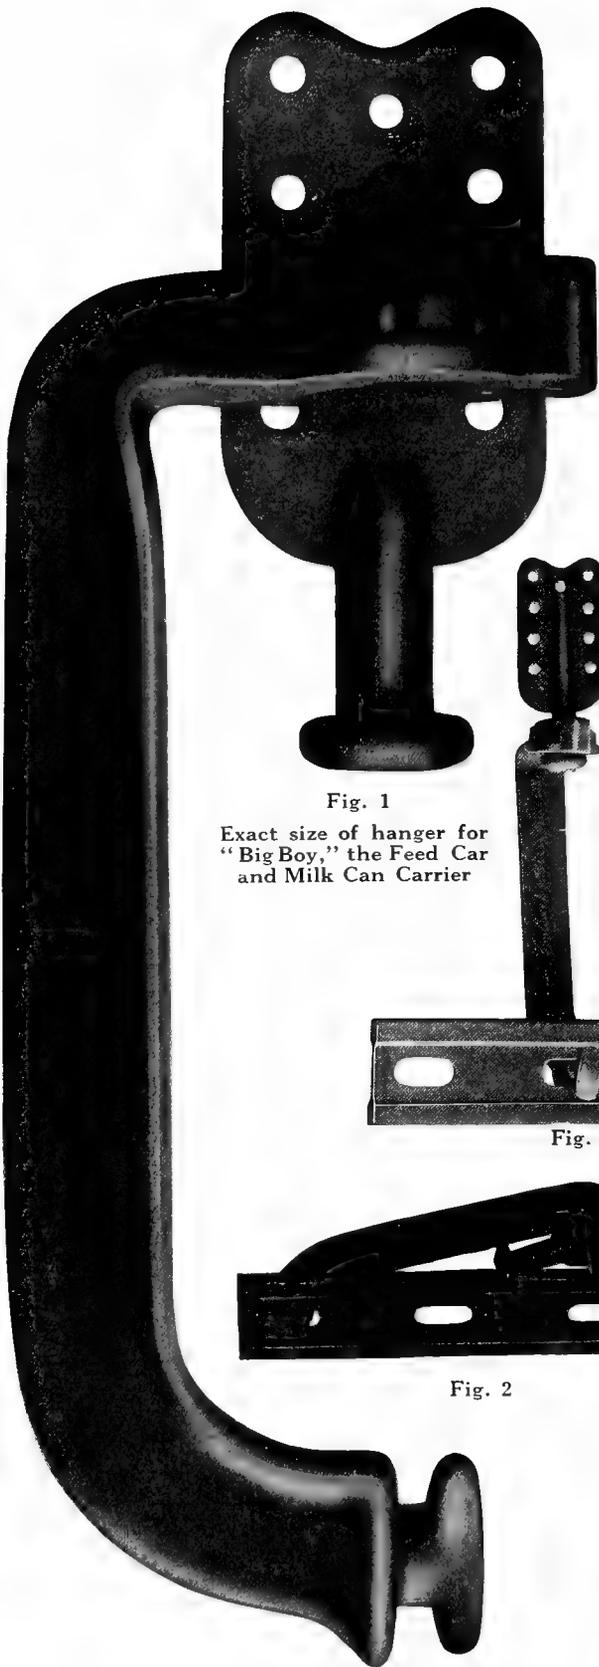


Fig. 1

Exact size of hanger for
"Big Boy," the Feed Car
and Milk Can Carrier



Fig. 4

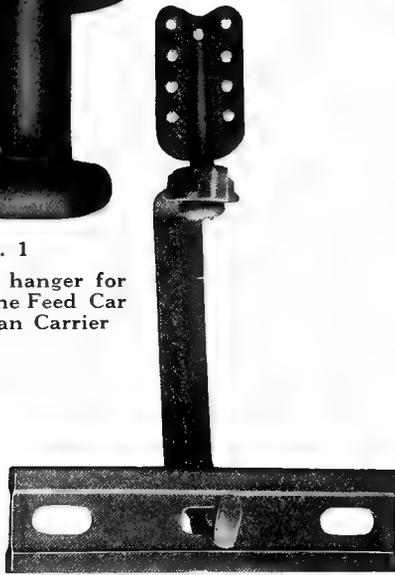


Fig. 3

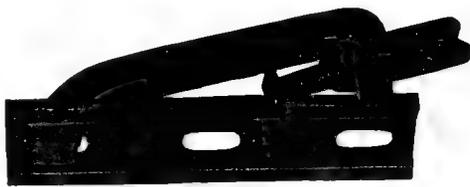


Fig. 2



Fig. 5



Fig. 6

There is nothing about it that will give, spread, loosen or get out of order; it is trouble proof—and will stand up under long years of heavy service.

No bolts or nuts are required for putting track and hangers together. The hangers "button" to the track and the nailing plates "button" to the hanger, the plates being nailed to the joists. If the barn is ceiled, ceiling plates with lag screws are used instead of nailing plates. The few simple instructions sent with each order, enable any one to get a first-class job, with the track perfectly levelled.

James I-Beam track saves the cost of special curves. The track may be quickly and easily bent to any curve while it is being put up in the barn—heat is not required to do the bending. As several curves are often necessary in a barn, and as these curves cost several dollars apiece when ordinary flange track is purchased, this saving is no small item; and is a very big one if the track is for a round barn.

Many litter carriers use a track that is not at all adapted to the litter carrier. A track that is flat has but little strength vertically.

When used outside the barn, snow and sleet accumulate on the flat surface, blocking the carrier wheels. Before the carrier can be used outside, the snow or ice must be cleared from the track by melting or scraping it off—and this is no easy task, for the track is up high. Inside the barn, a flat track allows the dirt to accumulate.

The James Track is different. Its narrow tread affords no place for snow or sleet or dirt to collect—no sleet storm will put it out of use just when you need it most, in the disagreeable weather.

The narrow tread of the James track offers little resistance to the travellers; there being little friction surface, the carrier runs easily.

Track being one piece cannot spread and bind the tracker wheels.

The depth of the track and its heavy flanges at top and bottom make the James track stiff—it does not spring under heavy loads. This in part accounts for the ease with which big loads are handled on the James track. Any track without the necessary vertical strength will spring, making "low spots" in between hangers; and the carrier will push hard and jerkily.


The depth of the James track gives it long life because of the greater thickness of wearing surface; when the upper bead has worn thin, if it ever does, track can be turned edge for edge, the bottom bead forming new running surface. It will be giving satisfactory service many years after ordinary flat track has gone to the junk pile.

In fact, James track meets every condition required of a litter carrier equipment in any barn; it may be hung high or low, and run wherever there is room for the tub to pass.

The shape of the track is something like that of a railroad rail and for just the same reason. When the first railroad was constructed, a flat track was used, and soon abandoned for the present shape, in order to secure greater strength, longer wear and an even running surface.

It is heavy at the points of greatest strain. The weight on top puts the compression strain where the track is heavy; and the pulling strain where the track is just as strong. The compression strain and the pulling strain neutralize each other at the center of the track—less strength is required there, and hence that part of the track is made lighter. Every particle of metal helps to support the load, and the James track is therefore many times stronger than other types of track of equal weight.

Made of high carbon steel, same as a railroad rail; two inches deep; is easily put together with the channel steel splice bars and $\frac{7}{16}$ in. bolts—the track will not come apart and the joints will not give or sag. Holes in the track are two inches apart on centers.

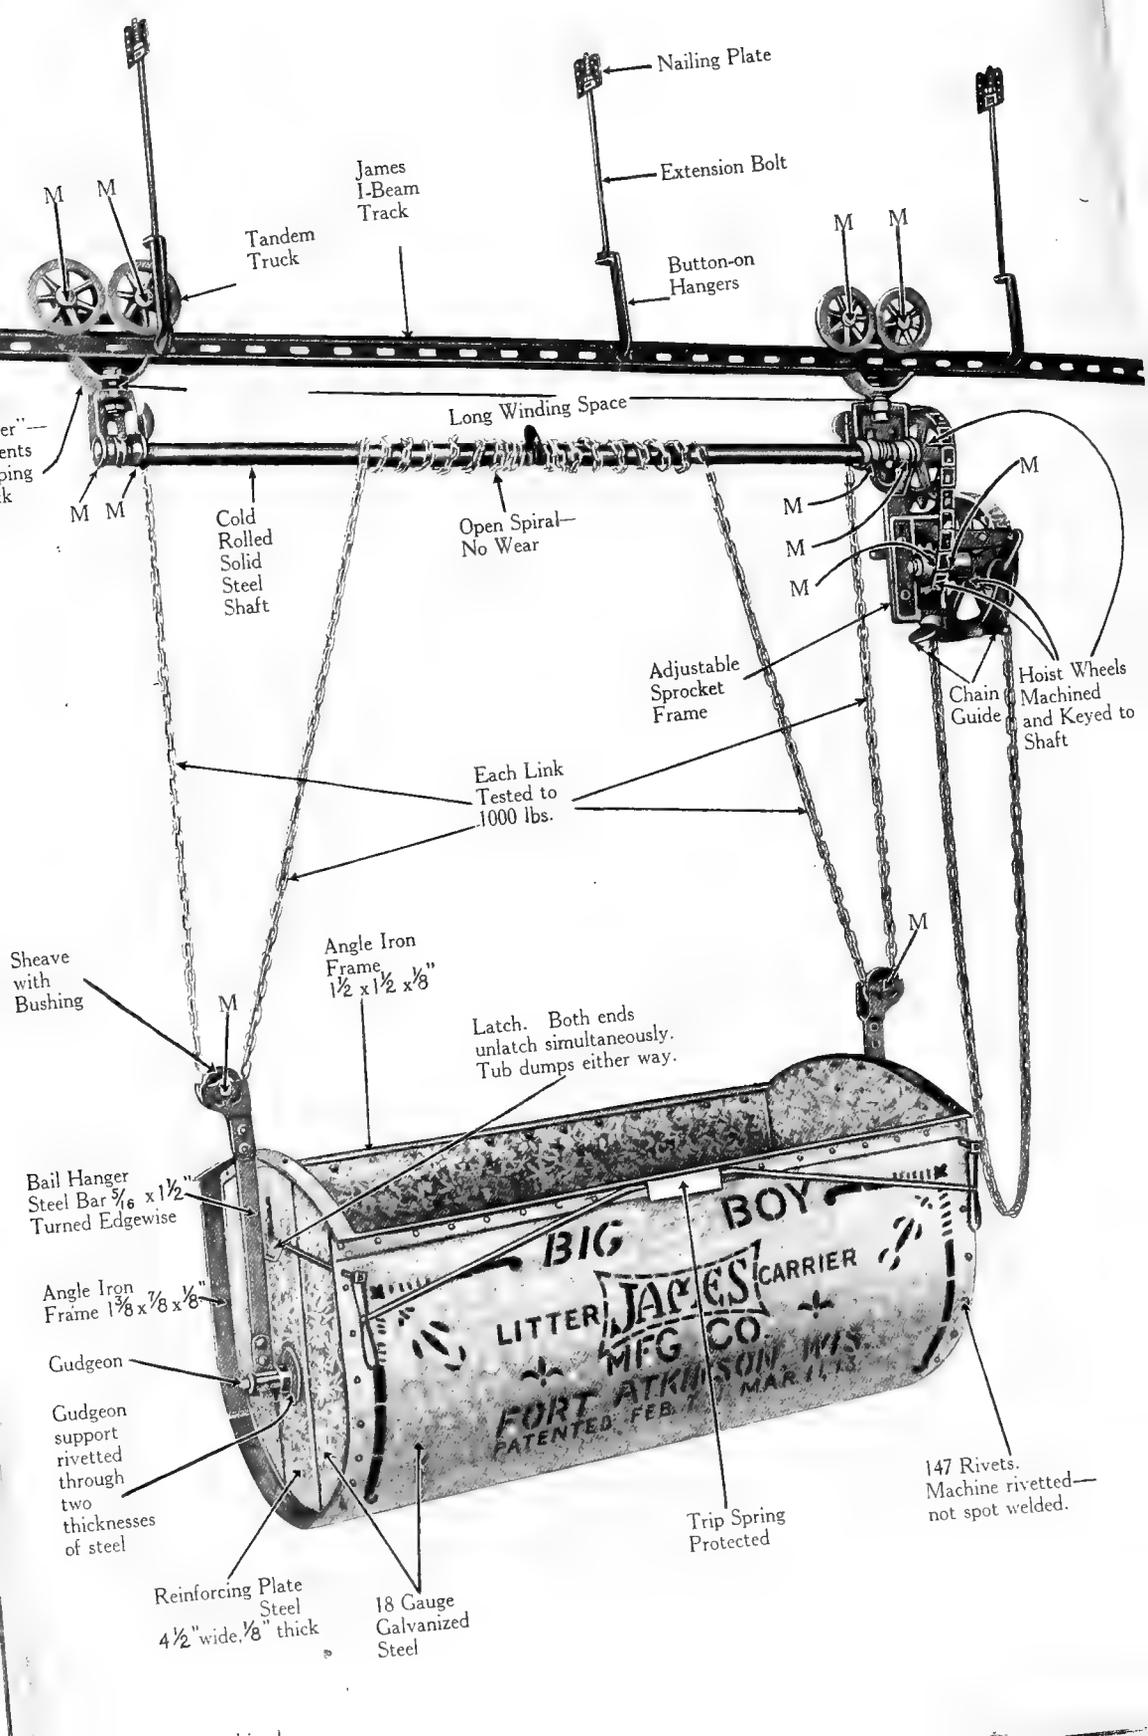

Nailing Plate

Extension Bolt

Button-on Hangers

Tandem Truck

James I-Beam Track

Long Winding Space

Cold Rolled Solid Steel Shaft

Open Spiral—No Wear

Adjustable Sprocket Frame

Hoist Wheels Machined and Keyed to Shaft

Each Link Tested to 1000 lbs.

Angle Iron Frame $1\frac{1}{2} \times 1\frac{1}{2} \times \frac{1}{8}$ "

Latch. Both ends unlatch simultaneously. Tub dumps either way.

Sheave with Bushing

Bail Hanger Steel Bar $\frac{3}{16} \times 1\frac{1}{2}$ " Turned Edgewise

Angle Iron Frame $1\frac{1}{8} \times \frac{1}{8} \times \frac{1}{8}$ "

Gudgeon

Gudgeon support rivetted through two thicknesses of steel

Reinforcing Plate Steel $4\frac{1}{2}$ " wide, $\frac{1}{8}$ " thick

18 Gauge Galvanized Steel

Trip Spring Protected

147 Rivets. Machine rivetted—not spot welded.

BIG BOY LITTER CARRIER
JAMES MFG CO.
FORT ATKINSON, WIS.
PATENTED FEB. 7, 1911 MAR. 11, 1913

James Track Hangers

(PATENTED)

We call them the "button-on" hangers, because of the peculiar shape which does away with the use of bolts and nuts for attaching the hangers to the track.

In putting up the track, the hangers "button on"—you put the button of the hanger through the hole in the track, slip the nailing plate through hole in the hanger, turn to position desired and fasten to joist or ceiling. (See Figs. 1, 2 and 3, page 194.)




Nailing plates (Fig. 3) or nailing plates with extension bolts (Fig. 5) are used for attaching to joists. If the barn is ceiled, ceiling plates with extension bolts (Fig. 4) of proper length are used with the hangers.


For the "Big Boy," the Combination Carrier, the Feed Carrier and the Milk Can Carrier, but the one style of hanger is required. Various lengths of extension bolts make it easy to drop the track any distance from the ceiling. And with either nailing plates or ceiling plates, it is a simple matter to level the track perfectly. No bolts being used in attaching hangers to the track, there are no nuts to rattle loose or come off—the track is held firmly.

STOP BLOCK: There is no extra cost for special stop blocks, none being required. Any hanger inserted on the opposite side of the track from the other hangers acts as a stop block, as well as supporting the track. The stop block, being "buttoned on," cannot work loose—making it impossible for the carrier to run off the end of the track.

Made of best malleable iron—they will not break.

Hangers should be used not more than 32 inches apart.

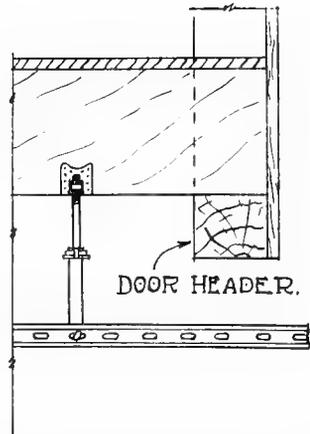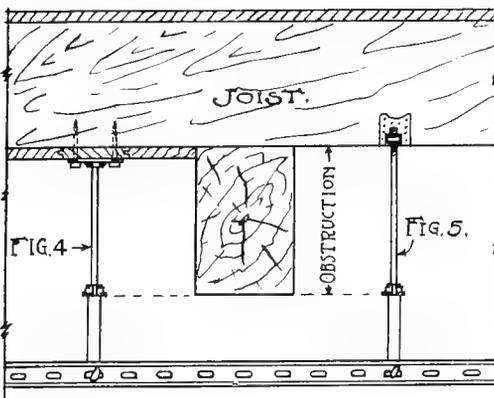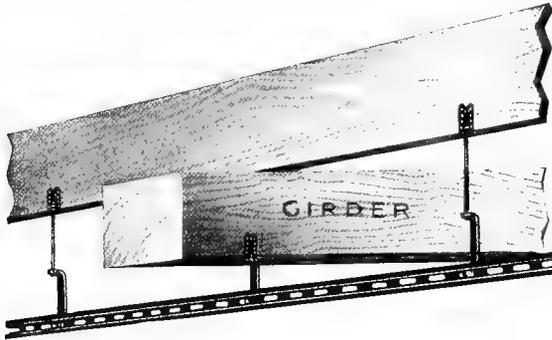

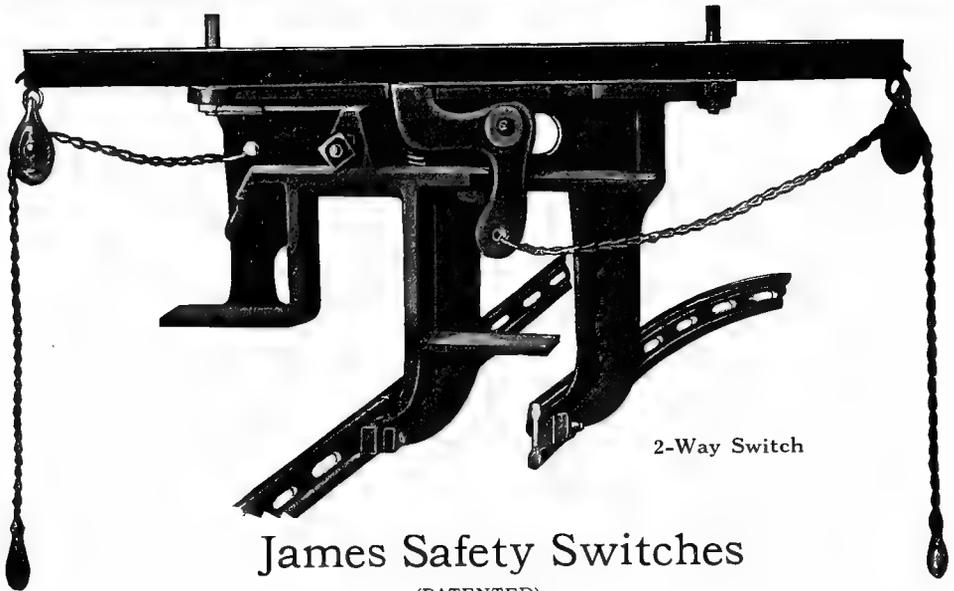

2-Way Switch


James Safety Switches

(PATENTED)

Anyone who has had experience with the unsatisfactory devices used in the past for transferring a carrier from one section of track to another section, will appreciate the James Safety Switch.

It can be operated conveniently from below, no matter how high the track is hung; a pull on the chain unlocks the switch and transfers to the other track, at the same time setting stop blocks across the open ends; there is never any possibility of a James Carrier running off the track, for a projection on the switch arm blocks the open tracks. When the pull on the chain is released, the switch automatically locks in place.

The James Safety Switch is the simplest, surest and easiest in operation; being constructed of best iron, it is strong and durable. Switches are reversible, and either two-way or three-way switches are furnished; both operate in the same manner.

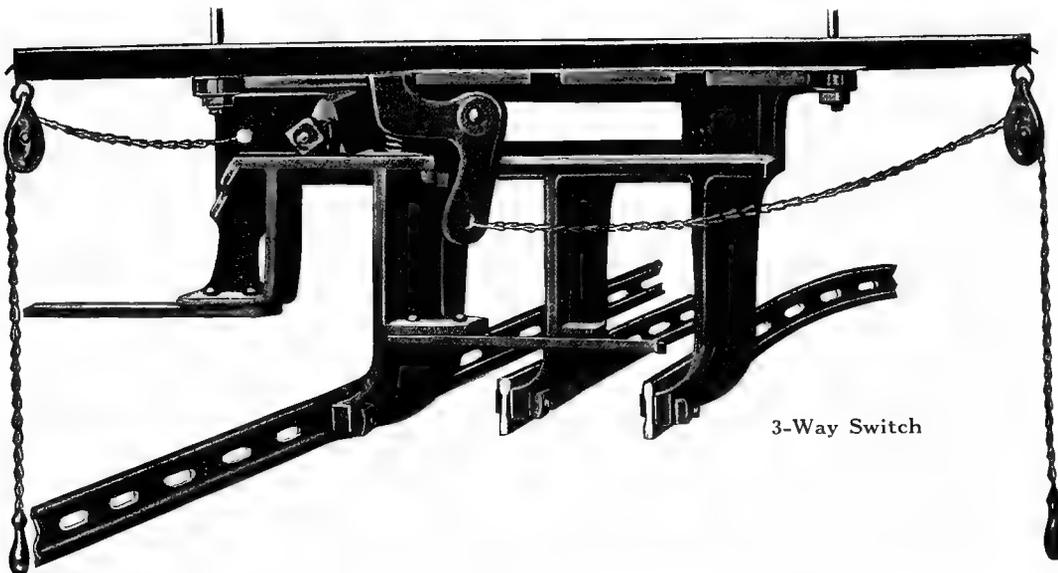


3-Way Switch

Switches for Combination Carrier

(PATENTED)



Either Two-way or Three-way switches are furnished, both operating as described on page 198.

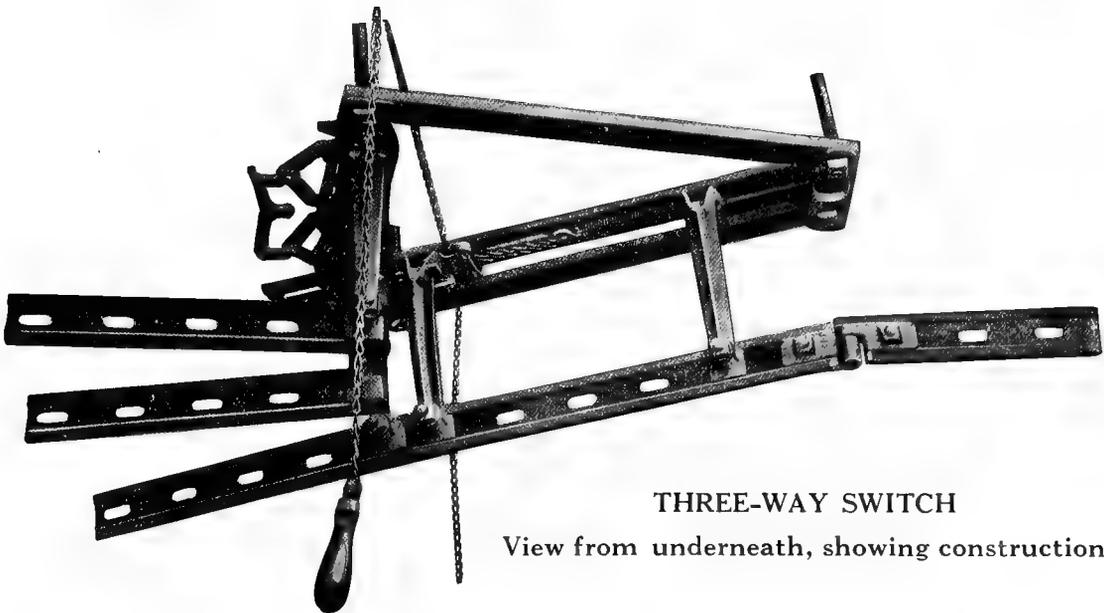


THREE-WAY SWITCH

View from underneath, showing construction





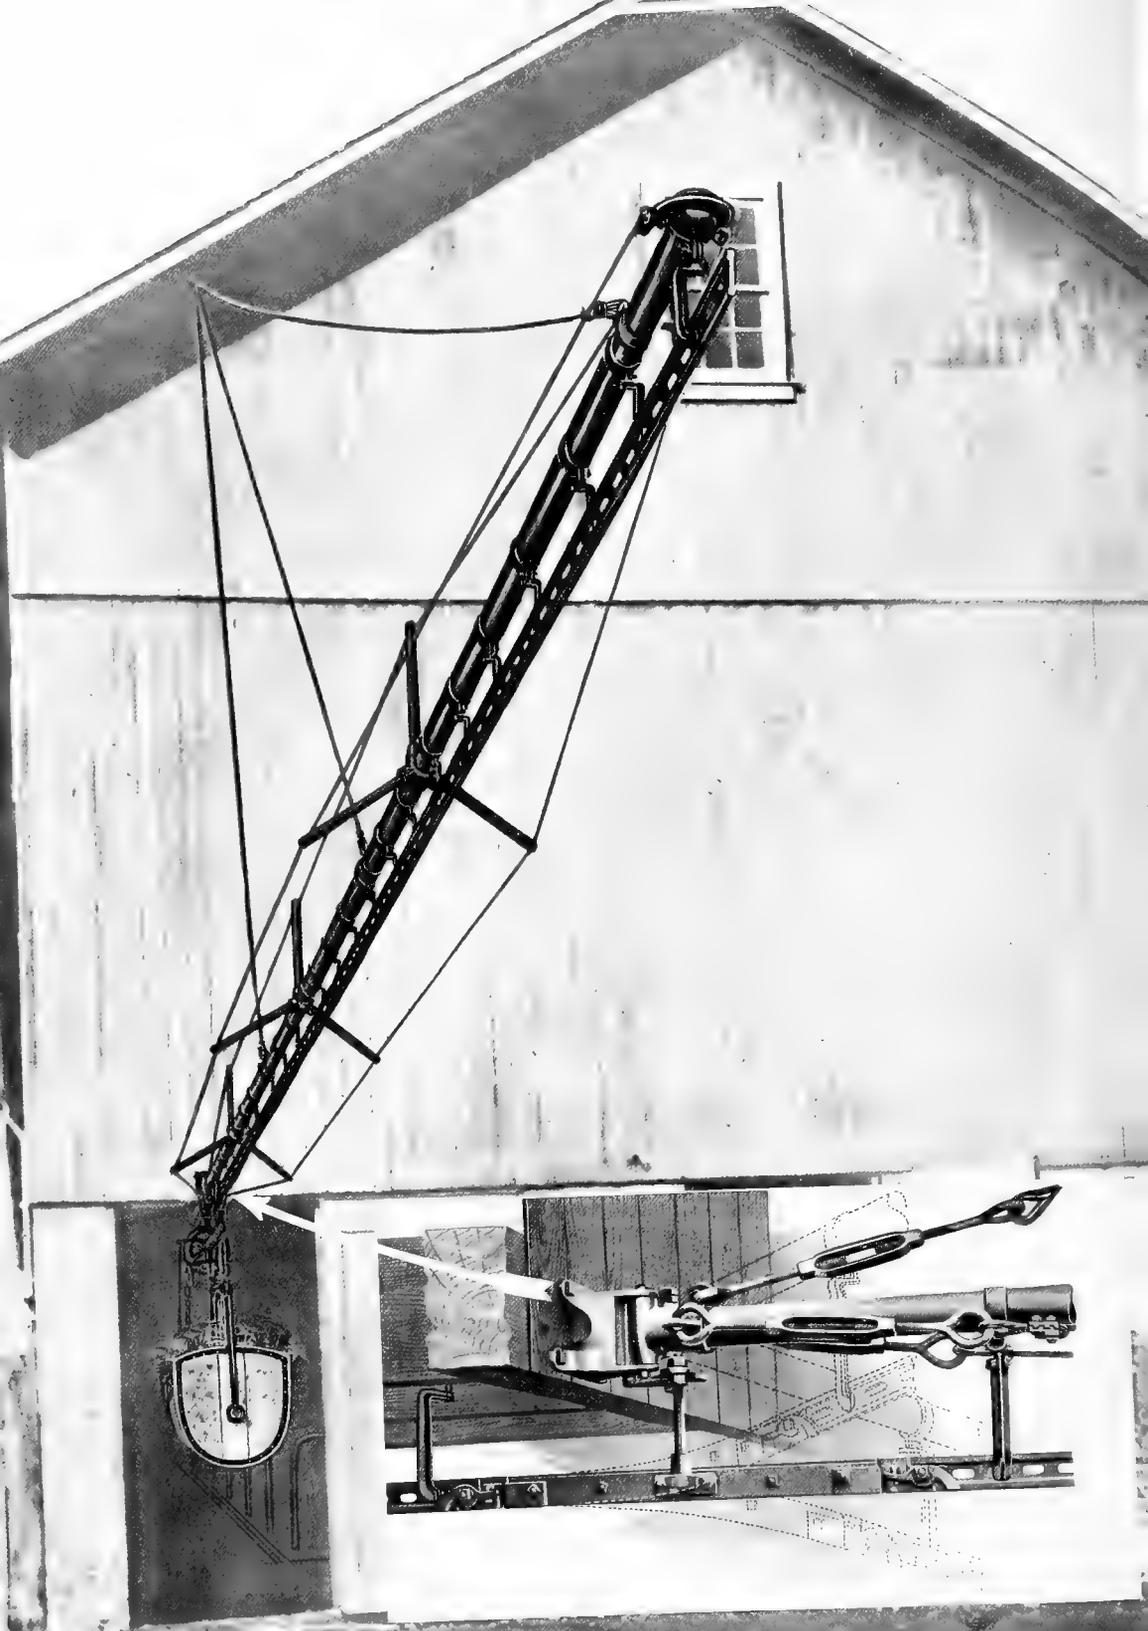

James Swinging Crane

James Swinging Steel Crane

The James swinging steel crane is the most satisfactory method of supporting the track outside the barn. It leaves the yard entirely clear, there being no supporting posts to interfere with the use of the yard, or to cause injury to horses or cattle; nor is there any lumber to rot and break. It keeps the yard next to the barn free from manure, because when not convenient to dump on to spreader or wagon, carrier can be dumped on an emergency pile some distance from the barn.

The carrier track can be extended beyond the swinging crane, if desired, by the use of the steel arch support shown on pages 205 and 206, or a wood support.

The carrier will pass over the flexible track section readily, even when the crane is swung as much as 30 or 35 degrees to either side from the direct line of carrier track leading to crane; and hence make possible a dumping area eight or ten times greater than the post supported track of the same length, should it be necessary to allow manure to accumulate.

When necessary to drive close to the barn with a load of hay, the crane may be swung against the side of the building either to the right or to the left where it is out of the way.

The length of crane that may be used, if suspended from the barn itself, is dependent on the height of the building. It should usually not exceed two and a half times the distance from the top of the door to the point where the eye bolt holding the supporting cable is attached.

For instance, if the distance from the top of the door to the plate on which the rafters rest and which holds the eye-bolt is 14 feet, the crane should not exceed 35 feet; if this distance is 16 feet, a 40-ft. crane may be used, etc. In but very few cases would we recommend a crane over 40 feet in length.

By erecting the proper supports, it is usually possible to secure the advantage of the swinging crane, even though the building be low or other conditions apparently prevent. An example is shown on page 204. If you want to use a crane and do not know how to support it on your barn, write us and our Service Department will be glad to help you solve the problem.

The track inside the barn and the track supported from the crane are connected by the removable flexible section shown on page 202.

SPECIFICATIONS

Carrier cranes being subject to considerable shock, unusual care has been taken to give the James crane great rigidity to prevent buckling. The lateral and vertical strength is furnished by the horizontal and vertical trussed stiffening struts set at frequent intervals. The crane is designed to carry 800 pounds when the load is at the maximum radius of 40 feet.

Galvanized pipe (not merely painted), 2 $\frac{3}{8}$ -in. O. D., connected by heavy malleable splice clamps; truss braces of 1 $\frac{5}{8}$ -in. O.D. pipe. Truss struts of 1 $\frac{5}{8}$ -in. O.D. pipe placed 120 degrees to each other. Three side truss cables $\frac{5}{16}$ -in. in diameter with $\frac{1}{2}$ -in. turn-buckles; size and number of guy cables vary according to length of crane; with the 40-ft. crane four $\frac{5}{16}$ -in. and one $\frac{3}{8}$ in. cables are furnished, with necessary cable clips and clamps.



The hinge is of best malleable iron with 1-in. diameter steel bolt.

Hook bolt, 1 inch thick, with iron washer, special design, to prevent cables from unhooking, for attaching upper end of guy cables to barn.


Removable Flexible Track Section

Each swinging crane is furnished with a section of flexible track which is located directly under the crane hinge. The flexible track is built up from 14 pieces of tempered flat spring steel set on edge, carefully machined and assembled. All internal parts thoroughly coated with flake graphite and oil.

This flexible track is eccentrically hung from crane hinge thus avoiding buckling.

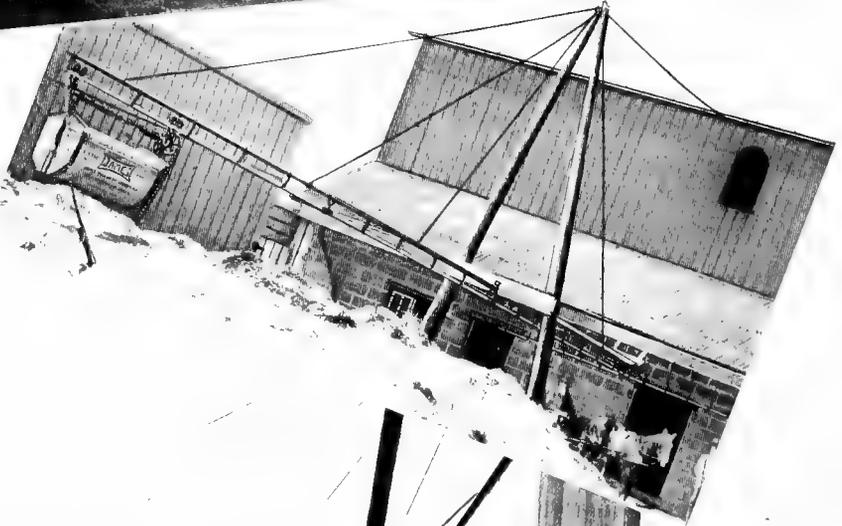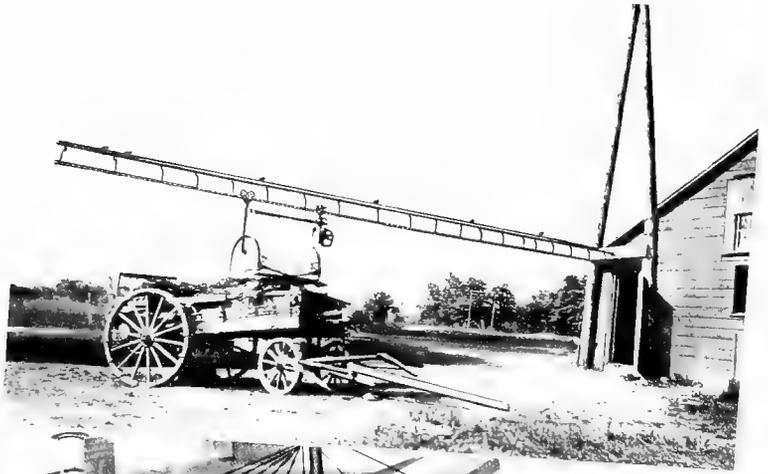



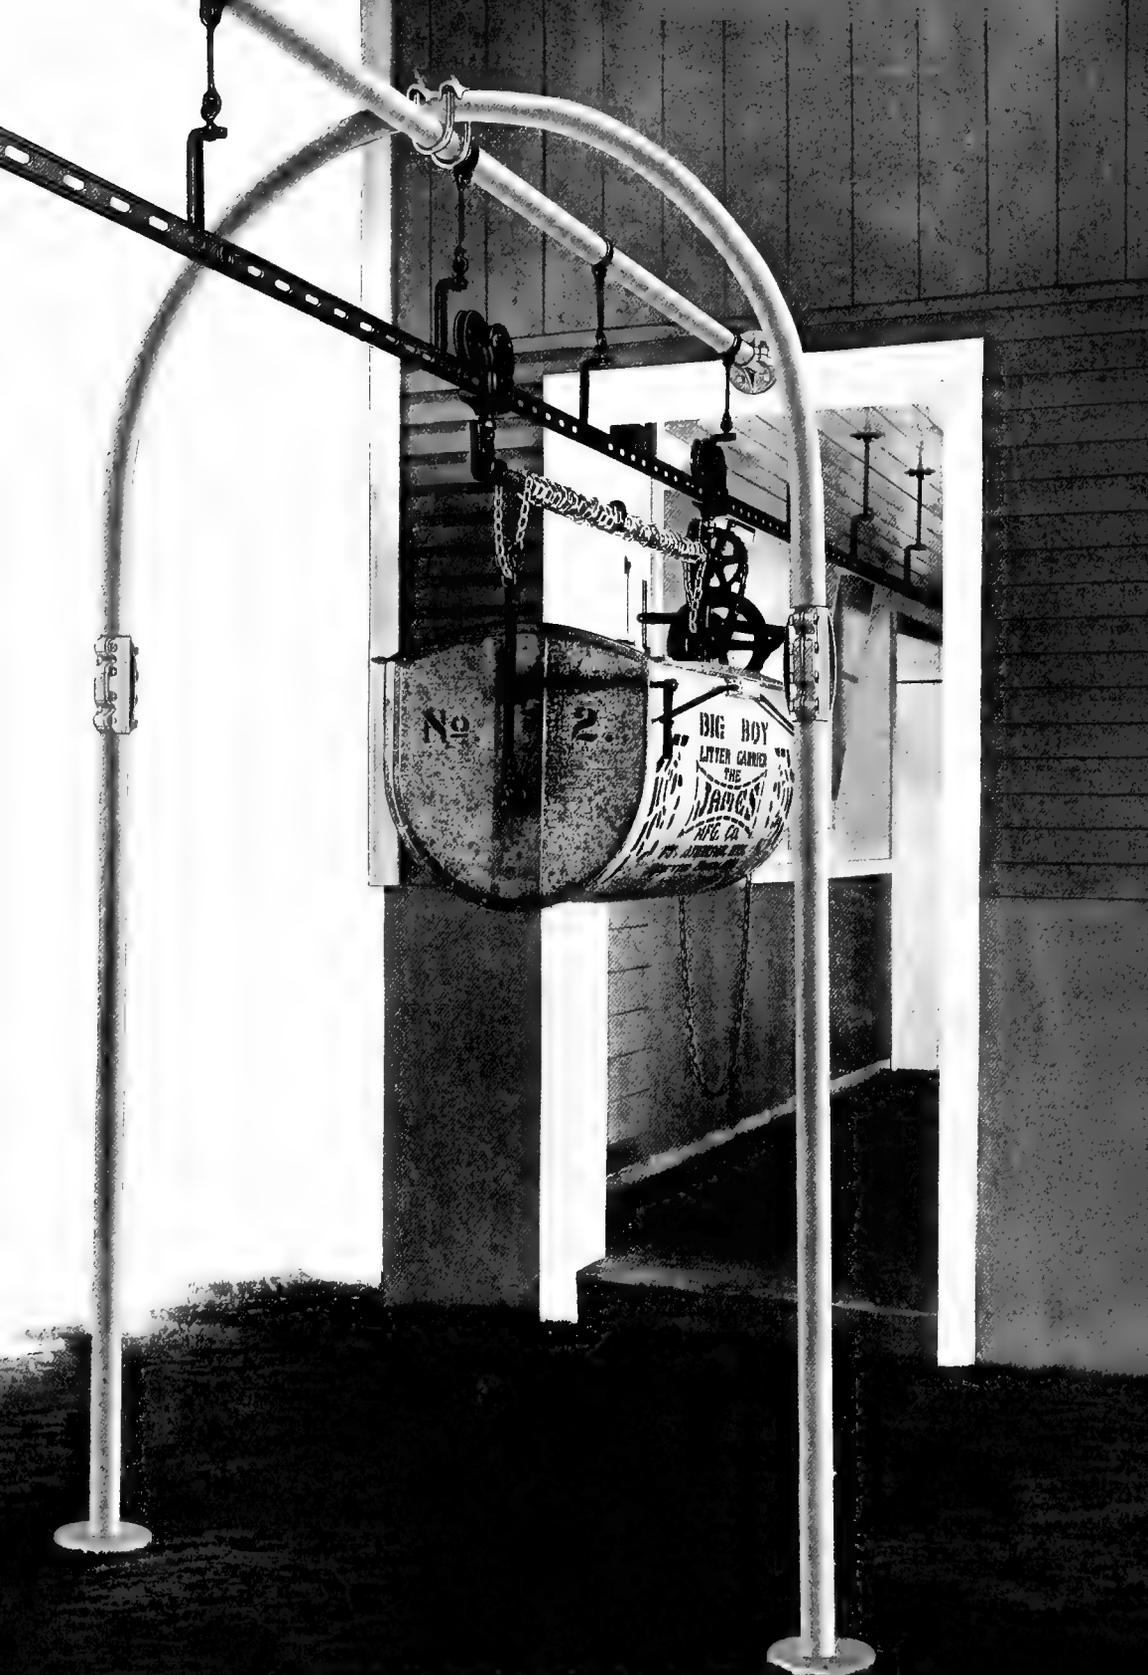

James Carrier Outside Support.

Supports for James Track Outside the Barn

(PATENTED)

STEEL ARCH SUPPORT: As shown on page 206. Constructed of $2\frac{3}{8}$ -in. O. D. pipe, galvanized, with malleable fittings and $\frac{1}{2}$ -in. U-bolts on top and $\frac{7}{16}$ -in. bolts in coupling clamps. The uprights in each pair of posts are five feet apart, on centers set in concrete. Very satisfactory track support. Furnished any height.

Supports Alongside the Barn

Sometimes it happens that it is necessary to carry the I-Beam track along the outside of the barn.

If a Combination Carrier is being used, it may not be possible to run the rod track out into the yard directly from the door; in such case the track can be supported from the side of the barn, carrying the I-Beam track to a point from which the rod track can be run out as desired.

Or in some barns where the rows of cows run crosswise, it may be desirable to bring the track out of one door and in to another in order to reach certain parts of the stable—especially if it happens that alleys are too narrow to permit the passage of the carrier.


Track supported from the side of the barn may also be used in cases where a swinging crane cannot be extended from the door itself, some other building, for instance, being in the way. It is easy to carry the I-Beam track to a point from which a crane may be swung.


This track support is furnished in two styles.

STEEL SUPPORT: Made in two sizes. One, constructed of $2\frac{3}{8}$ -in. O. D. galvanized pipe, the brackets which hold the supporting rods being fastened to the barn with $\frac{3}{8}$ -in. lag screws. The supporting rods are $\frac{1}{2}$ -in. diameter. Struts are $2\frac{3}{8}$ -in. O. D. galvanized pipe, fastened to the barn with malleable flanges and $\frac{1}{2}$ -in. lag screws. The other, made of $1\frac{7}{8}$ -in. O. D. pipe, painted, with $\frac{7}{16}$ -in. lag screws.

No threaded fittings are used, the pipe frame being put together with clamps of best malleable. The entire structure can be erected with no tools excepting a hammer and a wrench. Blue prints showing details and prices furnished on application.

WOOD SUPPORT: A similar structure can be built of wood, in which case we furnish only the supporting rods of $\frac{1}{2}$ in. diameter, with brackets and lag screws for attaching to barn and the wood frame.

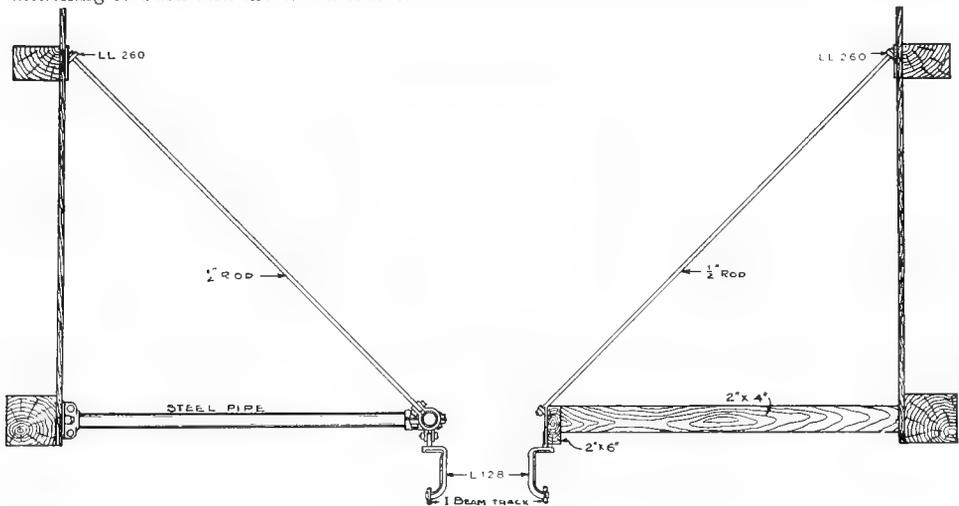

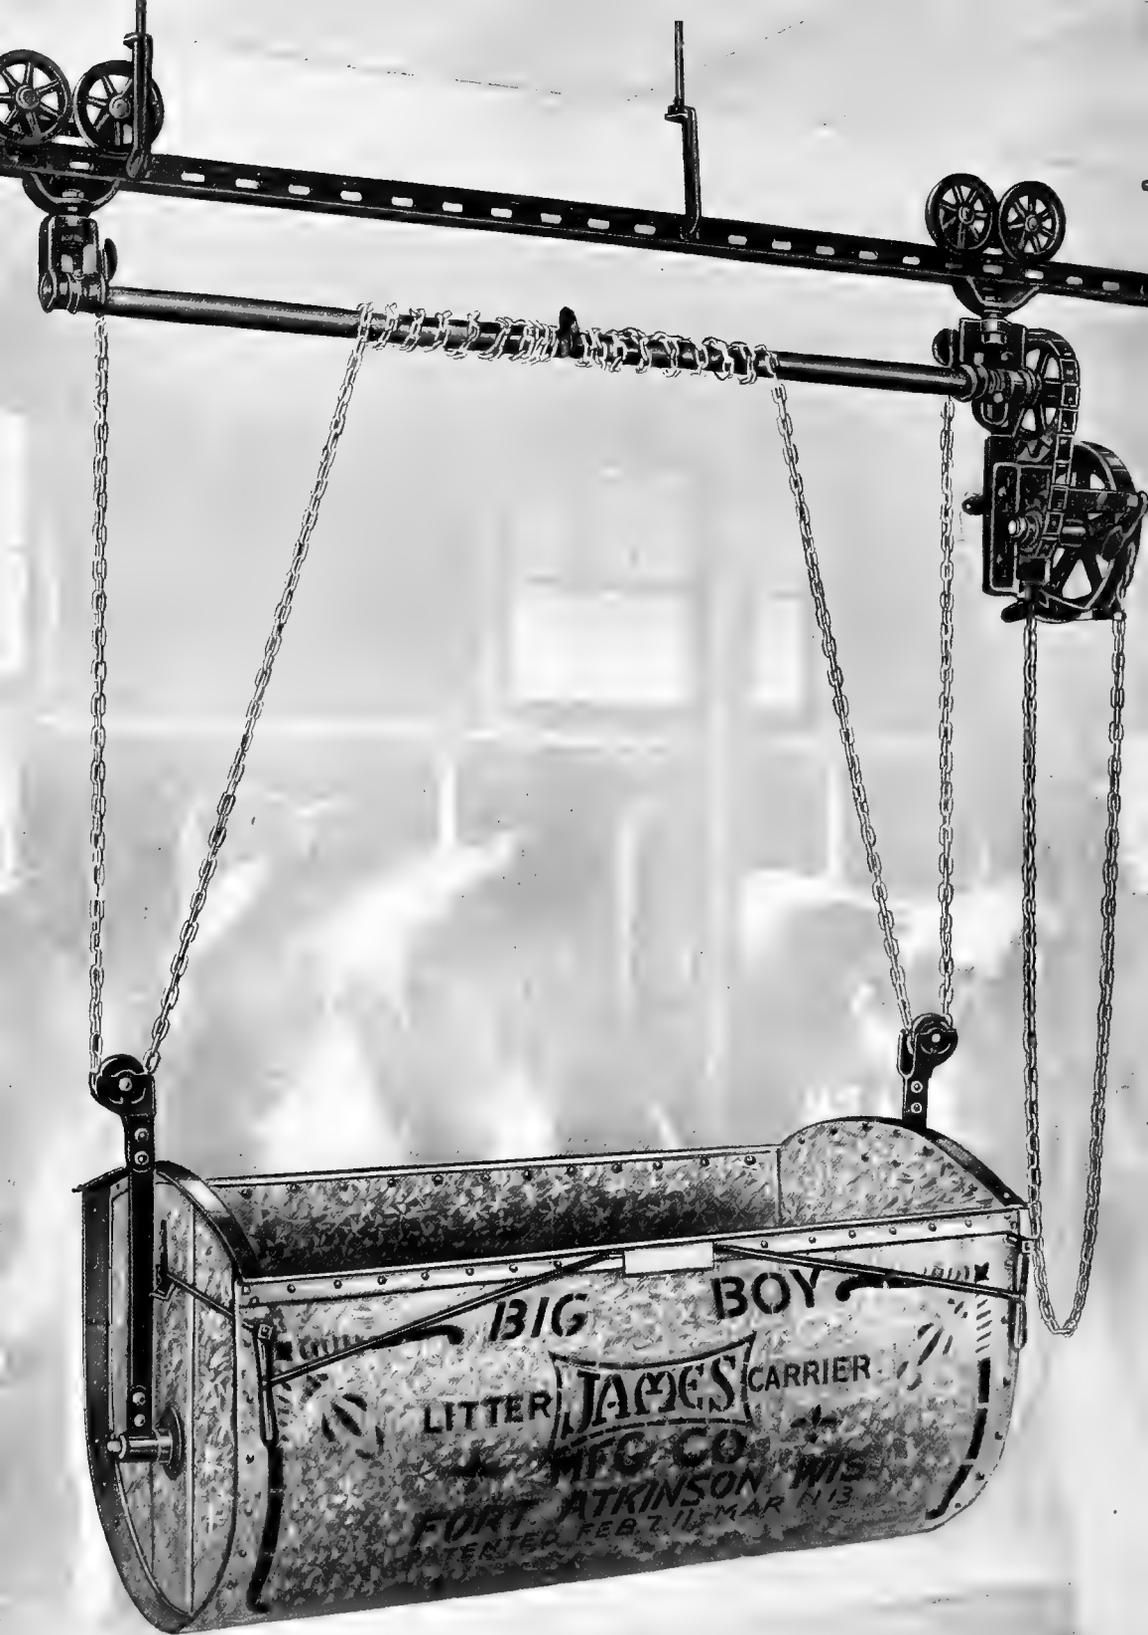

The "Big Boy" Litter Carrier

(PATENTED)

SPECIFICATIONS

TUB: Constructed of eighteen-gauge galvanized sheet steel, built on a framework of angle iron; angle iron at side edges being $1\frac{1}{2} \times 1\frac{1}{2} \times \frac{1}{8}$ in.; at the ends $\frac{7}{8} \times 1\frac{3}{8} \times \frac{1}{8}$ in.; end of tub reinforced with steel plate $4\frac{1}{2} \times \frac{1}{8}$ in. Well riveted, all rivets sherardized and are $\frac{3}{16}$ in., except corner rivets, which are $\frac{1}{4}$ in. Gudgeon support is riveted to the two thicknesses of steel on end of tub. Tub is self-cleaning. For complete information see page 187.

PERFECT CONTROL CLUTCH AND BRAKE: Of malleable and bar steel. For explanation of operation see page 189.

HOIST: Chain and sprocket type. Made of best iron and steel. The frame carrying the lower sprocket is adjustable to take up the slack, thus making it possible to overcome any wear. So geared as to make possible the raising of heavy loads in the shortest time without undue effort. (See page 189.)

CHAIN GUIDES: Malleable. Prevent hand chain running off the hoist wheel.

SHAFT: Of $1\frac{1}{4}$ -in. cold rolled solid steel shafting, same as used in factories for line shafting. (Page 193.)

LIFTING CHAIN: Heavy straight link chain, tested for five times the load it will have to carry. Three point suspension: in winding up forms an open spiral, preventing rubbing and wear. (Page 193.)

The distance from the top of the tracker wheels to the bottom of the Big Boy No. 2 Tub when raised is 43 inches; when lowered to full length of lifting chain the distance is 8 feet 8 inches.

TRACKER WHEELS: Made of gray iron; $4\frac{3}{4}$ in. in diameter, mounted in swiveled tracker wheel frames. Travelers arranged tandem. Tracker wheel axle of steel with oil pocket; journal machined and surfaced. (See pages 188-189.)

TRACKER WHEEL FRAME: So constructed that wheels cannot jump the track. May be removed only by hand. (Pages 188-189.)

LATCH AND TRIP: Latches at each end of tub lock and unlock simultaneously. Protected against clogging with manure. Latch trip operated from either end.

BAIL HANGERS: Heavy flat steel bars $\frac{5}{16} \times 1\frac{1}{2}$ in., edgewise to the tub. Malleable fittings and sheave. (See page 187.)

BEARINGS: All bearings that get wear in operation are machined to assure accurate fit and smooth surface; this reduces friction, lessens wear, increases ease of operation and adds greatly to life of carrier. Bearings that are left merely cored, as they come from the foundry, are covered with sand roughness, which cuts into metal like so much emery. Hence the great importance of machined bearings. (See page 196.)

CAPACITY: Tub No. 2 is 45 in. long, 24 in. deep, 24 in. wide, and holds approximately 12 bushels coarse manure.

WEIGHT: Tub No. 2 approximately 200 pounds.



THE
FEED **JAMES** CAR
MFG. CO
FT. ATKINSON, WIS.

The James Feed Car

(PATENTED)

SPECIFICATIONS

TUB: Constructed of selected lumber; bottom and ends 20-gauge galvanized steel, the design making it easy to shovel. Corners bound with corner iron.

SIZE: Extreme length 68 inches, width 26 inches, height 24 inches.

PERFECT CONTROL CLUTCH AND BRAKE: Of malleable and bar steel. For explanation of operation see page 189.

HOIST: Chain and sprocket type. Made of the best iron and steel. The frame carrying the lower sprocket is adjustable to take up the slack, thus making it possible to overcome any wear. So geared as to make possible the raising of heavy loads in the shortest time without undue effort. (See page 189.)

CHAIN GUIDES: Malleable. Prevent hand chains running off the hoist wheel.

SHAFT: Of 1¼-in. cold rolled solid steel shafting, same as used in factories for line shafting. (Page 193.)

LIFTING CHAIN: Heavy straight link chain, tested for five times the load it will have to carry. Three point suspension; in winding up forms an open spiral preventing rubbing and wear. (Page 193.)

TRACKER WHEELS: Made of gray iron; 4¾ in. in diameter mounted in swiveled tracker wheel frames. Travelers arranged tandem. Tracker wheel axle of steel with oil pocket; journal machined and surfaced. (See pages 188-189.)

TRACKER WHEEL FRAME: So constructed that wheels cannot jump the track. May be removed only by hand. (Pages 188-189.)

BAIL: Heavy channel steel. Extends nearly to bottom of tub. So shaped as to permit the greatest freedom when shoveling.

BEARINGS: All bearings that get wear in operation are machined, to assure accurate fit and smooth surface; this reduces friction, lessens wear, increases ease of operation and adds greatly to life of carrier. Bearings that are left merely cored, as they come from the foundry, are covered with sand roughness, which cuts into metal like so much emery. Hence the great importance of machined bearings. (See page 196.)

CAPACITY: Approximately 16 bushels.

WEIGHT: 250 pounds.



James Milk Can Carrier

Milk Can Carrier

(PATENTED)

Where the James I-Beam Track is already installed in the barn, the Milk Can Carrier outfit costs but very little, the only additional cost being for the carrier itself with perhaps a little additional track to reach the Milk House.

The James Milk Can Carrier is a distinct improvement over the platform carrier from which cans not only slip off in going around a curve but with which it is necessary to lift cans on and off.

The James Carrier may be lowered to the floor and the hooks quickly released from the can handles. The friction clutch makes it possible to lower and hold the cans within an inch of the floor, preventing them from coming in contact with any litter and keeping the cans clean.

SPECIFICATIONS

PERFECT CONTROL CLUTCH AND BRAKE: Of malleable and bar steel.
For explanation of operation see page 189.

HOIST: Because of the lighter load handled by the Milk Can Carrier the direct type hoist is used. (See page 189.)

CHAIN GUIDES: Malleable. Prevent hand chain running off the hoist wheel.

SHAFT: Of 1¼-in. cold rolled solid steel shafting, same as used in factories for line shafting. (Page 193.)

LIFTING CHAIN: Heavy straight link chain, tested for five times the load it will have to carry. Three point suspension; in winding up forms an open spiral preventing rubbing and wear. (Page 193.)

TRACKER WHEELS: Made of gray iron; 4¾ in. in diameter, mounted in swiveled tracker wheel frames. Travelers arranged tandem. Tracker wheel axle of steel with oil pocket; journal machined and surfaced. (See pages 188-189.)


TRACKER WHEEL FRAME: So constructed that wheels cannot jump the track.
May be removed only by hand. (Pages 188-189.)

BEARINGS: All bearings that get wear in operation are machined, to assure accurate fit and smooth surface; this reduces friction, lessens wear, increases ease of operation and adds greatly to life of carrier. Bearings that are left merely cored, as they come from foundry, are covered with sand roughness, which cuts into metal like so much emery. Hence the great importance of machined bearings. (See page 196.)

Instead of a suspended tub or platform the milk cans are suspended from a carbon steel pipe, fitted with a sheave on each end, through which runs the lifting chains that wind over the steel shaft. Suspended from the pipe are steel straps with hooks which grapple the milk can handles. Sufficient distance between these supports is provided to admit the use of a strainer; the cans need not be detached, from the time they are taken empty from the milk-house until they are returned.

CAPACITY: Will handle either 1, 2 or 3 milk cans.

WEIGHT: Approximately 110 pounds.

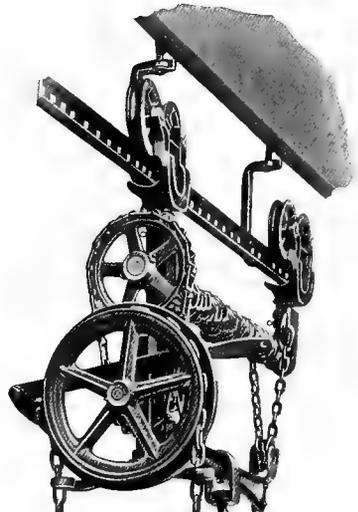

James
Swill
Carrier



James Swill Carrier

SPECIFICATIONS

Capacity of can 70 gallons.


Outside dimensions 28 inches diameter by 32 inches high.

The can is constructed of 18-gauge galvanized steel, lock seamed and well riveted to a framework of angle and channel iron. The top is reinforced with $\frac{7}{8}$ -in. x $1\frac{3}{8}$ -in. x $\frac{1}{8}$ -in. angle iron, bottom rim with a $1\frac{1}{2}$ -in. x $\frac{3}{4}$ -in. x $\frac{1}{8}$ -in. channel iron. Two pieces of $1\frac{1}{4}$ -in. x $1\frac{1}{4}$ -in. x $\frac{3}{16}$ -in. tee iron is placed horizontally under bottom sheet, well riveted to channel, giving great supporting strength. A heavy galvanized collar is riveted and soldered to the can and fitted with a 3-in. gate.

Bail hangers are heavy galvanized steel plate riveted to barrel with 20 sherrardized rivets; seams and rivet heads are well soldered on inside.

HOIST: The Big Boy hoist is furnished (see page 289) fitted with extra strong pipe, swivel and hook, allowing swill to be delivered on either side of feeding alley.



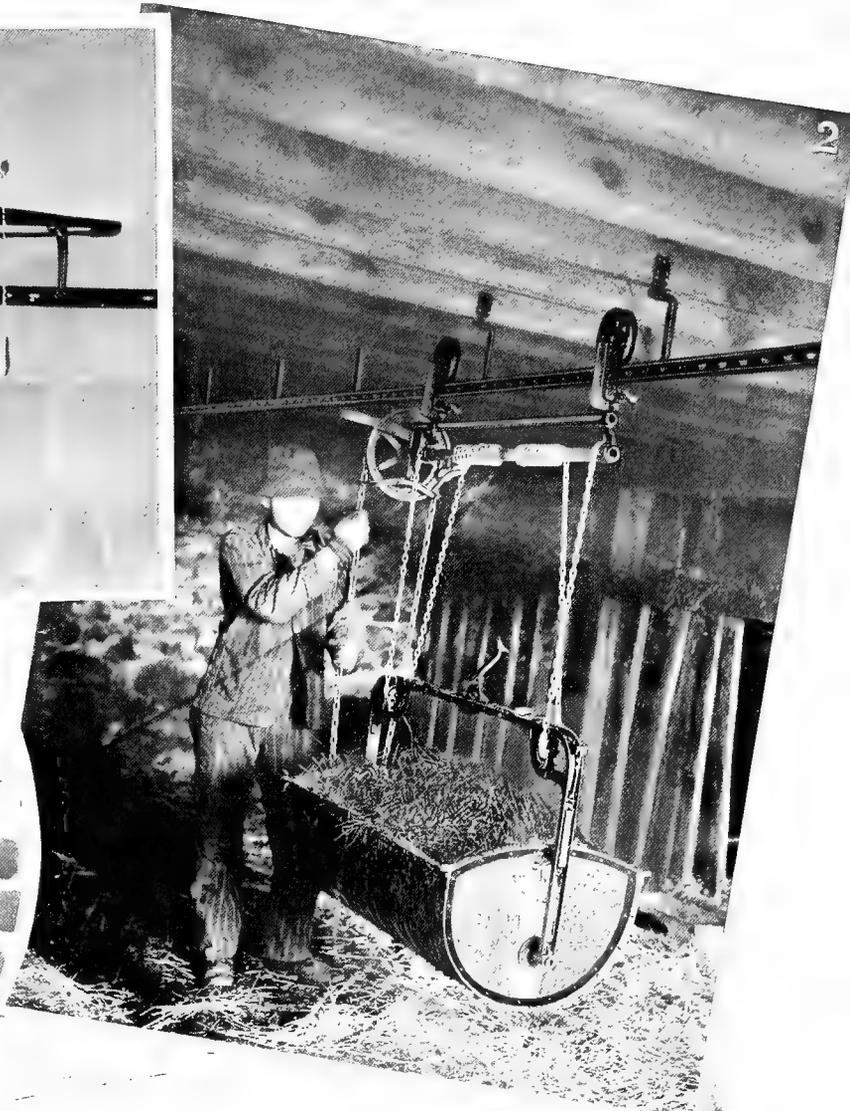



Machine for on Hill Top Covered Ditch Farm Wheeling, W. Va.



A Yard Full



Craft Bros. Farm Eden, W. Va.

The James Combination Carrier

(For I-Beam and Rod Track)

This carrier has back of it all the quality, reputation and experience that have made James Carriers and James Equipment famous and successful.

For the smaller barns, it is one of the most valuable and most sensible labor savers ever put on the market, and is proving a big winner. It is not, however, adapted to the larger barns, say fifteen head of stock or more, because the capacity of the tub is limited by the strength of the anchorage of the rod track.

The James Combination Carrier has all the advantages of the I-Beam track inside the barn—the celebrated James track that can be bent to any curve without the use of heat, doing away with the expense for special curves; the “button-on” hangers that make the outfit easy to erect, a tub that can be quickly dropped to the floor for loading, and that “stays put” on the track while being filled—track can’t sag, hence the carrier moves only when you push it; and other features that make barn cleaning easy.

This carrier also has all the advantages of the rod track outside the barn. You can stand at the barn door, give the carrier a shove—it runs out, dumps at the desired point and returns automatically to the barn. Saves walking through the wet yard and snow.

The tub dumps to either side, giving you more dumping space and making it more convenient to dump into wagon or spreader. Latches at the ends of the tub lock and unlock simultaneously; work surely and easily; and are protected so they will not clog with manure.

The trip block which dumps the tub can be locked to the track at any desired point. When the trip strikes this block, the tub dumps to whichever side is loaded the heavier. An ingenious device makes the trip positive, so that dumping is certain.

Carrier returns automatically to the barn when empty.

The long life tub is the same in materials and construction as the “Big Boy” carrier tubs, described on page 187, the only difference being in size.

Heavy straight link lifting chain is used, this being strongest and best adapted to the purpose. It is attached to the center of the cold rolled, solid steel shaft, so that in winding up it forms a very open spiral, preventing rubbing and wear. No cable to wear out and break.

The carrier is very easy running because of the narrow tread on both the I-Beam track and the rod track, and because each tracker wheel contains eleven long, cold rolled steel bearings, making it almost frictionless.

Whether the carrier is on the rod track or on the I-Beam track, or passing from one to the other, it can’t jump off. The ingenious keeper makes that impossible. There is but one way to get it off the track and that is by deliberately lifting it off.

The direct hoist is used; so geared as to raise the load in the shortest time possible without undue effort.

The Absolute Control Clutch and Brake described on page 201 is a most important part of the Combination Carrier. Turn back to that page and learn its advantages.



COMBINATION
THE
JAMES' CARRIER

James Combination Litter Carrier

(PATENTED)

SPECIFICATIONS

TUB: Constructed of 18-gauge galvanized sheet steel. Built on a frame work of angle iron; angle iron at side edges being 1 x 1 x $\frac{1}{8}$ in.; at the ends 1 x 1 x $\frac{1}{8}$ in.; end of tub reinforced with steel plate $3\frac{1}{2}$ x $\frac{1}{8}$ in. Well riveted, all rivets galvanized and are $\frac{3}{16}$ in., except corner rivets, which are $\frac{1}{4}$ in. Gudgeon support is riveted to the two thicknesses of steel on end of tub. Tub is self-cleaning.

PERFECT CONTROL CLUTCH AND BRAKE: Of malleable and bar steel. For explanation of operation see page 189.

HOIST: Direct type; hoist wheel is 11 in. in diameter; raises tub quickly; made of best iron and steel.

CHAIN GUIDES: Malleable. Prevent hand chain running off hoist wheel.

SHAFT: $1\frac{1}{4}$ -in. cold rolled solid steel shafting, same as used in factories for line shafting. (See page 193.)

LIFTING CHAIN: Straight link chain, tested for several times the load it will have to carry. Three-point suspension; in winding up forms an open spiral, preventing rubbing and wear. (See page 193.)

The distance from the top of the tracker wheels to the bottom of the Combination Carrier Tub, when raised, is 44 inches; when lowered the distance is 8 feet.

TRACKER WHEELS: Made of gray iron. Large diameter. Mounted on swiveled tracker wheel frames. Tracker wheel axle of steel with eleven long cold rolled steel bearings.

TRACKER WHEEL FRAME AND KEEPER: So constructed that wheels can not jump the track whether on rod track, I-beam track or passing from one to the other. (See page 191.)

BAIL: Channel steel, reinforced by corner bail braces.


LATCH AND TRIP: Latches at both ends, locking and unlocking simultaneously. Tub dumps automatically when trip strikes the trip block; trip block, of malleable iron locked to cable with a set screw 1 x $\frac{1}{4}$ in., can be locked at any desired point on the track.

BEARINGS: All bearings that get wear in operation are machined, to assure accurate fit and smooth surface; this reduces friction, lessens wear, increases ease of operation and adds greatly to life of carrier. Bearings that are left merely cored, as they come from the foundry, are covered with sand roughness, which cuts into metal like so much emery. Hence the great importance of machined bearings. (See page 196.)

CAPACITY: Tub is 40 inches long, 22 inches wide, 16 inches deep, and measures approximately 5 bushels.

WEIGHT: Approximately 145 pounds.

No. 000000 rod track must be used with the combination carrier.

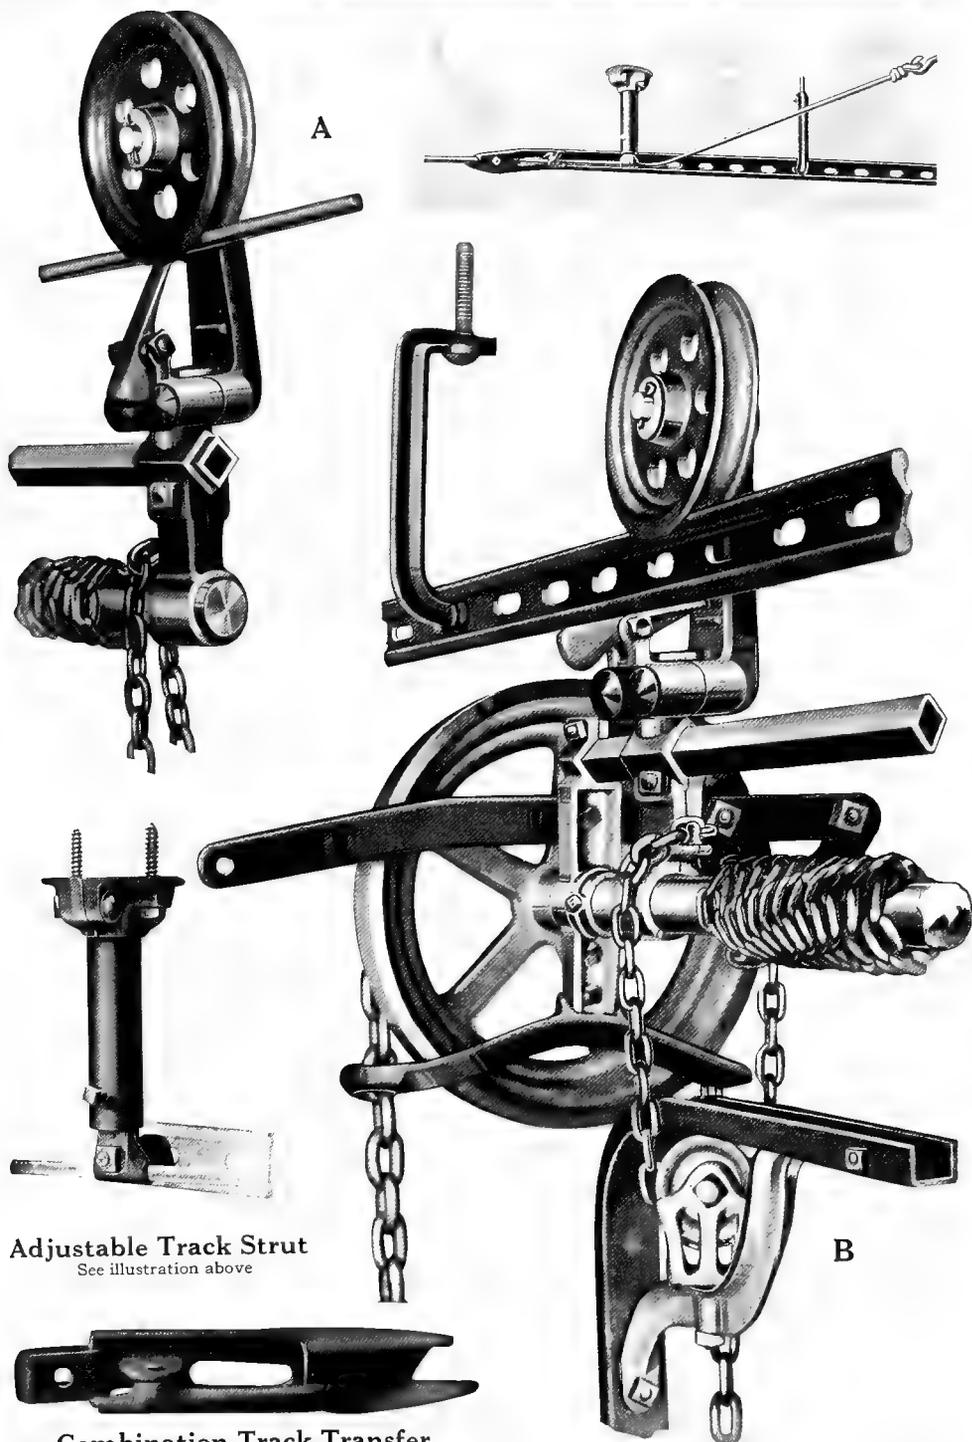

Adjustable Track Strut
See illustration above

Combination Track Transfer

Illustrations A and B show clearly the operation of the keeper which prevents jumping the track; the absolute control clutch and brake; and the easy running tracker wheels. The winding shaft is cold rolled, solid steel shafting.

James "Chore Boy" Carrier (For Rod Track)

While the demand is more and more for the James I-Beam Track Carrier, with a swinging crane, there is some call for moderate priced rod track carriers for use in small barns where only a few head of stock are to be cared for.

The James "Chore Boy" meets this need combining as it does all the desirable and essential features necessary for a rod track outfit at a moderate price.

By putting up the outer end of the track at the proper angle the carrier, when loaded, can be made to run out, dump its load at the desired point, and return automatically to the barn. A vigorous shove at the barn door is all that is required.

The tub of the carrier is dumped by means of a trip block, which can be placed at any desired point on the track. When the trip strikes this block it unlocks the tub, the tub dumping either way, according to which side is loaded the heavier. An ingenious device makes the trip positive, so that tub is always certain to dump. Tub is so shaped as to be self cleaning.

The "Chore Boy" cannot jump the track, being prevented by automatic keepers on the tracker wheels. The keeper, however, unlocks as it strikes a curve, allowing tracker wheel to swivel; the other wheel remaining on the track is locked rigid and parallel with the rod track, thus overcoming the tendency to run sideways and bind. This position is maintained until the wheel strikes the curve, then the keeper unlocks and allows the wheel to swivel.

Each tracker wheel contains ten long, cold rolled steel bearings, producing a bearing almost frictionless.

The bail is adjustable, so that the tub can be lowered or raised.

The carrier can be adjusted to take either a left or right hand curve, it being only necessary to lift the wheels from the track, one at a time, and swivel them around.

SPECIFICATIONS

STEEL END TUB: Of 18-gauge galvanized steel. Built on a frame work of angle iron, 1 x 1 x $\frac{1}{8}$ in. at side and end edges; end of tub reinforced steel plate $3\frac{1}{2}$ x $\frac{1}{8}$ in., well riveted, all rivets galvanized and are $\frac{3}{16}$ in. except corner rivets, which are $\frac{1}{4}$ in. Gudgeon support is riveted to the two thicknesses of steel on end of tub. Tub is self-cleaning.

BAIL: Of channel steel with heavy bail braces. Bail is adjustable.

GUDGEON: Attached to steel end tub, riveted through the two thicknesses of steel.

TRACKER WHEELS: Gray iron, lathe turned, large diameter, mounted in swiveled tracker wheel frames. Tracker wheel axle of steel with eleven long cold rolled steel bearings.

TRACKER WHEEL FRAME AND KEEPER: So constructed that wheel cannot jump the track.

LATCH AND TRIP: Tub dumps automatically when trip strikes the trip block.

Trip block of bar steel 1 x $\frac{1}{4}$ in., can be locked at any desired point on the track.

BEARINGS: All bearings that get wear in operation are machined, to assure accurate fit and smooth surface; this reduces friction, lessens wear, increases ease of operation and adds greatly to life of carrier. Bearings that are left merely cored as they come from the foundry, are covered with sand roughness, which cuts into metal like so much emery. Hence the great importance of machined bearings.

CAPACITY: Is $4\frac{1}{2}$ inches long, 24 inches wide, 15 inches deep, and measures approximately $4\frac{1}{2}$ bushels.

WEIGHT: Approximately 80 pounds. To be used on No. 0000 rod track.




GHORE BOY
THE
LITTER JAMES' CARRIER
MFG CO
FT ATKINSON WIS

"Chore Boy" Carrier Parts

Six 0 Basic Steel Wire,
cut to length.

Four 0 Basic Steel Wire,
cut to length.

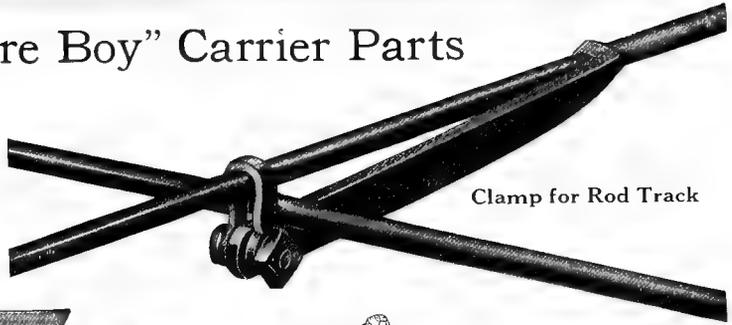

Clamp for Rod Track



Spring Track Suspender, No. 3



Rigid Track Suspender, No. 4


Tension Bolt
Two Sizes:
7/8" x 29"
7/8" x 15"




ANCHOR ROD AND TURNBUCKLE
No. 17




ANCHOR ROD
No. 18
FOR 12 FT POST

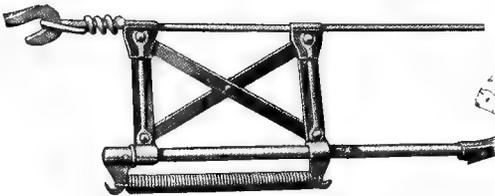

Safety Device, No. 9

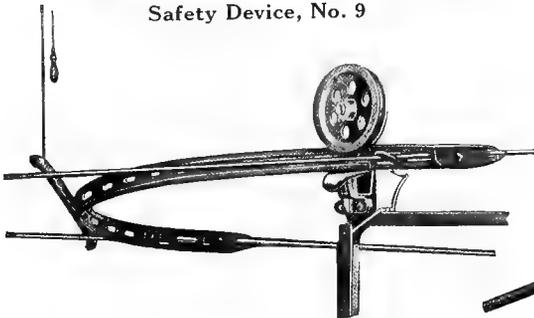

Switch or Curve, No. 6

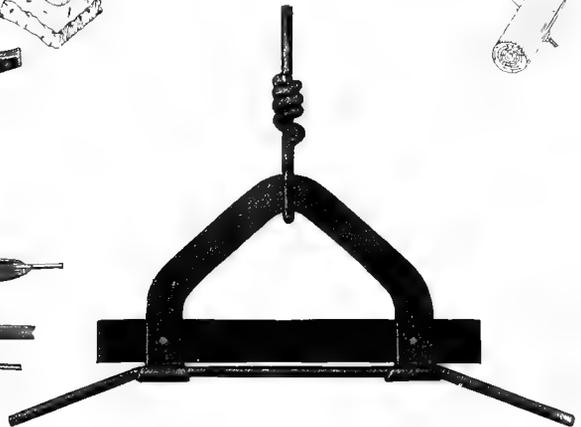

Angle Bracket for Rod Track

FEED CHUTE



The James Feed Trucks

SPECIFICATIONS

16-Bushel Truck

BOX: Constructed of clear selected lumber, strongly reinforced by side cleats. Bottom is No. 18-gauge galvanized sheet steel. Extreme length 68 inches, width 26 inches, height 24 inches. Ends slanting to make shoveling easy. The weight of the feed box is equally balanced on the wheels so that when filled the truck can be run along any reasonably smooth floor or walk with but little effort.

WHEELS: Arrangement of the wheels is such that the truck can be turned around in a space of 75 inches in diameter.

MAIN WHEELS: 12 inches in diameter, 2-inch face. End wheel anti-friction swivel, 6-inch diameter, 2-inch face.

AXLE: 1-inch solid cold rolled steel, with set collars; axle and wheels run freely. Extreme length of shaft 32 inches.

BEARINGS: All bearings that get wear in operation are machined, to assure accurate fit and smooth surface; this reduces friction, lessens wear, increases ease of operation and adds greatly to life of carrier. Bearings that are left merely cored, as they come from foundry, are covered with sand roughness, which cuts into metal like so much emery. Hence the great importance of machined bearings.

CAPACITY: 16 bushels.

WEIGHT: Approximately 200 pounds.


Can be made special in other widths to meet conditions, if alleys or doors are too narrow.



JAMES
DRINKING CUP
WASH TANK

James Milk Can Truck

SPECIFICATIONS

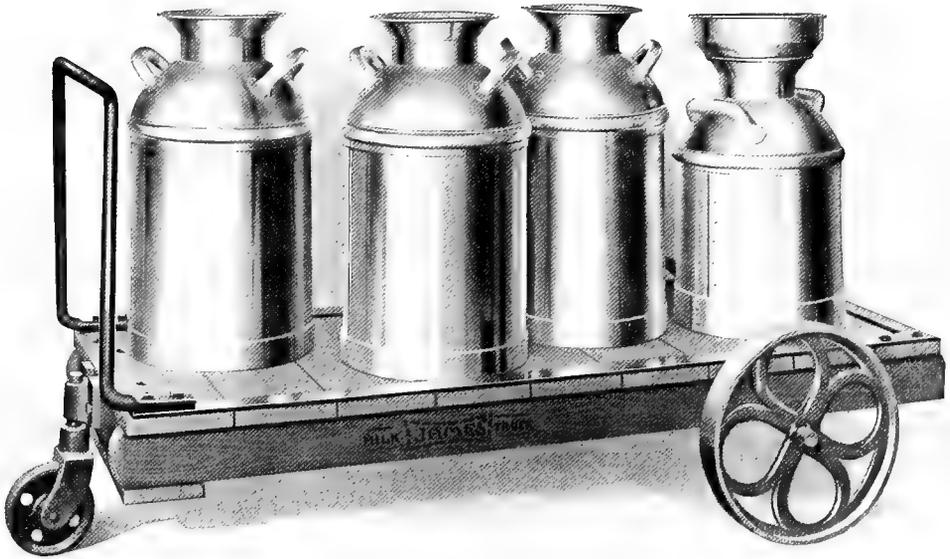

FRAME: Best hard maple.

FLOOR: Clear birch, $\frac{7}{8}$ -inch thick, reinforced with steel straps to prevent wear.

WHEELS AND SWIVEL: Gray iron, heavy, to stand all shocks. Drilled for oil holes. Now made with four wheels, instead of three as illustrated.

AXLE: 1-inch diameter, mild steel.

HANDLE: $\frac{7}{8}$ -inch diameter, mild steel.

Drinking Cup Wash Tank

SPECIFICATIONS

To be used on truck shown above.


Tank made of 18-gauge galvanized sheet steel, strongly reinforced at the top with $\frac{7}{8}$ -in. x $1\frac{3}{8}$ -in. x $\frac{1}{8}$ -in. galvanized angles; all joints securely riveted and soldered both inside and outside.

Divided into two water tight compartments $17\frac{3}{4}$ inches long, 21 inches wide, 13 inches deep and $34\frac{1}{2}$ inches long, 21 inches wide, 13 inches deep.

Over all dimensions of tank are $24\frac{3}{4}$ inches wide, $53\frac{3}{4}$ inches long, 13 inches high.




Section of Pen Dept. Prison Range, Barr
Sheboygan Falls, Wis.
Designed & Equipped the James Way

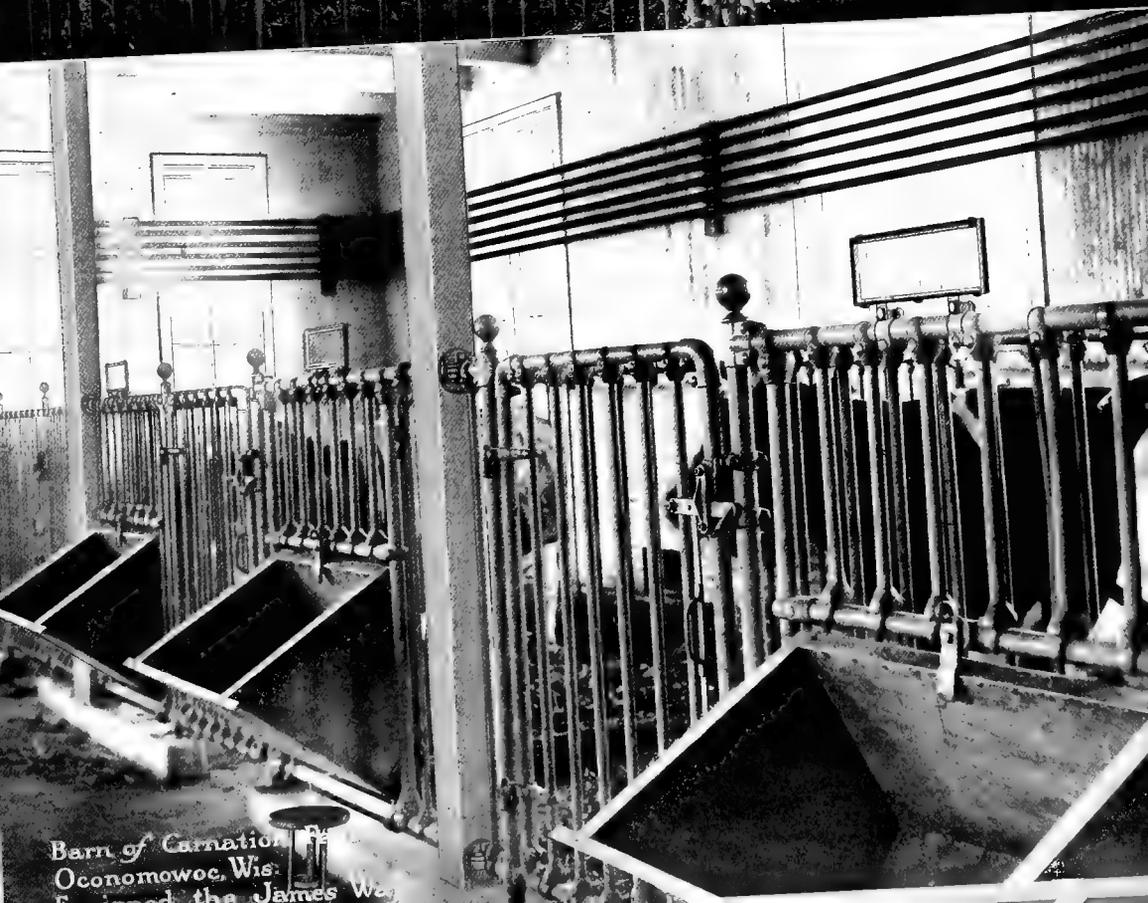

Barn of Carnation Co.
Oconomowoc, Wis.
Designed the James Way

James Sanitary Steel Pens



THE money to be made in dairy farming depends in no small degree on the care and treatment given the animals.

James Sanitary Steel Pens have been developed to aid in making the dairy barn the biggest profit-maker possible. And in the building of these pens, the same principles have been followed that underlie the success of James Cow Stalls.

Not only do James Pens confine the animals securely, but they provide the maximum of cleanliness and comfort, and interfere the least with light and proper ventilation, thus promoting health.

They also reduce barn work and pay big dividends on the investment through the saving of labor alone.

James Pens are Easy to Set Up

The James Pens are most easily erected. They are shipped from the factory already assembled in panels; the gates and the bull pen manger panels are already built. To erect the pens, all that is necessary is to set the corner, intermediate and gate posts in the tubular anchors (which will have already been placed in the concrete curb), bolt the panel to the posts; and fill the tubular anchors with cement. As soon as this cement sets your pen is solid.

This method effects a great saving in the cost of erection. Formerly, we did not use the panel construction but ran each upright into the cement curb, which required great care and much labor to set up the pens. The cost of manufacturing panel construction pens is a third more than the cost of making the pen where each upright runs into the curb; and likewise it saves you half the expense and difficulty in erection. It is a better pen in every way, but our increasing business makes it possible to furnish it without adding to the price because of this improvement.

James Tubular Pen Anchors

(PATENT APPLIED FOR)

The anchors are the only part of the pens required at the time the concrete work is done. James Pen Anchors may be secured on short notice either from Fort Atkinson, or Elmira, N. Y.; Wright-Ziegler Co., Boston; De Laval Dairy Supply Co., San Francisco and Seattle, or some other nearby distributing point. The contractor can go right ahead finishing the cement work according to simple instructions supplied with the anchors. The pens may be set up at any time later when most convenient.

This method makes erection of James Pens so easy that even a boy could do the work and does away with possibility of delay in cementing floors.



United
Milk Condensed Milk Co.

Panels and Posts

The corner post, gate post and upright intermediate post extend through the concrete curb and into the solid floor; these posts support the panels and are spaced no farther apart than five feet on centers for bull pens; nine feet for cow pens.

The uprights are held securely to the horizontals at the top and bottom by heavy malleable inserts with sanitary flanges which fit into ends of uprights and into holes drilled in horizontals, making a smooth neat panel that is easy to keep clean. The panels are bolted together by 7/16 in. special bolts, spaced not more than four spindles apart in bull pens, six spindles in cow and calf pens, and seven in hog pens. All bolts used are heavy cut thread bolts—the most expensive kind but which can be depended upon to hold.

This is a new type of panel construction, combining unusual strength with neat appearance and a minimum of dust catching surfaces.

The Gate Hinge

The hinge on the pen gate is attached not only to the gate and gate post, but runs back to the second upright on both the gate and the panel. The fittings cannot twist under a strain and spring the gate open, as can be done with a gate the hinges of which are attached to but one upright of the gate and one upright pipe of the panel.

Watering Cups for James Pens

The James individual watering cup may be attached to any James pen and provides the most convenient and sanitary means of watering the animals.


We are also in position to furnish name plates, with fittings to attach to pens.

The James "Safety First" Bull Pen

The James sanitary steel bull pen is the most satisfactory way of keeping the bull. He no longer need be tied by a ring in his nose, but can be turned loose to move about with freedom, within sight of the herd, but where he can do no harm.

The dairy farmer of today realizes that the bull is half the dairy herd. To get the best results from the bull, he must be in first-class condition and of high vitality. He is a big heavy animal and it is cruel to confine him in cramped quarters where he has no means of relief. If you keep him in a stall day after day, his muscles naturally weaken from lack of exercise and his vitality is reduced.

If he is uncomfortable, he gets morose, ugly and hard to handle. When turned loose in a James pen, he has plenty of room to change position, and to

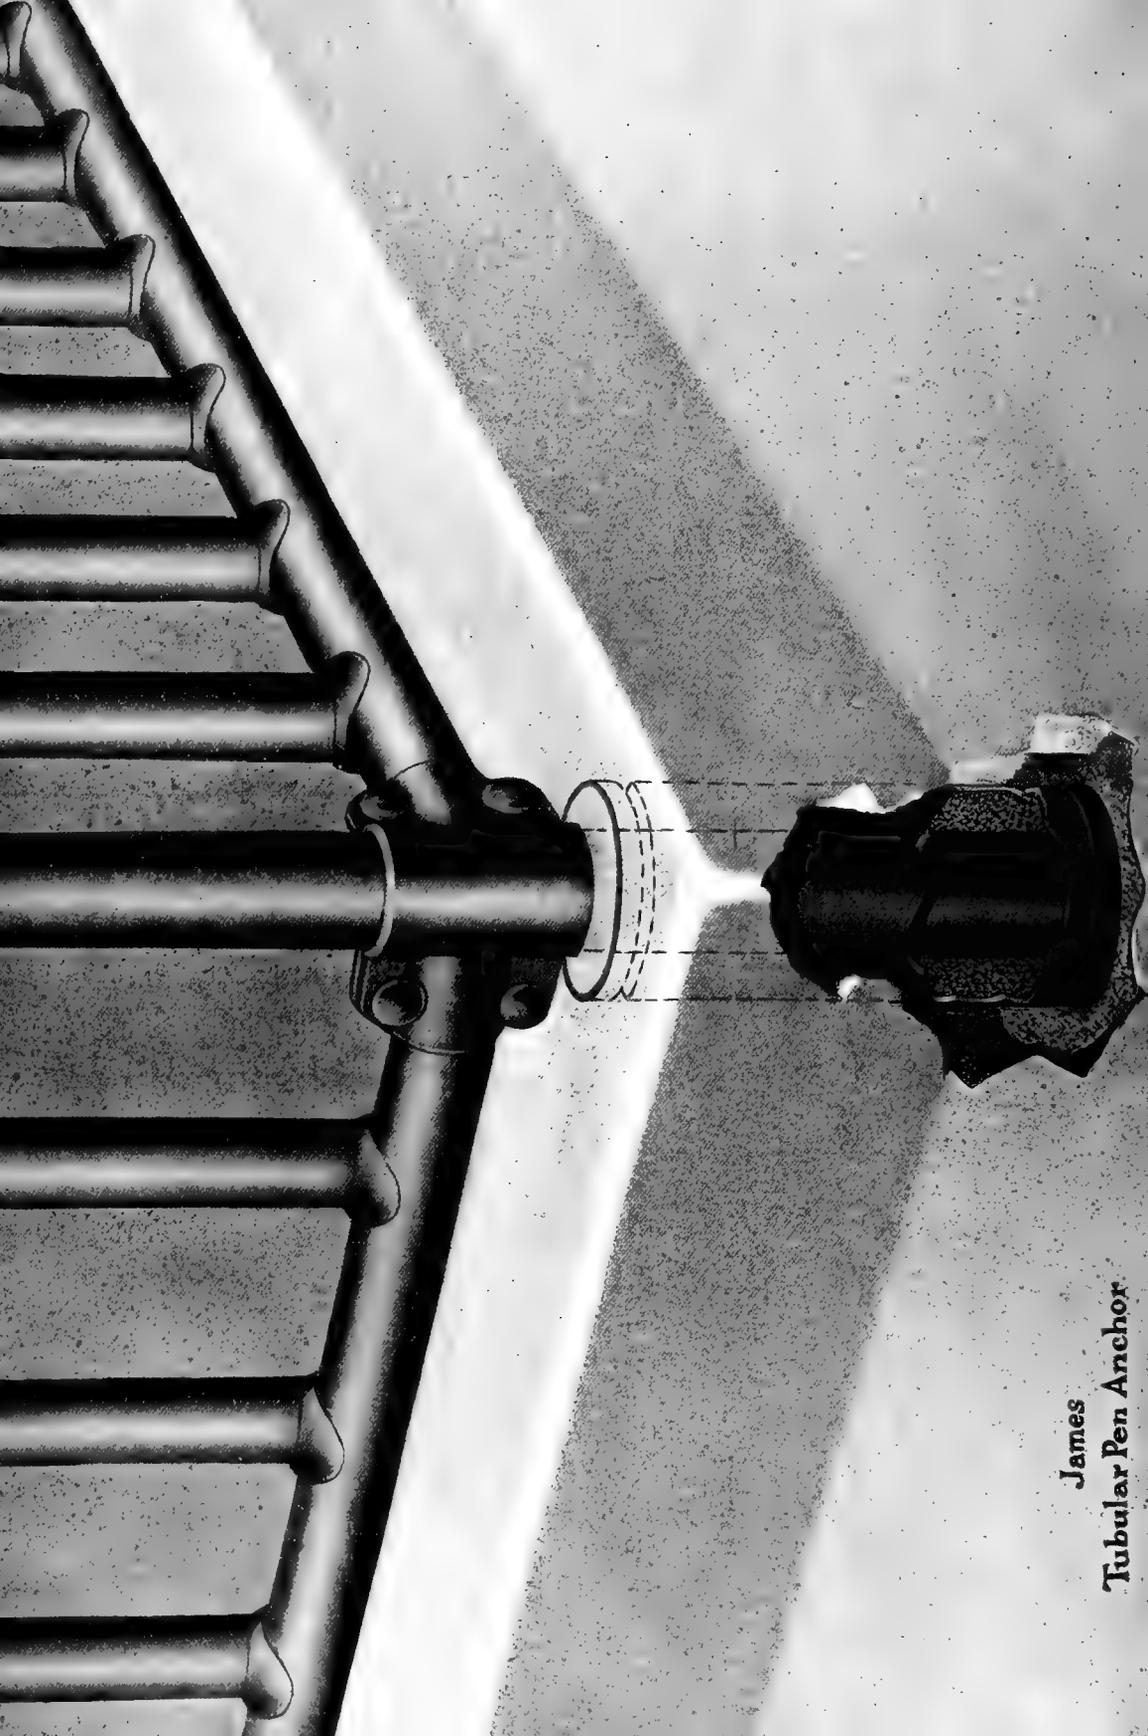

**James
Tubular Pen Anchor**

get all the exercise that he needs to keep him in perfect condition physically. This maintains his vitality and keeps him in better humor. He is far less apt to become dangerously ugly, than when fastened in a narrow stall; this alone is worth the price of the pen.

Many dairymen emphasize the importance of keeping the bull where he can see the herd; claiming that when he cannot get a view of the herd the best results cannot be hoped for, and that he is even liable to become worthless.

The James bull pen is worth its cost from the standpoint of insurance against accidents, for it vastly simplifies and makes safe the handling of the bull.

Safety First

Every man with a family and responsibility believes that insurance is a good thing; you insure your buildings against fire; you insure your automobile; and you insure yourself against death or accident.

You are familiar with the habits of a bull and you know that one does not gradually go mad. He loses his temper in a flash.

What if there are children who play about the barn? What if this bull should become infuriated and break loose while they are near him? What if you have help which does not know how to handle the animal and he breaks loose and injures or kills your hired man? Under the law, you are responsible for accidents that happen because you do not keep the bull in safe quarters. And you yourself might be helpless if he should try to get you and should break loose from his stall while you are in the barn without protection.

The James Pen is a "safety first" device that no owner of a bull can afford to be without.

Looking at the bull pen merely from the viewpoint of insurance, and disregarding its value in other ways, it is a protection that is cheap at the price.


When necessary to work around the bull, you can easily entice him to put his head through the stanchion by placing feed in the manger and locking him in. He cannot get loose until he is turned loose. You can work about him in perfect safety.

This safe, sanitary and humane means of confining and caring for the bull is just as important as any other part of your barn equipment.

Indeed, at any time it may be of far greater importance, by saving your life or preventing serious injury; and do not forget that the condition of your bull affects the whole herd, for he is directly responsible for just about half the quality of your herd.

In order that the pens may stand the severe strain to which they are subjected, the bull pen corner posts, gate posts and intermediate posts are made of double strength pipe $1\frac{7}{8}$ in. O. D. with pipe wall $\frac{1}{5}$ in. in thickness.

James Bull Pen Gate and Bull Pen Gate Lock

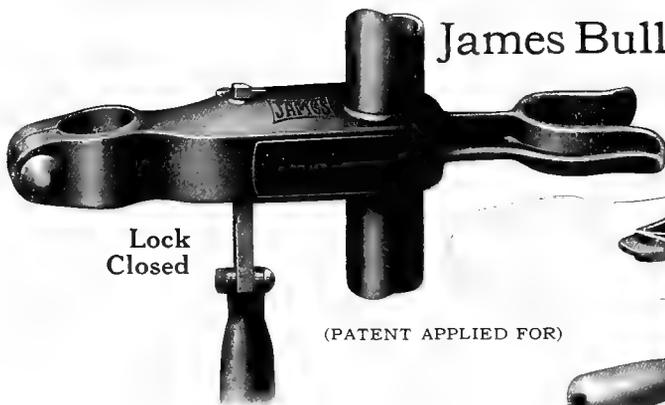

Lock Closed

(PATENT APPLIED FOR)



Lock Open



The posts are so strong that the unsightly, cob-web catching arches over the gates are no longer needed. Being strong enough for the gate, the posts are of course also strong enough at the end of a panel next the wall, the panel does not need to be attached to the wall.

If you realize what a strain a bull pen is put to if a bull weighing a ton or more throws himself against it with all his force, you will see the wisdom of buying a bull pen with James quality of materials and James construction.

The inside walls of the James bull pen have no tilting mangers or feed boxes which the bull can worry and break down by testing his strength. The manger is built of pipe and is just as strong as the rest of the pen. A watering bucket can be attached to the manger so that the bull may have water before him all the time.

The stanchion is adjustable in neck space and has a wood lining which not only adds to strength of stanchion but keeps the neck of the bull from contact with the cold steel when locked in the stanchion. The stanchion is easy to open, but cannot be opened by the bull. It locks by simply slamming shut.

The Bull Proof Lock

(PATENT APPLIED FOR)

We have developed a new lock for the pen gate that insures safety, for it is so constructed that it never fails to catch when the gate is slammed shut. It is very simple in construction, bull-proof and positive in action. The gate lock cannot be opened except by your hand. The "disappearing" handle must be raised, then turned—two operations which it is impossible for the bull to perform. The upright posts are clean of all projecting fittings and there are no sharp points to jam the bull as he comes in or out of the pen.

"I got a bull pen from you at the same time. It is very secure, lessening the risk of keeping a bad animal tied away from other stock. Some time before, without this pen, I had a loss of nearly \$250 in having a bull get loose, killing a horse in the stall in the barn."—A. A. Turk, Rice Lake, Wis.



James Sanitary Bull Pen

(PATENT APPLIED FOR)

SPECIFICATIONS

CORNER POSTS: $1\frac{7}{8}$ in. O. D. double strength pipe. Used with James Tubular Pen Anchors.

GATE POSTS: $1\frac{3}{4}$ in. O. D. double strength pipe. Used with James Tubular Pen Anchors.

INTERMEDIATE POSTS: $1\frac{7}{8}$ in. O. D. double strength pipe. Spaced not more than 5 ft. apart. Used with James Tubular Pen Anchors.

PANEL HORIZONTALS: $1\frac{5}{8}$ in. O. D. pipe. Top and bottom horizontals bolted together with $\frac{1}{16}$ in. cut thread bolts, spaced no more than four spindles apart.

PANEL UPRIGHTS: $1\frac{5}{8}$ in. O. D. pipe spaced $6\frac{3}{4}$ in. on centers.

ANCHORS: James Tubular Pen Anchors $3\frac{1}{2}$ in. O. D. 9 in. long. Made of 24-gauge steel. These anchors are the only part of the pen required at the time the concrete work is done. (See page 234.)

FITTINGS: Best Malleable. $\frac{1}{2}$ in. cut thread bolts used with fittings for attaching panels to posts.

ORNAMENTS: Best malleable; dust proof type.

GATES: Frame $1\frac{3}{8}$ in. O. D. pipe, with $1\frac{3}{8}$ in. O. D. pipe uprights. All fittings of best malleable. Equipped with heavy bull proof lock. Hinges are of best malleable, offset so that gate will swing back against pen. Half the hinge clamped not only to the gate post but also to the upright next to it; the other half of hinge not only clamped to the gate frame but also to the upright next to it.

GATE LOCK: Best malleable. Double latch connected by $\frac{3}{8}$ in. square steel rod. Gate locks when slammed shut; can be opened only by hand, it being necessary to raise the lever and turn. Cannot be opened by bull. Simple, positive in action, strong. (See page 236.)

FINISH: The steel is first mechanically cleaned, removing scale, grease, and foreign matter, thoroughly preparing the material for painting; it is then finished with the best gray protective enamel, baked for two hours at a high temperature. (See page 125.)

HEIGHT Pen is 5 ft. 4 in. from the floor.

WEIGHT: 40 lbs. per linear foot.

SHIPPED ASSEMBLED IN PANELS

James Bull Pen Manger

CONSTRUCTION: $1\frac{5}{8}$ in. O. D. pipe with malleable fittings and dust proof ornaments. Corner Posts $1\frac{3}{8}$ in. O. D.



SIZE: Regularly furnished 26 in. wide, 36 in. long and 28 in. high from floor. Size and shape may be varied to suit conditions.

James Bull Stanchion

(PATENT APPLIED FOR)

Side bars of $1\frac{5}{8}$ in. O. D. double strength pipe with wood linings bolted on. Horizontal at bottom is of square pipe $1\frac{1}{2}$ x $1\frac{1}{2}$ in. Fittings are of best malleable.

Neck space is adjustable from 7 to 15 in. Stanchion lock is of safety type. Cannot be opened by bull. Locks when stanchion is slammed shut; of best malleable. (See page 232 for illustration.)

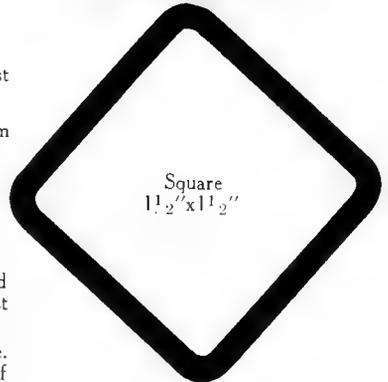

Exact sizes of pipe used.

The James Cow Pens

Cow pens are used for many purposes but generally for sick animals or for animals that for some special reason are being given every advantage for development, growth or production.

Pens are used for animals that need special care.

Whether pens are to be used for increasing production, for hospital purposes, or for growing animals, the great idea to be kept in mind is to so build them as to provide June comfort, light, ventilation and sanitation the whole year around.

This same idea should, of course, always be in mind with barn building, but more especially with pen barns as these are to house animals at critical periods of their lives when they must receive special care.

The James cow pen is constructed of steel paneling which does not obstruct light or hinder ventilation. Cork brick makes a very good substitute for the pasture bed; it saves bedding, avoids udder troubles and the most valuable place for cork brick is for pen floors.

The removable bucket is very necessary especially with the pen used for hospital purposes. Often the animal must not have access to water and often the pen is used for an animal suffering from an infectious disease. There is no other cup so easily cleaned as the James cup, which can be removed, put into a tank and washed, or thoroughly sterilized.

The James cow pen not only provides June comfort for the stock but makes it possible to maintain this condition the year around. It is easily cleaned and in reality is a hospital, a place where any animal can do her best to throw off disease, to produce or to grow.

The old-time wooden box stall is a pest house as soon as the first infectious case is housed in it.

Perhaps the most common use of the cow pen in the average barn is for a freshening pen. This is the most important period for the dairy cow as the manner in which she passes through the critical period has a great deal to do with how she produces during her lactation period.

The cow should be placed in the pen several days before freshening and allowed to get used to it before the calf is born. As soon as the calf is able to walk he should be removed to different quarters and the cow allowed to remain in the pen for several days, after which she is put back in the stall if she is a dairy cow.

Of all the diseases that cattle have abortion is by far the worst. There is no known cure. We know how it spreads. The only way to stop its spread is by sanitation especially at freshening time. An infected freshening pen can easily cause every cow in the herd to abort the following year. One cannot tell what cow may infect the pen and the only safe way is by thorough cleaning after each calf is born. This is a very simple task with the James sanitary

pen but a very difficult one with pens of faulty construction. With the James pen the floor and the steel panels can easily be washed with a strong disinfectant.

Not only does the James cow pen meet every requirement in providing the maximum of ventilation, light and dryness, but it makes it very easy to keep the pen clean from day to day. The smooth surface of the steel offers little opportunity to collect dust and germs.

James Tilting Feed Manger

The James Tilting Feed Manger for cow pens is a time and labor saver in feeding the cow, and is one of the most convenient devices about the barn.


It is the only feed manger that solves the problem of feeding in the pen; making it possible to feed the animal without going inside.

Where an ordinary manger is used, the droppings of the cow are certain to fall into it, unless placed so high that it prevents her eating. If placed on the floor, or low enough for feeding, the box is certain to become fouled, to be tramped on, and to interfere with the cow's freedom.

The James Tilting Feed Manger is placed at a convenient height for the cow; it is inside the pen while she is eating, and may be outside the pen, out of her way the balance of the time. It then takes up no room inside the pen when not in use, giving the cow the full benefit of the space.

To feed, the manger is filled and tilted in, locking in position; when the cow is through eating, it may be tilted out. To clean, the manger is dropped to the floor outside the pen and quickly swept out or flushed.

The manger requires 3 feet 3 inches of the panel, and is 3 feet long; projects 20 inches into the pen, 21 inches into the alley when swung out for filling, and 25 inches into the alley when dropped to the floor for cleaning.

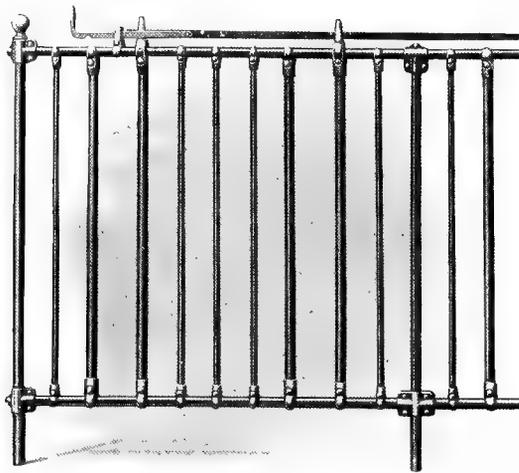

(Stanchion Panel for Young Stock.)

(PATENTED)

Stanchions should not be spaced closer than 2 feet 4 inches on centers.



James Sanitary Cow Pen

James Sanitary Cow Pen

(PATENT APPLIED FOR)

SPECIFICATIONS

CORNER POSTS: $1\frac{1}{8}$ in. O. D. pipe. Used with James Tubular Pen Anchors.

GATE POSTS: $1\frac{1}{8}$ in. O. D. double strength pipe. Used with James Tubular Pen Anchors.

INTERMEDIATE POSTS: $1\frac{1}{8}$ in. O. D. pipe. Used with James Tubular Pen Anchors. Used when panels are over nine feet.

PANEL HORIZONTALS: $1\frac{1}{8}$ in. O. D. pipe. Top and bottom horizontals bolted together with $\frac{7}{16}$ in. cut thread bolts, spaced not more than six spindles apart.

PANEL UPRIGHTS: $1\frac{1}{16}$ in. O. D. pipe spaced $5\frac{1}{4}$ in. on centers.

ANCHORS: James Tubular Pen Anchors $3\frac{1}{2}$ in. O. D. 24-gauge steel, 9 in. long. Pen anchors are the only part of the pen required at the time the concrete work is done. (See page 234 for illustration.)

FITTINGS: Best malleable. $\frac{7}{16}$ in. cut thread bolts used with fittings for attaching panels to posts.

ORNAMENTS: Best malleable; dust proof type.

GATE: Frame of $1\frac{1}{8}$ in. O. D. pipe with $1\frac{1}{16}$ in. O. D. steel pipe uprights. All fittings of best malleable. Equipped with same safety lock as on the bull pen. Hinges are of best malleable, offset so that gate swings back against pen. Half the hinge clamped not only to the gate post but also to the upright next to it; the other half of hinge clamped not only to the gate frame but also to the upright next to it.

GATE LOCK: Best malleable. Double latch, connected by $\frac{3}{8}$ in. square steel rod. Gate locks when slammed shut; can be opened only by hand, it being necessary to raise the lever and turn. Can not be opened by the cow. Simple, positive in action, strong. (See page 236.)

FINISH: The steel is first mechanically cleaned, removing scale, grease and foreign matter, then followed with a chemical bath, thoroughly preparing the material for painting; it is then finished with the best gray protective enamel, baked for two hours at a high temperature. (See page 125.)

HEIGHT OF PEN: 5 feet from floor.

WEIGHT: 25 lbs. per linear foot.

SHIPPED ASSEMBLED IN PANELS


James Cow Pen Tilting Manger

Made of heavy galvanized sheet steel, built on a framework of galvanized angle iron $1\frac{1}{2} \times 1\frac{1}{2} \times \frac{3}{8}$ in. and $1\frac{3}{8} \times \frac{7}{8} \times \frac{3}{8}$ in. securely riveted. Upper edge of manger, inside of pen, reinforced with heavy wood bar, which prevents the cow injuring herself on the edge of manger. Hinges are of best malleable, the automatic lock is of best malleable.

Stanchion for James Cow Pen

(PATENT APPLIED FOR)


Stanchion bars of $1\frac{1}{8}$ in. O. D. pipe, with wood linings bolted on. Fittings are of best malleable. Neck space is adjustable from seven to fifteen inches. Stanchion lock is of safety type. Cannot be opened by cow. Locks when stanchion is closed; of best malleable.

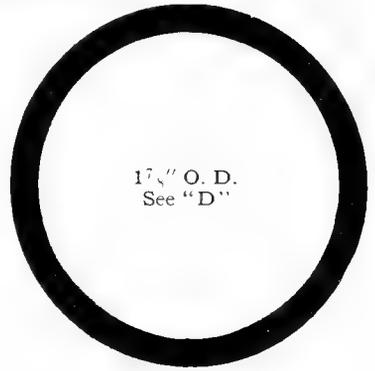


17 $\frac{1}{8}$ " O. D.
See "D"



17 $\frac{1}{8}$ " O. D.
Double Strength
See "E"



15 $\frac{1}{8}$ " O. D.



1 $\frac{1}{8}$ " O. D.
See "F"


Exact sizes of pipe used.



Friend Hospital, Treves, Pa.
Designed and Equipped the James Way




Friend Hospital, Treves, Pa.
Designed and Equipped the James Way

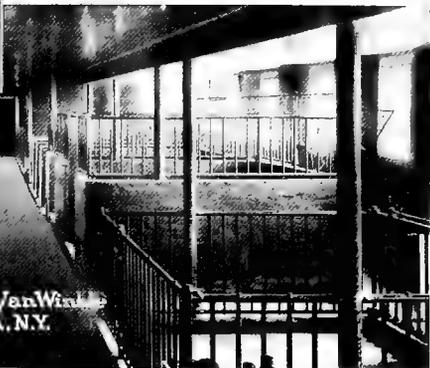

Barn of G.H. VanWinkle
Geneva, N.Y.



Test Barn of West Hill
Pottsville, Pa.

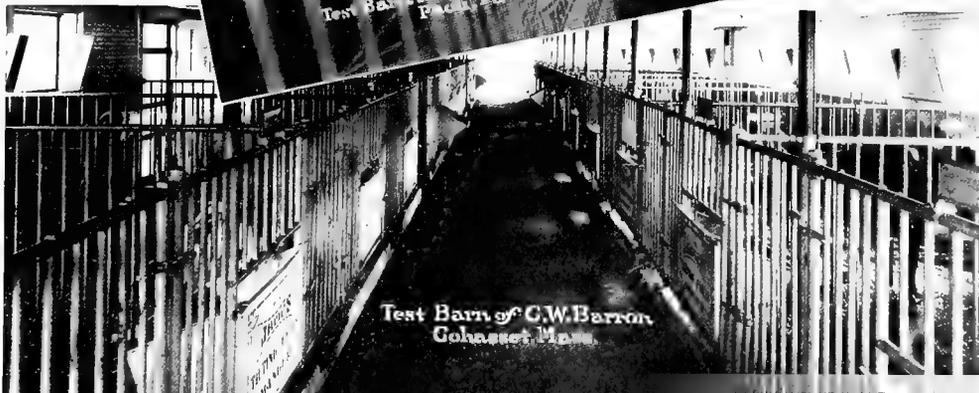

Test Barn of C.W. Barron
Gohasset, Mass.

James Calf Pens

You have often noticed that the best producers in your herd are the most sensitive and are high strung animals. The calves from which these cows developed were more delicate and sensitive than the scrub calves.

If you stunt a calf, it can never develop into as profitable a cow as it should have done with good and thrifty natural growth. The first year of a cow's life will either make or ruin her as a high-grade producer.

The old wooden calf pen is apt to be the dirtiest place in the barn.

If the calf is to develop to the best advantage you must keep it in a clean, dry, comfortable place with plenty of light and fresh air.

The James sanitary steel calf pens make it possible to give the little animals the start in life which they should have.

At the same time the work of caring for the calves is lessened and the saving of labor alone pays big dividends on the investment.

The calves can be fed easily and more quickly in a James pen. We build adjustable calf stanchions into the front panel; at feeding time the calves are run into the stanchions which are then closed.


The James pen with its easily cleaned mangers or with the "Anti-sucking" guards enable you to feed each calf just the amount it should have; the fast eating and fast drinking calf cannot rob the others.

The James stanchions and complete mangers or Anti-sucking Guards make it easy to break calves of sucking one another. The sucking habit seems to be caused by the milk taste in the mouth of the calf giving him the desire to suck until this taste is removed.

By confining the calves in the stanchions while they are being fed milk, they may be given dry feed after they are through drinking, to take away the milk taste. Within ten or fifteen minutes the calves will have forgotten their desire to suck and in a few days will lose the habit entirely.

Now here is the proposition. Every cow that you raise for the next ten or fifteen years, at least, will probably be started in the calf pen. In this time you may raise from 75 to 100 or 150 calves. The first cost of this pen is the only cost and, therefore, the money you put in it now, you can figure on dividing equally among the number of calves you will raise in that time. The cost per calf is very little.


The calf, like any other baby, is very sensitive, requiring the proper care and surroundings, as well as suitable food, if it is to thrive and grow into a vigorous animal.

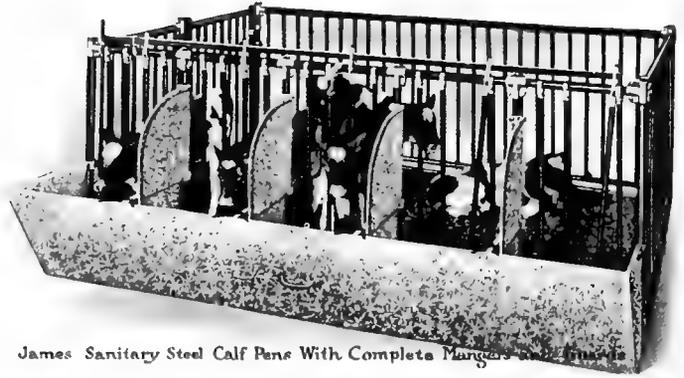

James Sanitary Steel Calf Pens With Complete Mangers



James Sanitary Steel Calf Pens
 The most complete and sanitary way
 of raising calves

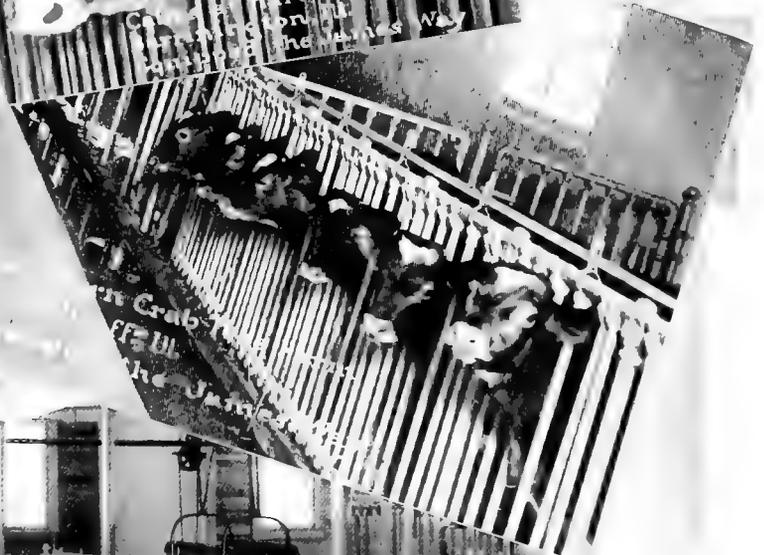

James Sanitary Steel Calf Pens
 The most complete and sanitary way
 of raising calves



The calf is the foundation of the future herd. Stunt the calf and it can never develop into the profitable cow which good care and thrifty growth would have produced.


You take pains to build up your herd and breed quality into your calves. Is it not wise, therefore, to spend perhaps 50c or \$1 on each calf providing it with the proper quarters, as insurance against its sickness, against its being stunted, and to make sure of better cows?

In connection with the stanchions on the calf pen, we can furnish the complete manger with head guard, it being easy to thoroughly clean the cement trough by raising the mangers; or the "Anti-sucking" guards which prevent one calf from reaching over and tormenting the one next to it.

The "Anti-sucking" guards may be easily swung to the side, back against the stanchion, when you wish to clean out the cement trough in front of the stanchion; or may be removed entirely; when in use to separate the calves it is held rigidly.

There are no sharp fittings on the pen against which the calves can injure themselves. For the first few weeks of its life the calf's skull is soft and a sharp blow against it will greatly injure and sometimes kill the little animal. There are a great many cases where valuable high-bred calves have been killed in this way and in purchasing a pen this is a point to be looked for.


All the stanchions are adjustable in neck space, accommodating the calves as they grow. The stanchions may be controlled by a single lever, opening or closing them all at the same time; or they may be opened or closed one at a time.

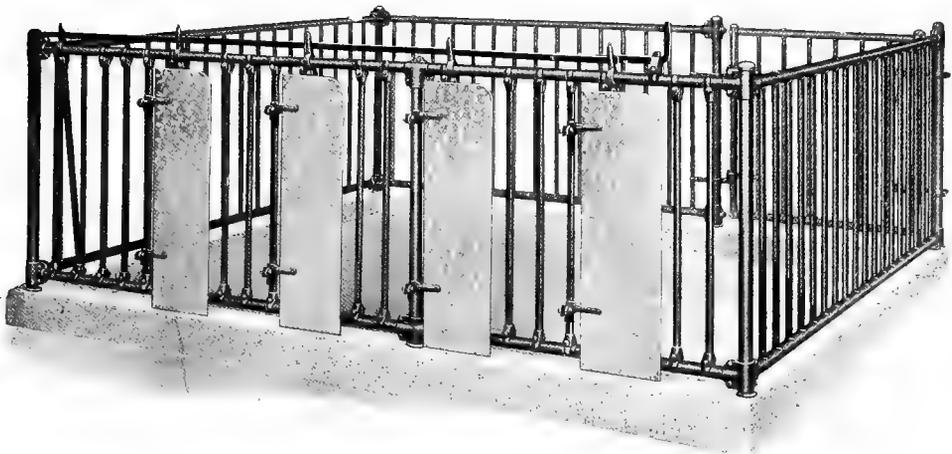

James Calf Pen with "Anti-Sucking" Guards
(PATENTED)



Calf Barn of Fred Pahst,
Oconomowoc, Wis

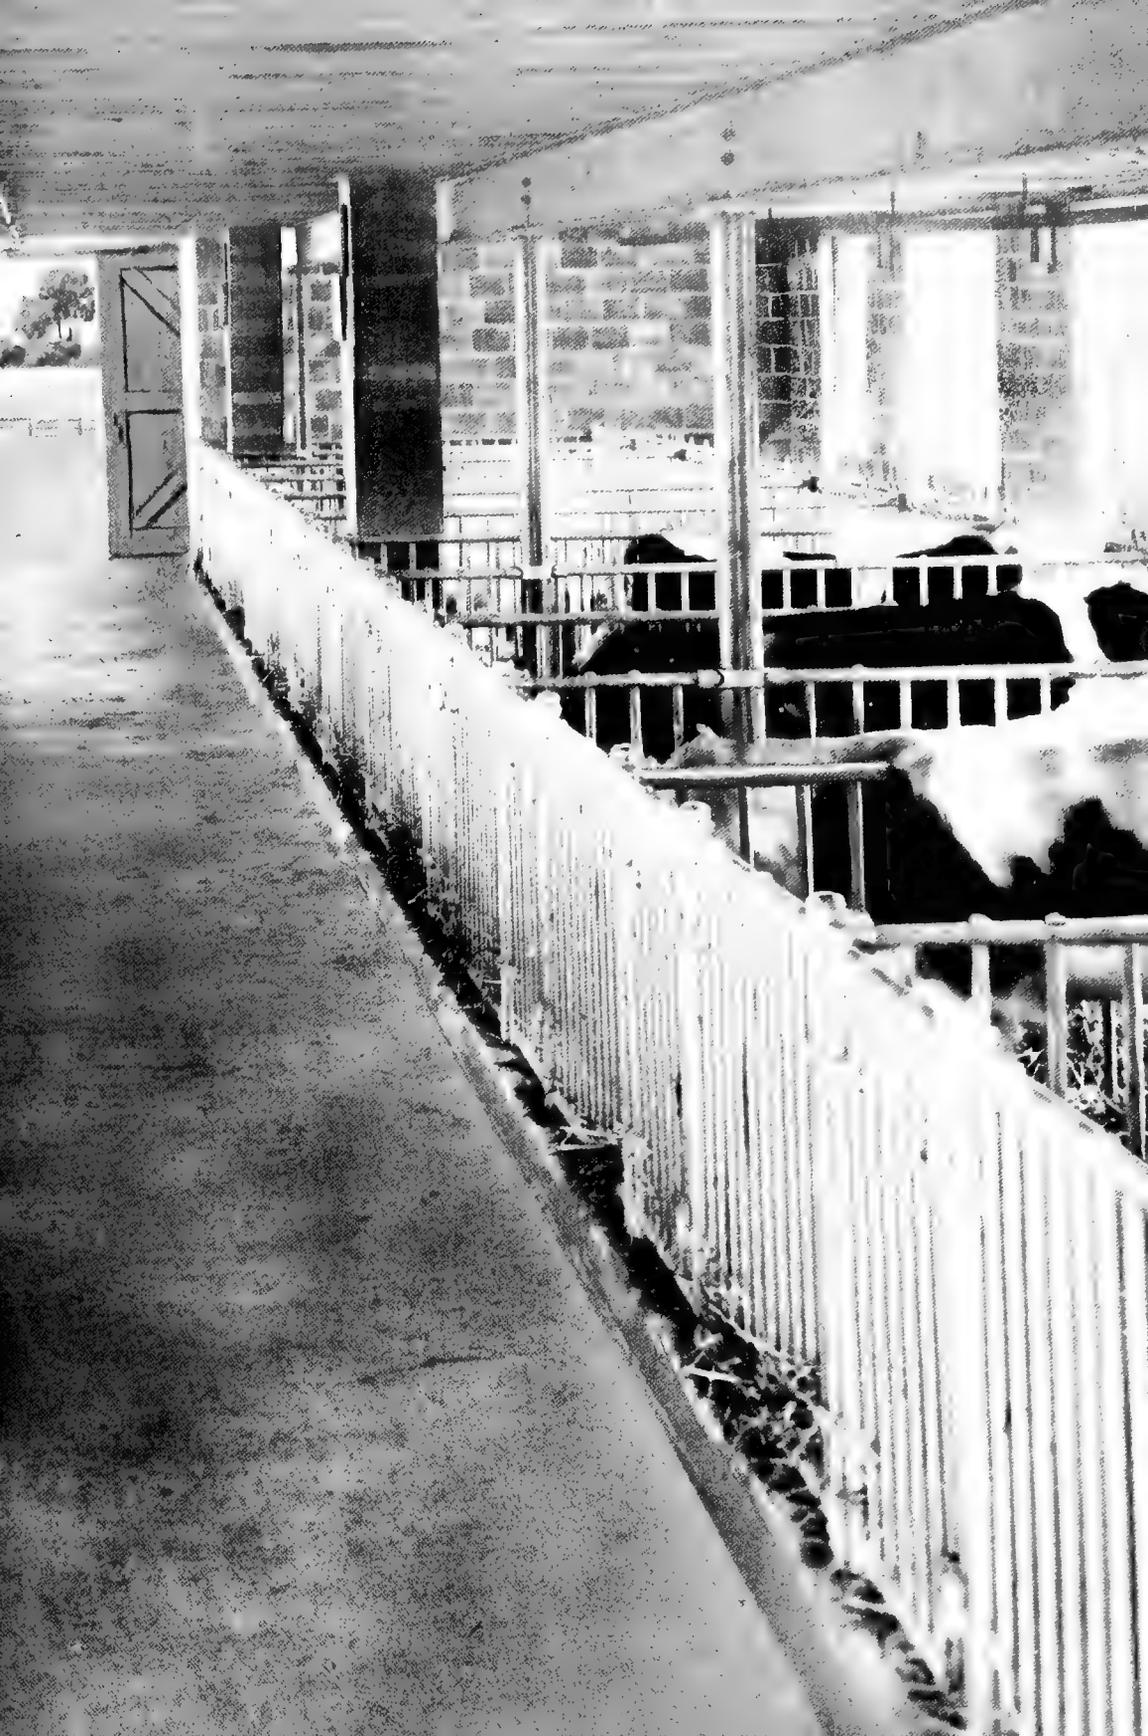



James Sanitary Calf Pen with "Anti-Sucking" Guards
(PATENTED)

James Sanitary Calf Pen

(PATENTED)

SPECIFICATIONS

- CORNER POSTS:** $1\frac{1}{8}$ in. O. D. pipe. Used with James Tubular Pen Anchors.
- GATE POSTS:** $1\frac{1}{8}$ in. O. D. double strength pipe. Used with James Tubular Pen Anchors.
- INTERMEDIATE POSTS:** $1\frac{1}{8}$ in. O. D. pipe. Used with James Tubular Pen Anchors.
- PANEL HORIZONTALS:** $1\frac{1}{8}$ in. O. D. pipe. Top and bottom horizontals bolted together with $\frac{1}{16}$ inch cut thread bolts, spaced not more than six spindles apart.
- PANEL UPRIGHTS:** $1\frac{1}{16}$ inch O. D. pipe spaced approximately $5\frac{1}{4}$ inches on centers.
- ANCHORS:** James Tubular Pen Anchors $3\frac{1}{2}$ in. O. D. pipe, 9 in. long. Made of 24-gauge steel. Pen Anchors are the only part of the pen required at the time the concrete work is done. (See page 234.)
- FITTINGS:** Best annealed malleable. $\frac{1}{16}$ in. cut thread bolts used with fittings for attaching panels to posts.
- ORNAMENTS:** Best malleable; dust-proof type.
- GATE:** Frame of $1\frac{1}{8}$ in. O. D. pipe with $1\frac{1}{16}$ in. O. D. pipe uprights. All fittings of best malleable. Equipped with safety lock as on the bull pen. Hinges are offset so that gate swings back against pen; of best malleable, half the hinge clamped not only to the gate post but also to the upright next to it; the other half of hinge clamped not only to the gate frame but also to the upright next to it.
- GATE LOCK:** Best malleable. Double latch, connected by $\frac{3}{8}$ in. square steel rod. Gate locks when slammed shut; can be opened only by hand, it being necessary to raise the lever and turn. Can not be opened by the animal. Simple, positive in action, strong. (See page 236.)
- FINISH:** The steel is first mechanically cleaned, removing scale, grease and foreign matter, then followed with a chemical bath, thoroughly preparing the material for painting; It is then finished with the best gray protective enamel, baked for two hours at a high temperature. (See page 125.)
- HEIGHT:** With 6-in. curb, pen is 3 feet 10 inches from the floor.
- WEIGHT:** 22 lbs. per linear foot.

SHIPPED ASSEMBLED IN PANELS

James Calf Stanchions

(PATENTED)

James Calf Pen Panels will be fitted with James Calf Stanchions at a slight additional cost. James Calf Stanchions are adjustable in neck space; may be opened and closed one at a time or all together. Made of $1\frac{1}{16}$ in. O. D. pipe; fittings of best malleable; all stanchions connected with bar steel lever.

We recommend allowing 24 inches on centers for each calf; and not less than 20 inches.

Calf Pen Mangers


(PATENTED)

Constructed the same as the James Complete Mangers for cow stalls, described on page 243, excepting that James Calf Pen Mangers are made with flat bottom, and without manger lifting springs. (See page 246 for illustration.) Calf Pen Mangers project 28 inches from the panel and are $20\frac{1}{2}$ inches deep.

"Anti-Sucking" Guards

(PATENT APPLIED FOR)


Made of 14-gauge galvanized steel, $10\frac{7}{8}$ in. x 36 in. Fittings of best malleable, so constructed as to reinforce the guard. Guards held rigidly in place by the fittings, but easily lifted and swung back against panel.

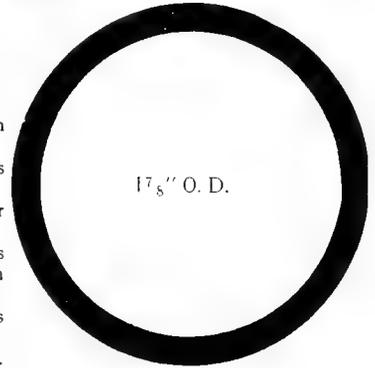


17 $\frac{5}{8}$ " O. D.



17 $\frac{5}{8}$ " O. D.
Double Strength




15 $\frac{1}{2}$ " O. D.



1 $\frac{1}{16}$ " O. D.


Exact sizes of pipe used

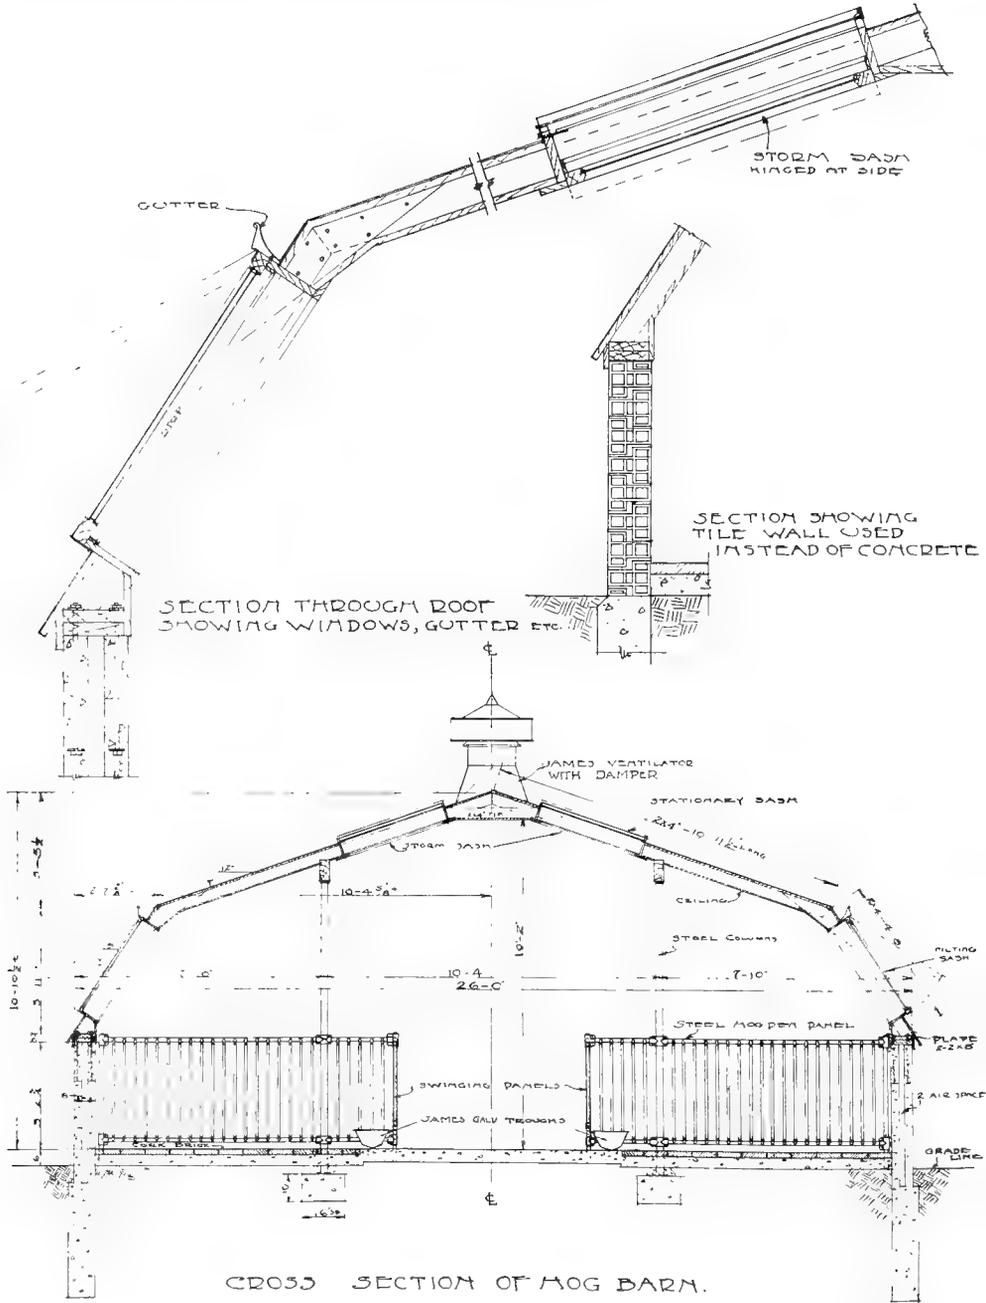

CROSS SECTION OF HOG BARN.

PATENT APPLIED FOR

The James Sanitary Hog Pen



THE early hog is, of course, the profitable hog. If it is possible to send a bunch of pigs to the market a month earlier than you would ordinarily send them, that bunch of pigs is proving a big money maker; but the early pig is not saved without warm, dry and sanitary quarters. It is necessary to properly house pigs for winter farrowing if you expect to prepare them for early pasturage and early market.

To provide such quarters, the James Manufacturing Co. presents a new type of hog barn construction. The new construction has met with the approval of every hog raiser who has inspected it.

This new James Gambrel roof barn is superior to any other type of hog barn construction, in that it permits a greater amount of sunlight. By facing the barn Northwest and Southeast, it is possible to have sunlight on the floor throughout the day.

The saw-tooth hog barn which has been advocated in the past, and with which you are familiar, will admit the sun only five or six hours of the day. Hog men who have used the saw-tooth barn, in a good many cases condemn it because it is too cold, owing to the great height between the floor and the apex. This height, if the saw-tooth barn is properly proportioned, is 14 ft.; the greatest height between the ceiling and floor in our new barn is 10 ft.; thus the barn is warm and comfortable, which is even more important than sunlight in a farrowing building.

The two windows in the first pitch can be tilted, if desired, allowing a flow of air to pass through the building. The windows are high enough so the draft will be above, and not directly onto the animals. The two upper sash should be stationary as it would be unnecessary to open them at any time. We furnish detailed drawings showing how the sash should be built.

The cheapest and best material to use for the walls is hollow tile, although a monolithic cement wall with an air space will prove entirely satisfactory.

The roof is, of course, of ordinary frame construction. It should be covered with a composition roofing. This would prove more economical than shingle and it is easier to handle around the built-in windows.

There are varied opinions as to the material best suited for the floor. Our experience has been that a cement floor with a cork brick or creosoted block nesting place is the more satisfactory. Some hog breeders have recently adopted a combination hollow tile and cement floor which is proving highly satisfactory. The floor is laid of hollow tile, in 2-in. covering of concrete, the air space in the tile keeping the floor warm and comfortable.

The cost of the new type of hog barn is a little higher than the cost of the saw-tooth barn, but the additional cost is much more than offset by the greater benefits.



The James Sanitary Hog Pen

The James Sanitary Steel Hog Pen helps prevent disease because of the cleanliness made possible through its use; it aids the little pigs in their development by affording light and ventilation; making them marketable at the earliest possible date; cuts down labor bills, both in feeding the pigs and in cleaning the barn; it is permanent, the first cost being the only cost. It is pleasing in appearance and a source of lifetime satisfaction to the purchaser.

The biggest advantage in the James steel hog pen is that it permits of sanitary conditions in the barn. There is but one way in which the hog cholera germs, for example, can be done away with and that is by maintaining a clean hog house. James pens permit plenty of sunlight and fresh air to enter. The pens can be much more easily and effectively fumigated than wood and this is a big item to be taken into consideration especially among those hog raisers who disinfect their barns almost daily.

James steel hog pens can be more easily and quickly cleaned than wood pens; they are always drier than the wooden pens because the sunlight has access to every square foot of floor space, and because the steel pen interferes least with proper circulation of air.

It is a noticeable fact that in a steel equipped hog barn the hogs seem much more contented than ordinarily because of their ability to see about. It is also possible for the attendant to see into every pen from any part of the barn.

James hog pens are constructed throughout of pipe, thoroughly cleaned and finished in enamel baked on, the same as other James equipment.


The hog pens are shipped assembled in panels. To erect the pens it is necessary only to set the corner and gate posts in the tubular anchors (which will have previously been set in the concrete), bolt on the panels, and pour in cement around the gate and corner posts; when this cement is set the pen will be solid.

The great amount of labor saved in the erection by using James assembled panels, is a big item. Figure the labor required to build a wooden pen and you will find that it goes a long ways towards paying for the steel pen.

James steel pens are exceedingly durable, the first cost being the only cost, whereas wooden pens rot out in time necessitating the replacing of the entire outfit, and in the end costing more than the steel.

Where the James steel pens are used the dividing panels can be swung up, out of the way, throwing two or three pens into one for feeding purposes.

James hog pens are built any size required. The average farrowing pen should be 8 ft. 6 in. x 9 ft. 6 in. The size of the pens, of course, will vary with the personal preference of the purchaser, but the above size is looked upon as standard.

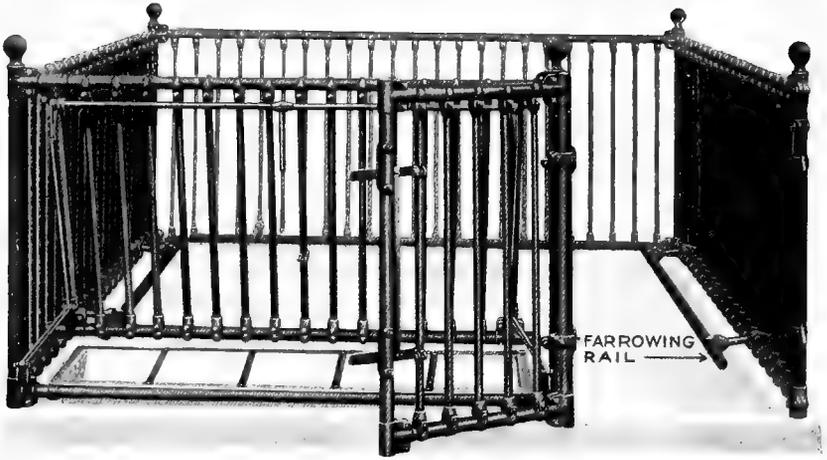

James
Sanitary
Hog
Pens



The nesting place should be about 5 ft. 6 in. x 7 ft. in a standard pen. Either cork brick or plank should be used for the nest. Usually the nest is about 2 inches higher than the main floor. Some seem to think that the sow will not always take the nest, but this is the case only when the attendant has been careless in bedding. If the nest only is bedded, the sow will lie there.

It is advisable to slant the pen floor towards the wall using a shallow gutter next to the wall for drainage purposes.

The Farrowing Rail

Too much stress cannot be placed upon the importance of the farrowing rail. When the sow lies down, the farrowing rail will prevent her from crushing the little pigs against the wall; they will simply be shoved under this rail and be protected in the space between the rail and the panel, and then run around to the front side of the mother.

The farrowing rail should be 8 in. above the floor and the same distance from the panel, and should extend around three sides of the pen.

The James farrowing rail may be swung up out of the way after the little pigs are able to take care of themselves, and the farrowing rail is no longer needed. Lifting the farrowing rail transforms the pen into a feeding pen.

The Swinging Panels

The swinging front panel will appeal to every man who has ever taken an active part in hog feeding. It does away with any need of straddling the fence, kicking the old sow in the ribs, at the same time trying to keep a dozen or so little pigs away from the trough while attempting to pour in the liquids.

An ingenious device makes it possible to swing the panel, by means of a lever at front of pen. See illustrations. Front panel is equipped with latch for holding trough up out of the way when not in use; when in this position trough drains itself and will be kept free from dirt. Easily flushed clean with water.

Panels between pens are so constructed that they may be brought up and locked out of the way thus turning two or more hog pens into one larger pen.

Tilting Trough

The trough is of a peculiar design, which prevents trouble from liquids in the trough freezing; on account of the sloping sides, the contents rise as it freezes. The shape of the trough also allows the pigs to get every bit of the contents; at the same time the trough will drain very easily. When the trough is tilted it gives the hog that much more room in the pen, and makes it easier to clean the floor.

Like all James goods, the hog trough is of unusually strong construction, and should last as long as the pen.

This new swinging panel, together with the James farrowing rail and tilting feed trough, are the biggest improvements ever made on a hog pen.



James Sanitary Hog Pen
(PATENT APPLIED FOR)

James Sanitary Hog Pen

(PATENT APPLIED FOR)

SPECIFICATIONS

CORNER POSTS: $1\frac{7}{8}$ in. O. D. pipe. Used with James Tubular Pen Anchors.

GATE POSTS: $1\frac{7}{8}$ in. O. D. double strength pipe. Used with James Tubular Pen Anchors.

INTERMEDIATE POSTS: $1\frac{5}{8}$ in. O. D. pipe. Used with James Tubular Pen Anchors.

PANEL HORIZONTALS: $1\frac{5}{8}$ in. O. D. pipe. Top and bottom horizontals bolted together with $\frac{7}{16}$ in. cut thread bolts, spaced not more than seven spindles apart.

PANEL UPRIGHTS: $1\frac{1}{16}$ in. O. D. pipe spaced 4 inches on centers.

ANCHORS: James Tubular Pen Anchors $3\frac{1}{2}$ in. O. D. pipe, 9 in. long. Made of 24-gauge steel. Pen anchors are the only part of the pen required at the time the concrete work is done. (See page 234 for illustration.)

FITTINGS: Best annealed malleable. $\frac{7}{16}$ in. cut thread bolts used with fittings for attaching panels to posts.

ORNAMENTS: Best malleable, dust proof type.

GATE: Frame of $1\frac{5}{8}$ in. O. D. pipe with $1\frac{1}{16}$ in. O. D. pipe uprights. All fittings of best malleable. Equipped with double latch and safety lock. Hinges are offset so that gate swings back against pen; of best malleable, half the hinge clamped not only to the gate post but also to the upright next to it; the other half of hinge clamped not only to the gate frame but also to the upright next to it.

FINISH: The steel is first mechanically cleaned, removing scale, grease and foreign matter, then followed with a chemical bath, thoroughly preparing the material for painting; it is then finished with the best gray protective enamel, baked for two hours at a high temperature. (See page 125.)

HEIGHT: With 4 in. curb, pen is 3 feet 8 inches from the floor.

WEIGHT: 25 lbs. per linear foot.

SHIPPED ASSEMBLED IN PANELS

Swinging Panels

(PATENT APPLIED FOR)

FRONT PANEL: Horizontals of $1\frac{5}{8}$ in. O. D. pipe, uprights $1\frac{1}{16}$ in. O. D. pipe. Hinge and all fittings malleable with cut thread bolts. Swinging mechanism best malleable and bar steel.

DIVIDING PANEL: Panels dividing pens are so constructed that when desired, they may be swung up and locked out of the way, thus turning two or more pens into one larger pen.

Farrowing Rail




(PATENT APPLIED FOR)

Made of $1\frac{5}{8}$ in. O. D. pipe; hinge and rail brace of best malleable.

Tilting Feed Trough

(PATENT APPLIED FOR)

Trough is of 18-gauge galvanized sheet steel; ends are locked seamed with reinforcing plates on corners; angle iron dividers across the trough at intervals of 12 inches, riveted to the galvanized sheets. Furnished with device for holding trough down; and with a device for holding trough when raised.

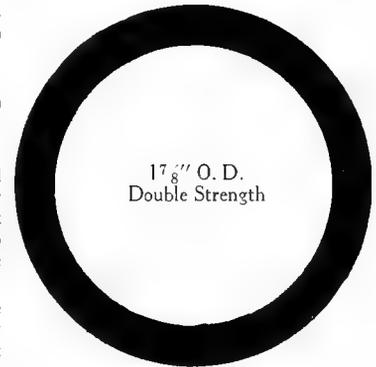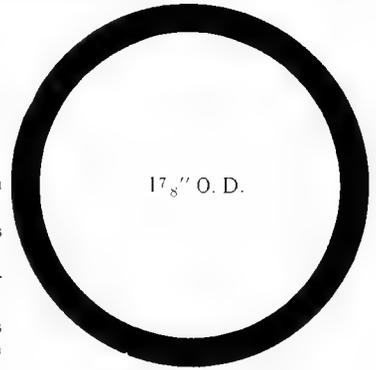

Exact sizes of pipe used



The James Ventilators*



DAIRYMEN, generally, realize the full importance of pure air to the herd, because they know the condition in which an unventilated stable is found on a cold morning.

They know the air in such a barn is bad, and that the damp, frosty barn is an unhealthy place for the cattle.

Not only is such a condition injurious to the stable itself, affecting the walls, rafters, ceiling and equipment, causing wood to rot and metal to rust; but most important of all is the injurious effect of the lack of fresh air on the vitality of the animals.

Without pure air, they are unable to get the full benefit of their food, the milk production is lowered and the cattle are more subject to diseases, such as tuberculosis and pneumonia. The loss of stock in the United States during one year from tuberculosis alone amounted to fourteen million dollars.

The dairyman works hard for six or seven months of the year preparing expensive food in the way of hay and grain for winter use. He cannot afford to feed this expensive food during the winter months and fail to provide the fresh air necessary to properly digest this food and turn it into milk.

A furnace can be filled with expensive fuel, the fire started and a forced draft used, but if the air forced into the furnace does not contain oxygen, the fuel will not burn properly and much will be wasted.

A similar action takes place in the animal's body and unless oxygen is provided by bringing fresh air into the barn, the animal will waste feed just as the furnace would waste fuel, and the milk production will be reduced.

To provide fresh air, a good ventilator is necessary—the ventilator is one of the most important items of barn equipment. But the ventilator alone cannot furnish the pure air.


Ventilation depends on the proper working out of certain scientific rules, and if not correctly done, the system cannot give the best possible results.

The system of ventilating must vary to meet the particular conditions in each barn or building.

The information given in this book is of a general nature, the blue prints shown in the fore part being intended merely as examples, and without any thought that they apply to all cases.

If you purchase James Ventilators, we will, without any extra charge, design a system of ventilation to meet your individual requirements, furnishing blue prints showing the proper size and location of outtake and intake flues, with details of how they should be constructed to obtain satisfactory results.

* NOTE: Pages 53-77 on Ventilation should be studied before reading this section on the "The James Ventilator."

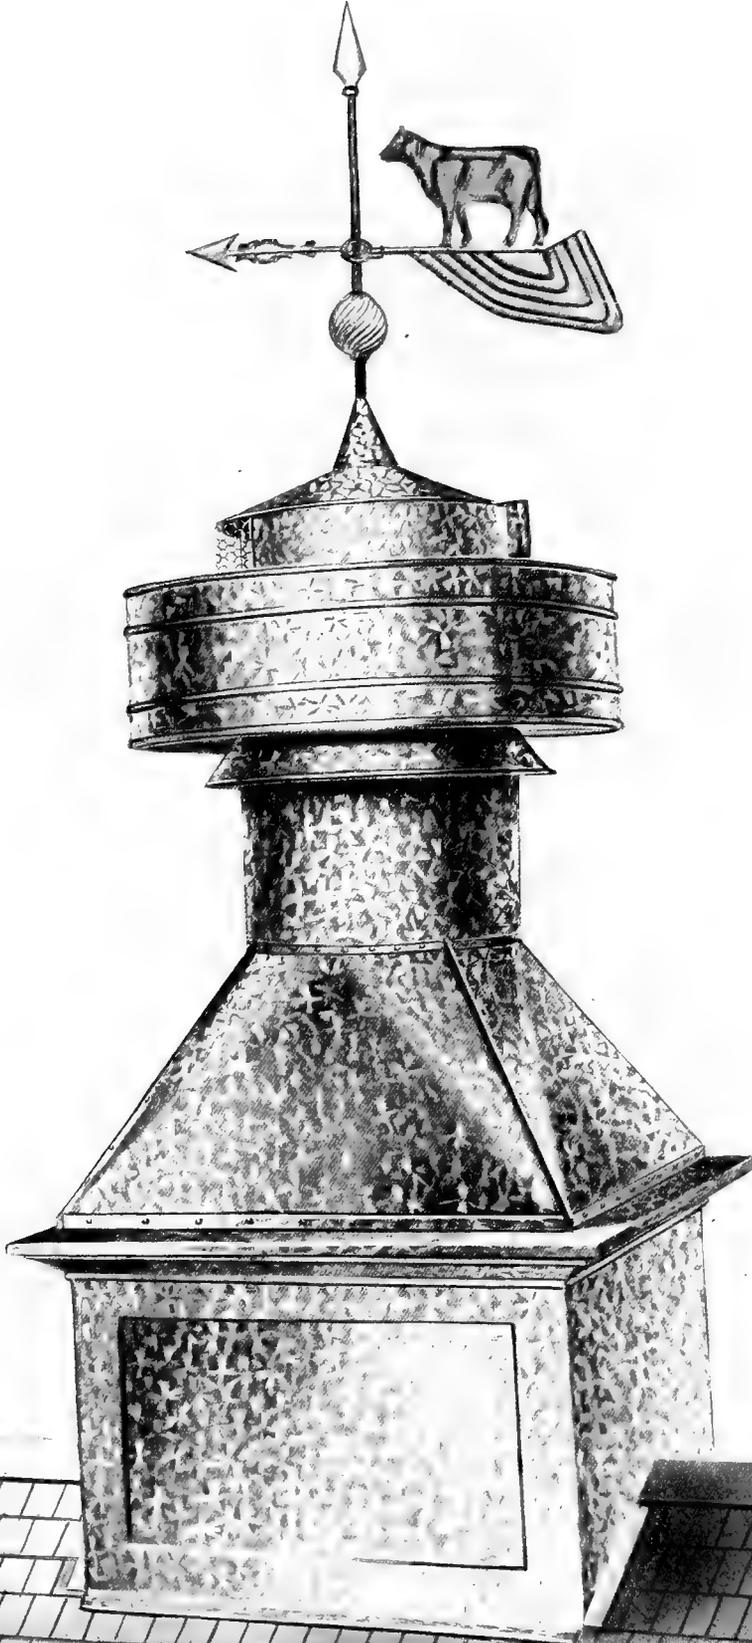

James Ventilator, with Revolving Hood

The dairy barn, of course, is not the only building that requires ventilation. Pure air is just as important in horse stables, hog houses, poultry houses, homes, factories, moving picture theatres, and wherever else human beings or animals may be brought together within the walls of a building. It is needed also for tobacco houses, and buildings of like nature.

To meet these varying conditions, we make James Ventilators in a variety of sizes and of two general types—Solid Hood and Revolving Hood.

The James Ventilator with the solid hood is just as efficient as any ventilator other than the James now on the market for use on dairy barns; indeed, it is more efficient than most of them.

The most efficient type, of course, is the James Ventilator with the revolving hood, because it offers the least resistance to the outflow of foul air, provides greater capacity at the outlet openings, and because it takes advantage of the suction power of the wind to exert a pull on the foul air in the outtake flue.

Actual tests by a competent engineer have shown that the James Ventilator with revolving hood gives 65 per cent better ventilation than the usual wooden cupola and 30 per cent better ventilation than the ordinary ventilator for dairy barns.

This great superiority of the James Revolving Hood Ventilator is due to these three James principles: (1) construction that offers the least possible hindrance to the outward flow of foul air; (2) increasing the outlet space for outflowing air, by addition of outlet space provided by revolving head; (3) the application of *suction* at the proper point to help pull the foul air out.

How these three important principles are combined with the best features of other types of ventilators, at the same time avoiding their disadvantages, can perhaps best be shown by a brief discussion of the principles on which ventilators are constructed, and the reasons why certain features are essential.

A ventilating flue is much like a chimney. But while the same principles apply to both, with a ventilating flue it is necessary to go a step or two further.

A ventilating flue, like a chimney, should be as straight as practicable, higher than the building, of ample size; and airtight to "draw well."

How Ventilating Flue Differs from Chimney

The ventilating flue, however, cannot be left without a cap, as may oftentimes be done with a chimney, and a little thought will make the reason clear.

Rain and snow falling into the chimney do no harm, for the heat is sufficient to vaporize the moisture and the upward current carries it out again.

With a ventilating flue, however, there is not sufficient heat for this purpose, and hence, even were there no other reason, a ventilating flue would need to be capped to protect against the weather.

The foul air, in order to leave an outtake flue not capped with the right type of ventilator, would often have to fight its way directly against counter





Experimental Barn
James Manufacturing Co.

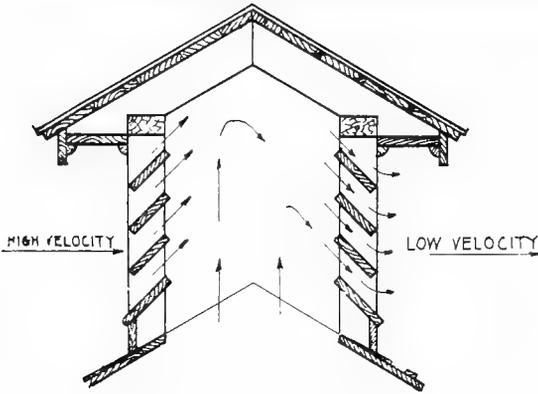


Fig. 5
Wooden Cupola

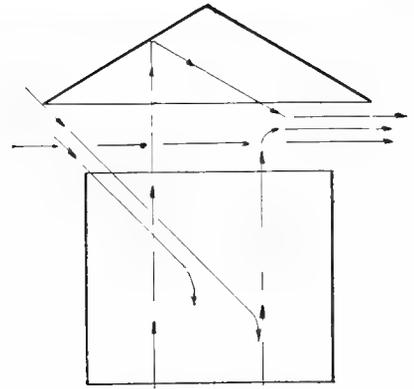


Fig. 6
Metal Cupola—Cap is too high; wind and rain blow in.

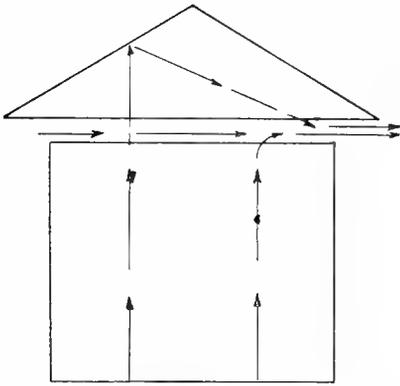


Fig. 7
Metal Cupola—Cap is too low; outflow of air is choked down.

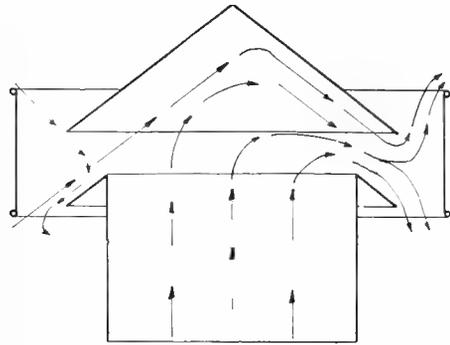


Fig. 8
Metal Cupola with Storm Band.

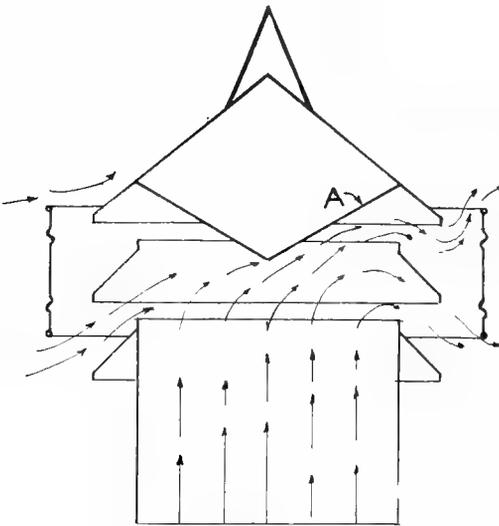


Fig. 9
James Solid Hood Ventilator.

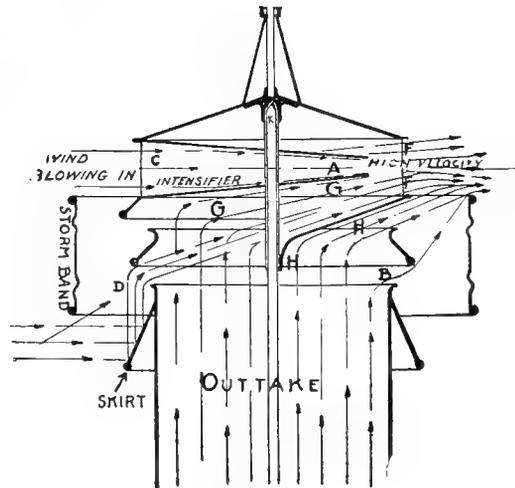


Fig. 10
James Revolving Hood Ventilator.

currents. These outer currents, being stronger, would force the foul air back, down the flue. This would reverse the ventilating system, removing the warmer, purer air instead of the colder, foul air.

The old-fashioned wooden cupola was intended more as an ornament to the barn rather than for the more practical purpose of aiding ventilation, although in building it an attempt was made to keep out the weather.

The wooden cupola, however, seriously interferes with the outflow of air. Usually the total area of the outlet space between the louvres is less than the cross section area of the flue, thus choking down the flow of air.

Besides this interference with the air flow, the air currents, to escape, must make a very sharp turn, as indicated by the arrows in Fig. 5, opposite page, the flow of air almost turning back upon itself.

Then, too, whirling or eddying currents are caused when the wind blows into the cupola and comes into conflict with the upward current of warm air, hindering still further the outflow of foul air.

All together, these restrictions upon the free escape of the air make proper ventilation impossible with the old-style wooden cupola.

The ordinary, locally made metal cupola, is also unsatisfactory, not alone because it is usually made far too small for the amount of foul air to be removed but also because when made weatherproof, the cap must be placed too low, as shown in Fig. 7, slowing down the outgoing current of air. Or if the cap is placed high, the rain and snow and wind drive down the flue, as in Fig. 6.

Both these types of cupolas shown in Figs. 6 and 7 have the fault present in the wooden cupola—that of checking the outflow of air by having to make a sharp turn and by the eddies created when the wind entering from outside combats the upward flow of air in the flue.

To prevent the troubles caused by the wind blowing into the flue, a storm band is ordinarily used as shown in Figs. 8 and 9. This keeps out snow and rain and makes the ventilator almost proof against the wind.

In ventilators other than the James, however, the storm band hinders the outflow of air by forcing the air current to make *two* sharp turns.

Also, the upward current striking the top of the ventilator causes eddies, choking the flue and interfering with the free escape of the foul air. A little wind gets by the under side of the storm band and this, too, creates eddies.

With the James Revolving Hood ventilator, however, the outgoing foul air has a *free outlet* unimpeded by excess friction caused by right-angle turns, by eddies or by being forced back upon itself. (See Fig. 10.)

This is to a large degree true of the James Solid Hood Ventilator; upward moving foul air strikes an upward sloping surface "A", Fig. 9, page 266. In the James ventilator with revolving head upward sloping surfaces at "GG" and "HH" (Fig. 10, page 266), turn the air gently outward and upward.

This makes clear how, in James ventilators, offering the least possible hindrance to outflowing foul air is used to increase the efficiency.

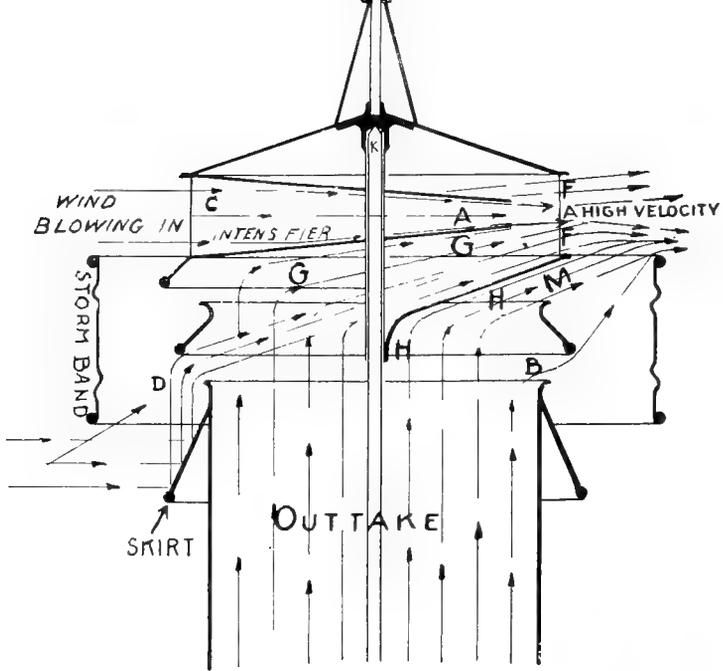


Fig. 2

**James Ventilator with
Revolving Hood**

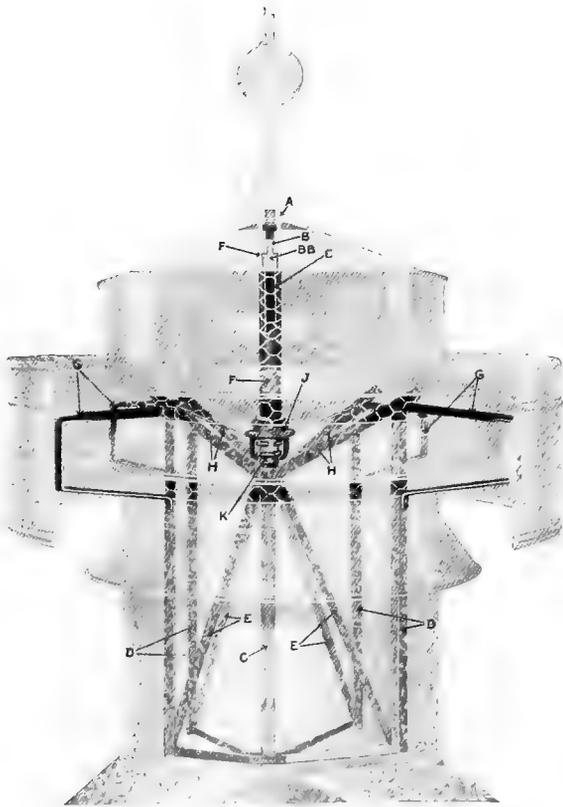


Fig. 3



Fig. 4

The James Ventilator with Revolving Hood

(PATENT APPLIED FOR)

The revolving hood principle adds greatly to the ventilator's capacity to remove foul air.

A study of Fig. 2, page 268, will make clear how the air in one-half of the outtake flue is removed through the usual space between louvres (points "M" and "B"), while the air from the other half of the outtake is removed through the additional outlet space of the revolving head at the point marked "FF". In other words the outlet space has been enlarged as compared with the ordinary type of ventilators.

The James ventilator with revolving hood also takes advantage of the power of suction—it helps pull foul air out of the barn and brings fresh air in.

The top of this Ventilator (the dark portion of Fig. 4) turns on a hardened steel point, like a compass ("K" Fig. 2). The vane "B" (Fig. 4) keeps the opening "C" (Figs. 2 and 4) always toward the wind.

The tapering construction of the "intensifier" ("C-A," Figs. 2 and 4) "speeds up" the wind as it passes through, so that it leaves "A" at high velocity. This creates *suction* in the vicinity of "FF" (Fig. 2) exerting a powerful pull on the air in the outtake flue.

An Interesting Test—Try It

Take a sheet of paper about the size of this page. Roll it in the form of a cone having a diameter of about one-fourth inch at the small end and one inch and a half at the big end.

First, put the little end in your mouth and blow, holding one hand about six inches in front of the big end. The current of air can hardly be felt.

But now turn the paper cone the other way around. Put the big end in your mouth and blow, holding one hand about six inches in front of the little end. A strong current of air will be felt.

In just the same way, the wind passing through the tapering intensifier in the James Ventilator with revolving hood increases in speed and leaves with high velocity at point "A" (Fig. 2).

If you are a smoker, here is another easy experiment which will further illustrate this *suction* principle.

"Hit up" your pipe or cigar until you have a good thick cloud of smoke. Then pucker your lips and blow vigorously into the center of the smoke cloud. Not only the smoke directly in the path of the current of air is removed, but the surrounding smoke is also sucked into the current and carried away.

Just so the higher velocity at point "A" creates suction, carrying the surrounding air with it. As this surrounding air is warm moist air from the outtake flue, the air removed by the suction is constantly replaced by more air from the flue, thus speeding up the outflow of foul air and increasing the amount removed in a given time.



Note improved appearance of barn by use of James Ventilators

It is very much the same principle as that of the ejector in a steam engine.

Another illustration in point is the suction created by the rapid movement of a train or an automobile. Watch an express train passing by and you will see a cloud of dust and light weight-refuse, such as scraps of paper following.

In the same way the velocity of the air leaving the intensifier at "A" carries the surrounding foul air with it.

The foul air removed from the barn is, of course, at once replaced with pure air from out of doors, through the fresh air intakes.

The slightest breeze will turn the ventilator top, and a very light breeze blowing through the intensifier will create some suction.

Aviators have found that even when there is no wind or air movement apparent to a man on the ground, there are nevertheless currents of air in constant motion. Hence the James Revolving Hood Ventilator is always at work helping to remove foul air.

Every system of ventilation depends for its efficiency on the thoroughness with which foul air is removed and fresh air brought in to take its place.

The motive power on which other systems depend for a continuous upward current in the foul air flues, is a difference in temperature between the air in the stable and the air out of doors.

Or in other words, they depend upon the air in the stable being lighter (warmer) than the outside air.

The air in the stable being warmer, the air at the inside opening of the outtake flue will be lighter than the air outside and will rise.

The upward movement of air in the flue started in this manner is assisted to some extent by "aspiration"—that is, by the wind blowing across the top of the flue; just as a chimney has a stronger draft when the wind is blowing.

But where dependence is placed wholly on the motive power furnished by the warmer (lighter) air and by the wind blowing across the top of the outtake, the ventilating system will sometimes not operate satisfactorily in the warmer weather and under certain atmospheric conditions.


The James Improved Ventilating System is more efficient because it not only uses the same motive forces employed in other systems, but it adds the additional motive power of *suction*, applied at the outlet of the foul air flue.

It removes a greater quantity of foul air in a given time and makes the ventilation more uniformly successful under all conditions.

The James Ventilator, as before stated, offers little hindrance to the outflow of air, the air current having to make but one turn and that of large radius much less than a right angle (see "GG" "HH," Fig. 2).

The deflector in the shape of a half cone "HH" (Figs. 10 and 4) prevents outflow of air in that half of flue interfering in any way with the other half.

The little wind which can blow in, when an upward slant of wind strikes the ventilator must blow directly through and out (see D-G-G, Fig. 10).

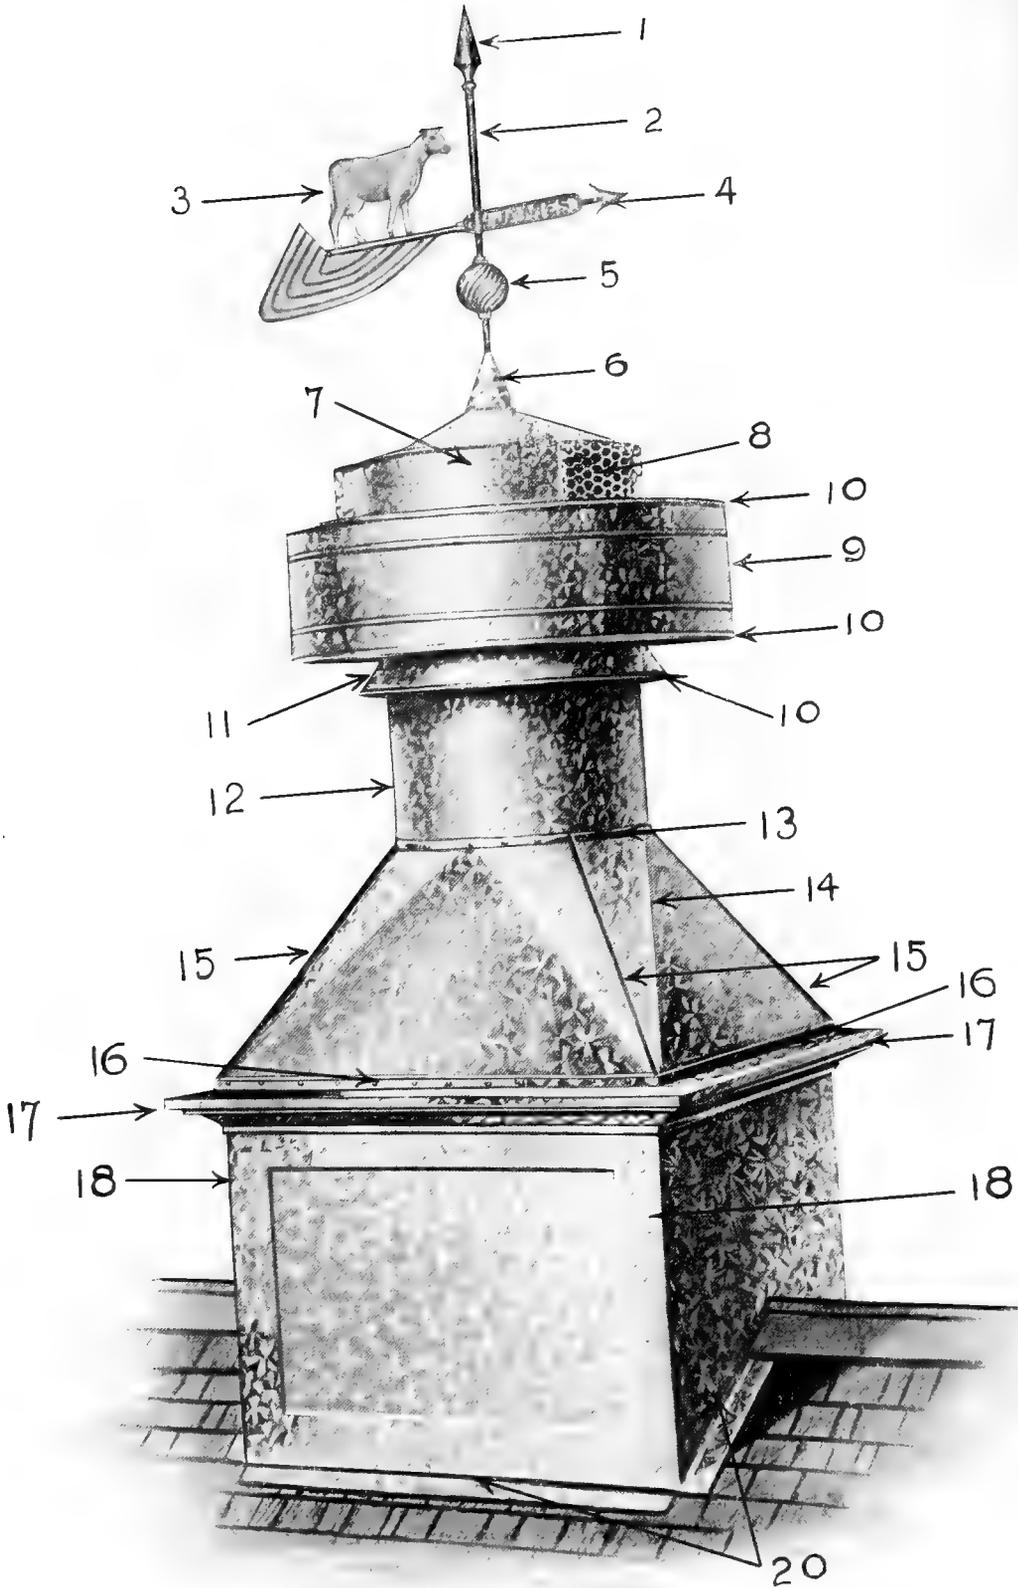

This adds the direct pressure of the wind to the other motive forces, further accelerating the outward flow of air, instead of impeding it by causing eddies as in Fig. 8.

Thus we see that the James Revolving Hood Ventilator has for its motive forces, (1) the difference in temperature between the air in the flue and the air out of doors; (2) "aspiration"—the wind blowing across the top; (3) *suction* applied at the outlet; and at certain times (4) wind pressure. And, as compared with other ventilators, it has a larger outlet space for the outflowing air—unimpeded by sharp turns or obstructions.

The James Ventilator is absolutely storm proof—neither snow nor rain can enter; nor can birds get in, all openings being covered with galvanized bird proof netting as shown in Fig. 3, page 272.

The James Ventilator lasts a lifetime; does its work without attention; interferes in no way with hay carrier track; and is easy to put in place.

Good Looking Barns

The James Ventilator is the finishing touch that makes the barn good looking. See page 270.

There is real value in a good-looking barn, for pleasing buildings increase the desirability of the place, give passers-by a better opinion of the owner, and assure a better price for the farm when you sell.

The ventilator is worth its cost, if only for the increase in selling value of the farm caused by the better appearance of the barn.

Sizes and Construction

Made in two sizes, having barrels 24 inches and 30 inches in diameter.


The heights are 12 ft. 3 in. in the 30-in. diameter; 10 ft. 8 in. for the 24-in.

The 24-in. ventilator has a base 50 x 50 inches over all on cornice by 27 inches high; weight of base 58 lbs. The 30-in. ventilator has a base 60 x 60 inches by 33 inches high; weight of base 99 lbs.

SPECIFICATIONS

(See Page 272)

1. Double cone steel top, solidly fastened on.
2. Galvanized pipe $1\frac{1}{16}$ -inch outside diameter. This pipe passes into cone 6, to which it is securely soldered, and is also threaded into a malleable casting mounted inside of revolving hood (7).
3. Full bodied, double strength stamped zinc. Vane securely fastened to pipe and always keeps opening (8) to the wind.
4. Malleable Arrow.
5. Glass ball five inches in diameter. Extra heavy.
6. Heavy galvanized cone, adds to appearance, strengthens pipe which carries vane.

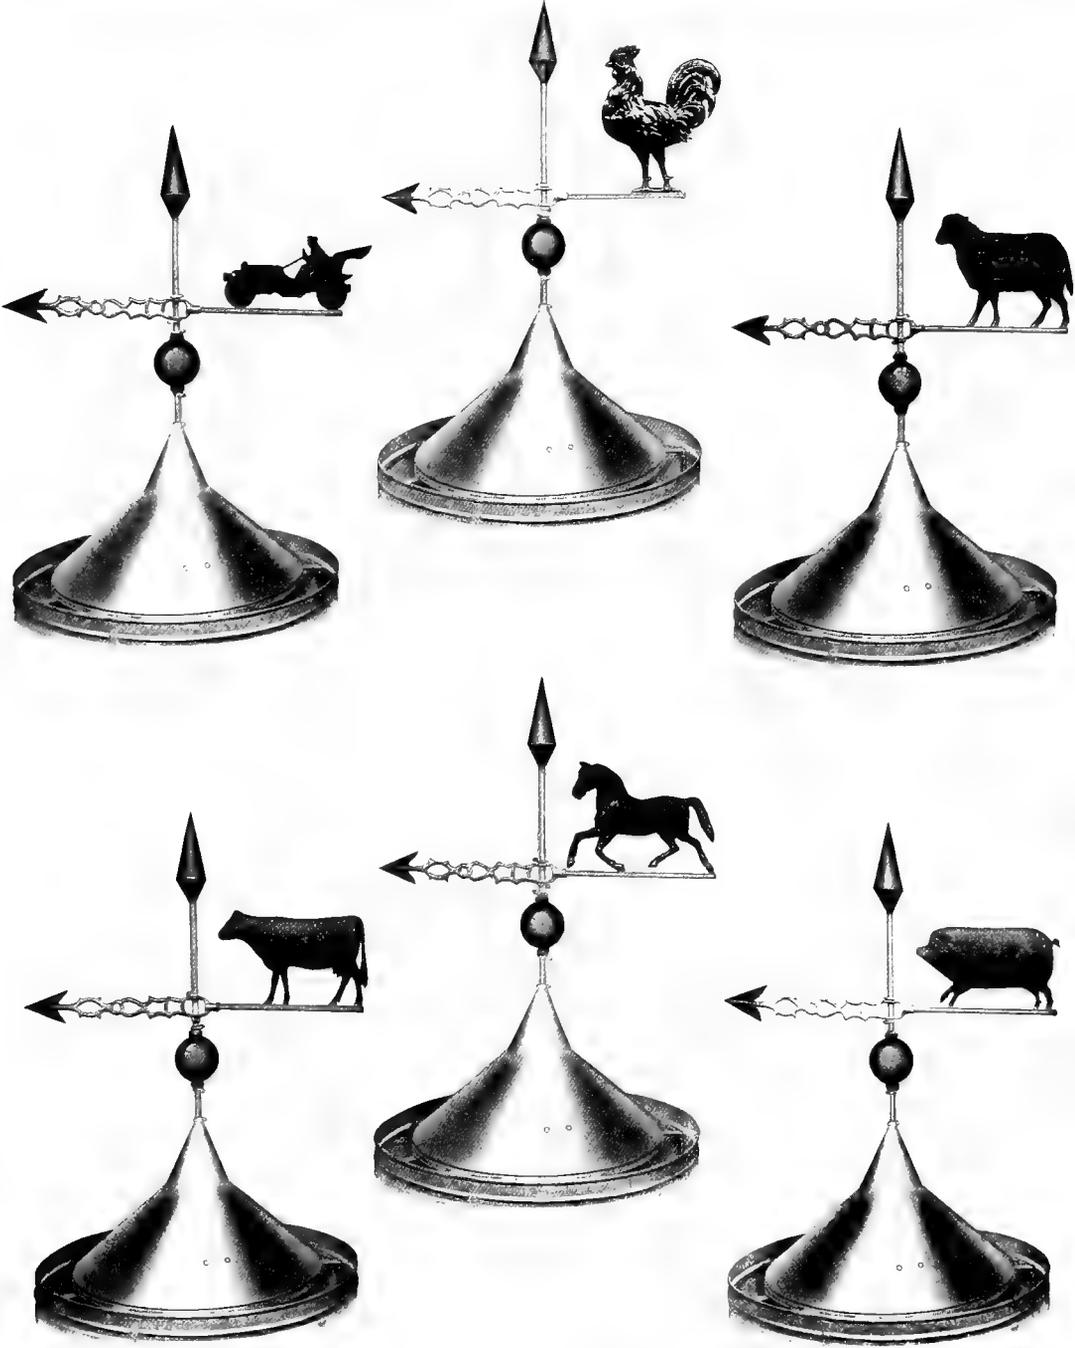

Figures for James Ventilator Vanes

7. Revolving hood, containing intensifier and hardened steel frictionless bearing. This bearing is entirely protected from the elements and no rain, snow or ice can interfere with the motion of the hood. 8. Opening into intensifier.

9. Heavy galvanized storm bands, stiffened greatly by ornamental beading. This band with skirts inside keeps out rain and snow.

10. Heavy steel wiring, amply strengthening storm band and all skirts.

11. Skirt greatly assists in aiding the circulation of air.

12. Heavy galvanized steel body strengthened by galvanized steel angle irons which are thoroughly braced. (See Fig. 3, page 272.)

13. Special alloy non-corrosive rivets, used throughout entire structure.

14. Heavy galvanized steel body strengthened by standing seams (15).

16. The fastening at this point is the strongest possible, extra heavy galvanized angles to which the body is securely bolted by special non-rusting bolts and nuts.


17. Heavy galvanized steel cornice, made by us from our own designs.

18. Corners are made from extra heavy galvanized steel. Folded and locked into side and top sheets to form a solid and tight structure.

20. Galvanized steel flashing, so constructed as to leave the least work for the workman placing the ventilator on the roof.

Four long bolts, with nuts and washers, are furnished to bolt ventilator to the roof. All openings are protected by galvanized bird-proof netting.

Lightning rods should be coursed around the ventilators—never through a ventilator. A bond should be made between the rod and ventilator, preferably by soldering rod to outside corners of base, making a permanent positive metal contact.

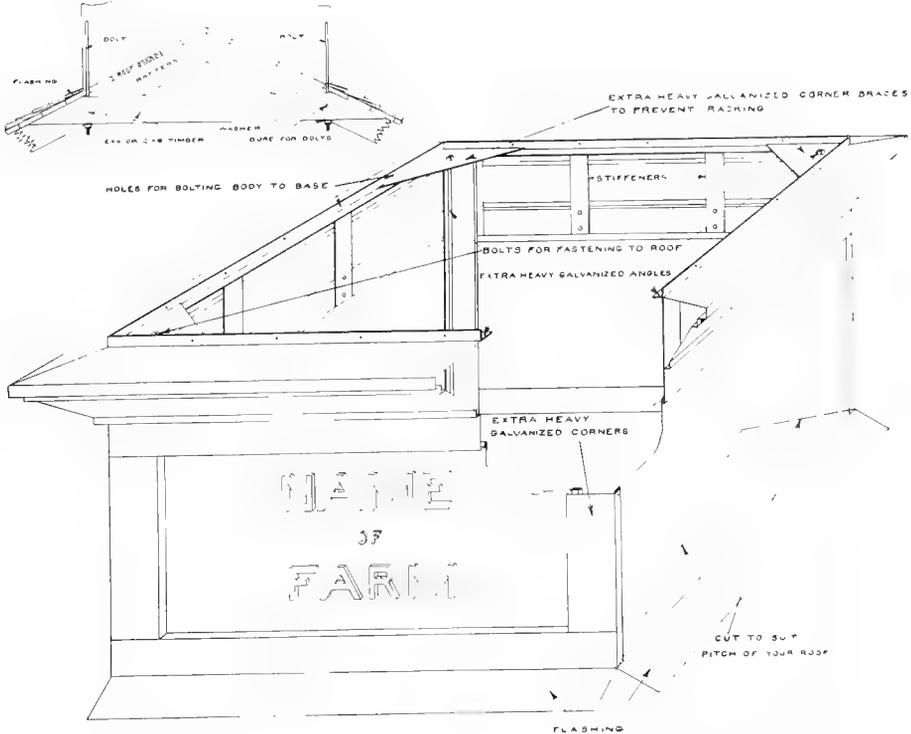



James Ventilators with Solid Hood

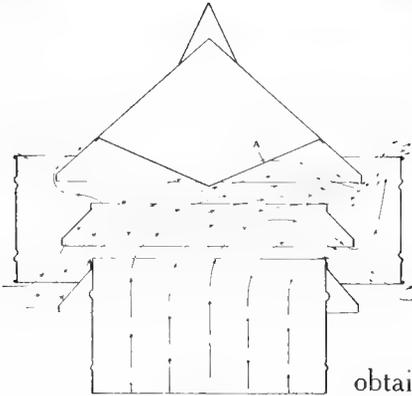


Fig. 1
James Solid Hood Ventilator

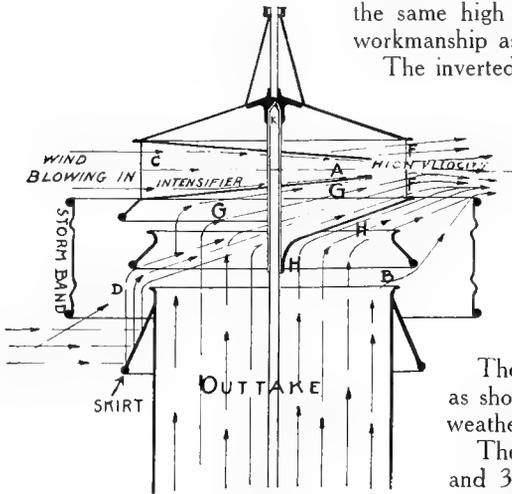


Fig. 2
James Revolving Hood Ventilator

These ventilators differ in principle from the James Ventilator with revolving hood only insofar as the inverted cone is substituted for the revolving top.

The ventilators without the revolving hood are, of course, somewhat less efficient because the larger outlet space of the revolving head and the added motive power of suction obtained through the intensifier is not used.

Nevertheless they are very efficient ventilators—more so than any other ventilator now on the market for dairy barns.

They are built on strictly scientific principles, made of the same high quality materials and of the same class of workmanship as the James Ventilators with revolving hood.

The inverted cone "A", Fig. 1, turns the air rising from the outtake flues outward and upward. There is no opportunity for the outflowing current of air to turn back upon itself, cause eddies, choke the flue, or interfere in any way with the free escape of foul air. The storm band and the skirts keep out snow and rain and make the ventilator proof against the wind.

All openings are protected by galvanized bird-proof netting.

The 24-inch and 30-inch ventilators with base as shown in Fig. 4, page 278, are furnished with weather vane.

The ventilators with bases shown in Figs. 1, 2 and 3, page 278, will be furnished with weather vane if desired at an extra cost. Any of the six figures shown on page 274 may be selected. The cow figure will be furnished unless another style is

specifically ordered. Any name or date will be stenciled on a ventilator base for \$1.00 additional.

Size of James Ventilator to Buy

Size	WITHOUT REVOLVING HOOD			WITH REVOLVING HOOD		
	Cows	Horses	Hogs	Cows	Horses	Hog
12"	4	3	10			
18"	9	7	24			
24"	15	12	42	17	13	48
30"	23	18	64	26	20	72

Length of Building

(Building not over 36 ft. wide)

1 to 35 feet.....	One 24 inch	101 to 125 feet.....	Three 24 inch
36 to 50 feet.....	One 30 inch or two 24 inch	126 to 150 feet.....	Three 30 inch or four 24 inch
51 to 75 feet.....	Two 24 inch	151 to 175 feet.....	Four 24 inch
76 to 100 feet.....	Two 30 inch or three 24 inch	176 to 200 feet.....	Four 30 inch

Fig. 2
 Sizes 12, 18
 and 24 inch

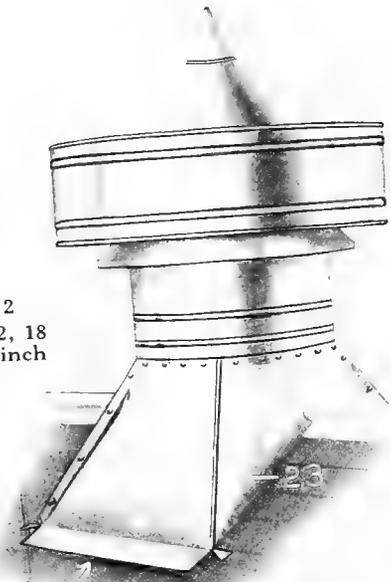




Fig. 3
 Size 12 inch



Fig. 1
 Sizes 12 and
 18 inch



Fig. 4
 Sizes 24 and
 30 inch

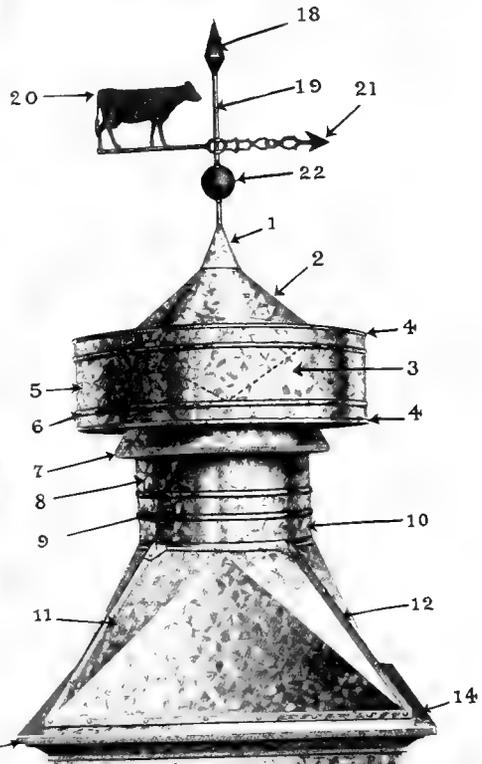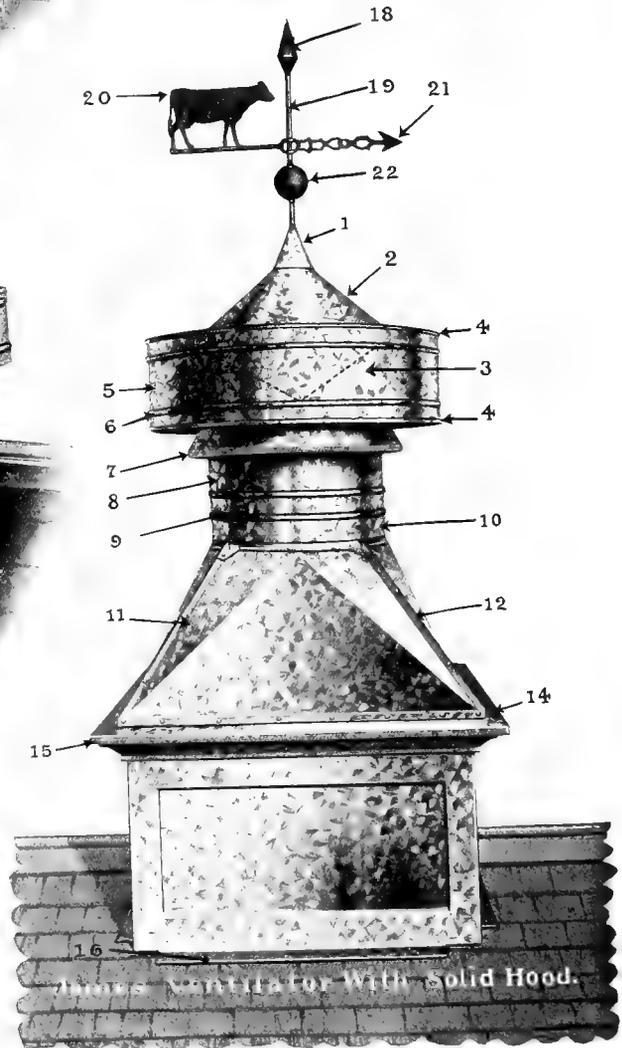

James Ventilators with Solid Hoods

SPECIFICATIONS

(See Page 278)

Applying to Figures 1, 2, 3 and 4

1. Heavy galvanized finial.
2. Heavy galvanized cone.
3. Inverted inner cone. Turns air currents out and up. See Fig. 1, page 277.
4. Heavy steel wiring amply strengthening storm band, on sizes above 18-in. diameter.
On sizes 18-in. or less, edge of storm band is folded and compressed.
5. Heavy galvanized storm band. This band with skirts inside to keep out rain and snow.
6. Heavy beading stiffening and strengthening storm band.
7. Skirt greatly assists in aiding the draft.
8. Heavy galvanized upper round body.
9. Special bolts and nuts for fastening upper round body to lower round body.
(Round body can be lengthened by inserting the desired length of tube at this joint.)
10. Heavy galvanized lower round body.
11. Special alloy non-corrosive rivets used throughout the entire structure.
12. Standing seams used to strengthen body.

Applying to Figures 1, 2 and 3 only



13. Galvanized flashing, so constructed as to leave the least work for the workman when placing the ventilator on the roof.
23. Heavy galvanized combination lower body and base used in mounting ventilator on flat roofs or on ridge of pitched roofs.
24. Heavy galvanized combination lower body and base used in mounting ventilator on side of roof.
25. Heavy galvanized lower body and base used in mounting ventilators on round barns and silos.

Applying to Figure 4 only

14. Heavy galvanized steel cornice, made by us from our own designs.
15. Corners made from extra galvanized steel. Folded and locked into side and top sheets to form a solid and tight structure.
16. Galvanized steel flashing so constructed as to leave the least work for the workman in placing the ventilator on the roof.
18. Double cone steel top, solidly fastened on.
19. Galvanized pipe $1\frac{1}{16}$ -in. outside diameter. This pipe passes into cone 2, to which it is securely soldered, and is also threaded into a malleable casting mounted inside of cone.
20. Full bodied, double strength stamped zinc.
21. Malleable arrow.
22. Glass ball, five inches in diameter. Extra heavy.
Four long bolts complete with nuts and washers are furnished to bolt ventilator to roof.





Window Ventilator

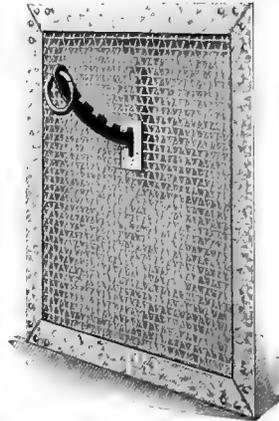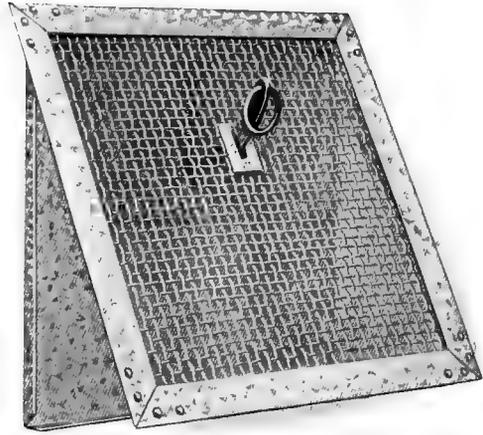

James Registers



James Drain

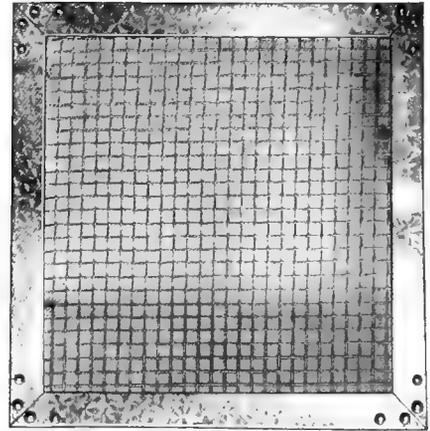

Adjuster for Outtake, Length 18 inches

Miscellaneous Barn Equipment

James Window Ventilators

For use where the fresh air enters the barn through the windows. The windows are hinged at the bottom; James Window Ventilators when the windows are tilted in, throw the fresh air up against the ceiling, diffusing it and prevent the air entering the stable at the sides of the open windows.

Furnished with a device that permits locking of the window in any of five positions; this holds the window solid and prevents the wind from knocking it back and forth.

James Registers

(For Intakes Only)

The James registers are designed specifically for barn ventilation purposes. Registers made of cast iron have two serious objections: the metal takes up too much room in the opening, cutting down the effective area; in the second place the cast iron registers are too quickly affected by the moisture usually found in the dairy stable.

The wire mesh of the James register gives far greater effective opening and the register being galvanized throughout is not affected by moisture. In twenty-four hours, twenty cows will throw off moisture equal to almost one barrel of water; this shows how important it is that the registers be galvanized.

The complete register is equipped with a "tell-tale" device that permits fastening the register open in several positions; a glance down the row of registers at the tell-tales shows which registers are open and how much.

Register faces (designed for outside intakes only) are regularly furnished 8 in. x 8 in., 10 in. x 10 in., 6 in. x 14 in., 8 in. x 14 in., 10 in. x 14 in., 14 in. x 14 in.

The complete registers are furnished in sizes: 8 in. x 8 in., 10 in. x 10 in., 14 in. x 14 in.

The 14 in. x 14 in. complete register is recommended for use where the intake flues open into the stable—that is, in the ceiling or side wall near the ceiling. This size being larger than the intake flues, reduces the high velocity of the incoming air, drafts are lessened and better diffusion of the fresh air secured.

The 8 in. x 8 in. and 10 in. x 10 in. registers are intended for concrete, brick and hollow tile wall and under conditions where there are but a few head of stock.

James Drain

For convenience in draining the manger and gutters when barn is being flushed or washed out. These drains should not be used for the purpose of removing liquid manure. Special traps of much greater capacity should be purchased for that purpose.

Made of cast iron, with ground brass cap to prevent any leakage with a cast iron screen, which may be readily removed for cleaning. Hole is four inches in diameter.

Adjuster

Adjuster for opening an outtake flue. (See illustration, page 280.)



Detail of James
Steel Column
Red-Granite
Filled

Waukesha County Asylum Barn
Waukesha, Wis.

The James Composition Columns

Every man these days wants steel stalls and would not think of putting in wood stalls in a new barn. The steel column has every advantage over wood columns that the steel stalls have over the wood stalls.

In the two-story barn of the usual width, the second floor must be supported either by trussing from above or by columns below. Ofttimes too, columns are needed in one-story barns to support the ceilings. There is absolutely no objection to columns in the stable providing they are of the right kind and properly located.

The James Composition Columns overcome all the objections to the old-style wood columns. They have strength with neatness—the wood columns to have equal strength must be three times the size.

Light in the dairy barn is of the greatest importance—for light kills disease germs; it is the best disinfectant. The heavy wood supporting columns tend to keep the light out; James columns, because of the smaller size, let the daylight in.

The wood columns collect dust—the cracks and rough surfaces offering refuge to countless germs. The surface of the James columns is a smooth enamel coat—no place for dust and germs.

The appearance of the James columns harmonizes with modern steel stalls and pens; the cost of the columns is justified for appearance's sake alone.

The saving in space by the use of the James columns is very considerable. Where a heavy wood support may reduce the width of one or two stalls, the James columns so fit in with the stalls or pen that no room is lost, nor any discomfort caused the animals. The 4½-inch James column, for example, has a safe carrying capacity equivalent to an oak or a yellow pine post 6 in. x 8 in., or a white pine post 8 in. square.

The 4½-inch James column has a cross section of 15.9 inches as compared with 48 square inches cross section of the oak or yellow pine post and 64 square inches of the white pine post.

From this it will be seen that the James column of equal strength takes less than $\frac{1}{3}$ the space occupied by the wood column. At the same time, the James column has less than half the surface of a wooden column of equal strength, which is an item worth consideration when it comes to painting or cleaning.

It is no longer necessary to use wood columns at the rear of horse stall partitions. James columns fitted with iron channels may be used to hold the partitions. The use of the James columns with the horse stall makes it possible to give the stable a uniform appearance.

Wood columns set on cement floor ofttimes rot out in three or four years. The frequent replacement of wood columns under these conditions makes the James columns cost far less in the long run.

James columns are less expensive than the trussing required if columns are not used—at the same time the haymow is clear of obstruction. They cost less than cast iron, are stronger, and less liable to break in handling.

When arranging your floor plan, it is important that the supporting columns be correctly spaced. Otherwise, the location of the columns, whether of wood or of steel, may interfere seriously when you come to put in stalls and pens. If you will write us, we will tell you how best to locate the supporting columns in your barn. State inside dimensions of the stable and number of animals to be provided for.


James Composition Columns are made up of new cold-drawn, seamless, high-pressure boiler tube, straight and clean as a new gun barrel. They are filled with a secret

formula, the main ingredients of which are red granite, torpedo washed sand and Portland cement.

Beware of columns not properly filled. Concrete shrinks in hardening and tends to leave a slight space next to the steel shell, weakening the strength of the column. The James process of filling the columns offsets this shrinking tendency, as well as avoiding air pockets and sponginess which would give rust a chance to attack the column from the inside.

Prices on James Columns should not be compared with columns made from inferior materials; or from second-hand boiler tubes, because of the danger of such tubes having rusted thin in spots.

Furnished regularly in the sizes given in the following table:



Comparison of space occupied by 6 x 6 white pine post and a James column of same weight carrying capacity.

Table of James Columns, their Capacities and Equivalents in Wood Columns

Outside Diameter	Safe carrying capacity in tons of James Steel Columns					EQUIVALENT TO		
	6 Ft. Length Tons	7 Ft. Length Tons	8 Ft. Length Tons	8½ Ft. Length Tons	9 Ft. Length Tons	White Pine	Yellow Pine	Oak
3½-in.	9	8½	8¼	8	7½	6x 6 in.	5x5 in.	5x5 in.
4½-in.	14	13½	13	12¾	12½	8x 8 in.	6x8 in.	6x8 in.
5 -in.	20¼	20	19½	19¼	19	8x10 in.	8x8 in.	8x8 in.

The James Milk Stool

Here's the milk stool that every farmer wants.

It is just the right size and weight, neat and handy, with a comfortable wood seat for warmth in cold winter weather. The wide-spread, well-braced legs give firm footing. It is sanitary, and easily kept clean.

Built to last for many years.

It's a handy little seat to have around for other purposes, too—as an extra seat in buggy, wagon or automobile, and for use about the house and barn at tasks that permit sitting down.

If the stool is not perfectly satisfactory, you may return it, and your money will be refunded.



SPECIFICATIONS


LEGS: Of $\frac{1}{4}$ x 1 in. bar steel, tied together by a circle of the same material, well riveted.

SEAT: Of seasoned birch, attached to a galvanized sheet by screws. Seat attached to the legs by bolts passing through legs, galvanized sheet and the wood; bolt heads countersunk in the wood seat. Wood stained mahogany and covered with oil glaze. Legs and circle painted.

SIZE: 12 inches high. Diameter of seat 9 inches; thickness 1 inch. Weight approximately 5 pounds. May be shipped by parcel post, express or freight, as preferred.

James Hog Trough

(PATENT APPLIED FOR)

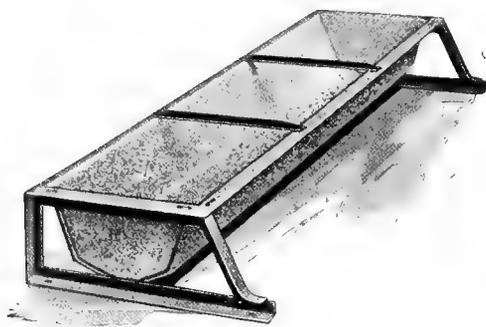

Clean water and sanitary feed are necessary for the good health of hogs. The James Hog Trough is easy to clean and easy to keep clean. It is so designed that the hogs may get all the liquid. If any liquid should be left in the trough in cold weather, no damage will be done to the trough because of its V-shaped bottom and flaring sides, for the expansion of the forming ice will be upward and not against the sides.

The trough is built of 18-gauge galvanized sheet steel, ends are lock seamed, with reinforcing plates on the corners; angle iron dividers across the trough at intervals of 12 in., riveted to the galvanized sheets. These angle iron dividers are so strong that a man can stand on them without bending them; they not only give the trough great rigidity and strength so that it cannot wrack, but they also separate the hogs, keeping any one hog from monopolizing the entire trough. Hogs can't tip the trough.

The legs of the trough are of angle steel, fastened to the trough with heavy rivets. Vertical legs on one side in order that the trough may be backed up against a wall.

The James Trough is the most economical trough to buy, as it costs but little more than a wooden trough and will outlast many built of wood.

James Alley Gate

This gate is very convenient and useful to prevent cows getting into the feeding alley, when they are entering the barn or being turned out.

The gate locks when slammed shut, but may be opened quickly and easily. When not needed, gate may be swung out of the way.

Built of $1\frac{5}{8}$ -in. O. D. pipe, with $1\frac{1}{8}$ -in. O. D. uprights. Fittings of best malleable. Gravity latch. Malleable offset hinges. Finished in battleship gray.

Gates furnished any size desired, up to 4 feet 6 inches wide. For wider alley, alley chains should be used.

When ordering alley gates, kindly give the exact distance of space to be filled. Measure from center to center of stall end uprights if there are stalls on both sides of alley; measure from stall end upright to wall if alley is at end of barn next to a wall.

If possible, send a small sketch showing location of gate and giving dimensions.


Also state if gate is to be hinged on $1\frac{5}{8}$ -in. O. D. or $1\frac{7}{8}$ -in. O. D. pipe, and if extra parts are to be furnished with gate.



James Alley Gate

James Alley Chains

When ordering specify to what chains are to be attached, length desired, and number of chains required.

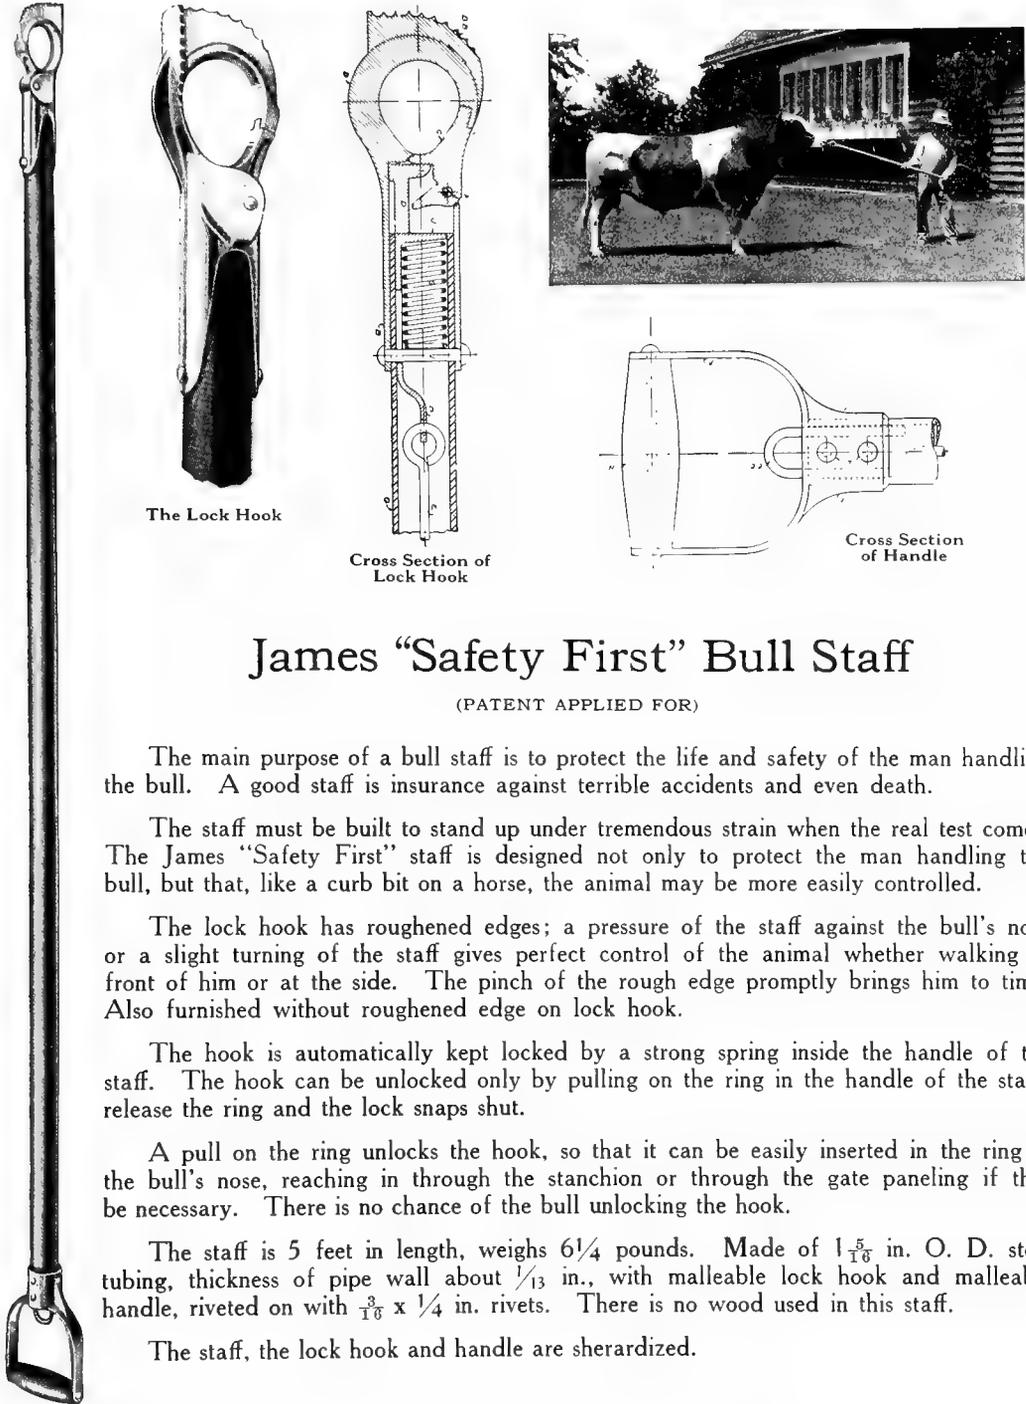

The Lock Hook

Cross Section of Lock Hook

Cross Section of Handle

James "Safety First" Bull Staff

(PATENT APPLIED FOR)

The main purpose of a bull staff is to protect the life and safety of the man handling the bull. A good staff is insurance against terrible accidents and even death.

The staff must be built to stand up under tremendous strain when the real test comes. The James "Safety First" staff is designed not only to protect the man handling the bull, but that, like a curb bit on a horse, the animal may be more easily controlled.

The lock hook has roughened edges; a pressure of the staff against the bull's nose or a slight turning of the staff gives perfect control of the animal whether walking in front of him or at the side. The pinch of the rough edge promptly brings him to time. Also furnished without roughened edge on lock hook.

The hook is automatically kept locked by a strong spring inside the handle of the staff. The hook can be unlocked only by pulling on the ring in the handle of the staff; release the ring and the lock snaps shut.

A pull on the ring unlocks the hook, so that it can be easily inserted in the ring in the bull's nose, reaching in through the stanchion or through the gate paneling if that be necessary. There is no chance of the bull unlocking the hook.

The staff is 5 feet in length, weighs 6¼ pounds. Made of 1 ⁵/₈ in. O. D. steel tubing, thickness of pipe wall about 1/13 in., with malleable lock hook and malleable handle, riveted on with 3/8 x 1/4 in. rivets. There is no wood used in this staff.

The staff, the lock hook and handle are sherardized.



James Barn Scrapers

At last, you can obtain a floor scraper that will actually clean the floors.

The home-made scrapers and those which have been placed on the market heretofore chatter, jump and slide over the manure. They don't hug the floor.

The design and shape of the James Scraper is such that it gets right down under the manure and clings to the floor. No matter whether you push down hard or shove it gently, it sticks to the floor. The harder you push, the deeper it digs. It is correct in principle.

For cleaning the walks and floors back of the cows and concrete barn yard, the James Scraper is unexcelled. Its great width of straight edge makes quick work of this job. It does work that cannot be done satisfactorily with a shovel, taking off all the dirt and leaving the cement floor clean so that cows are not liable to slip as they come in or leave the barn.

The 15-inch width scraper is designed for use in the gutters, which usually are built 16 inches wide.

The James scraper is also unexcelled for removing packed snow or ice from cement walks, and for the cleaning of city pavements.





from binding. Castings of best malleable, heavy design; large bolts used to fasten the handle to the form. Handles are of second-growth ash thoroughly seasoned, tough, strong and smooth.

Manger cleaners are made in two styles regularly, one to fit the trough of the James complete manger, the other to fit the trough where James manger divisions are used; specify which is wanted when ordering.

Manger cleaners will be made to fit any form at a slight additional cost.


The floor scraper blades are made of high carbon shovel steel and will wear a long time; castings of best malleable riveted to blades by powerful pressure and bolted to handle; handles of second-growth ash thoroughly seasoned, tough, strong and smooth. All metal parts given a coat of black paint. Made in 24-in. and 15-in. widths.

James Manger Cleaner

The manger cleaner is so shaped as to fit the manger trough, and the trough can be cleaned of refuse about as fast as a man can walk. The handle is set at an angle so that it is not necessary to reach under the mangers.

The form is made of thoroughly seasoned birch, equipped with a steel roller on the end that works against the curb, which makes it easy to operate, and prevents cleaner



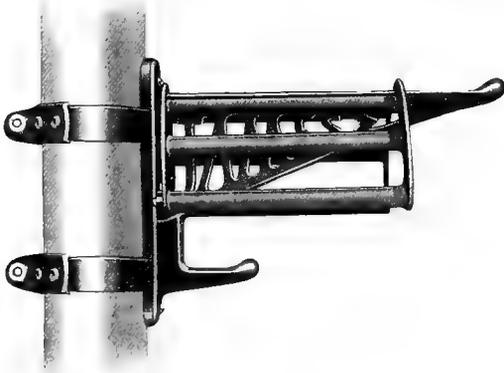


James Harness Hooks

How often one goes into a barn where the harness is hung over the ordinary hook and finds that the collars and back pads are broken! The James harness hook with saddle keeps the collars and back pads in proper shape and adds to the life of the harness.

The harness hooks are furnished with or without saddles; for barn walls or wood columns; and with fittings for steel columns of any diameter. Harness hooks are carried in stock for columns $3\frac{1}{2}$ in., 4 in., $4\frac{1}{2}$ in., and 5 in. in diameter; other sizes made to order.


Made of best malleable. Size: $11\frac{3}{4}$ in. long.

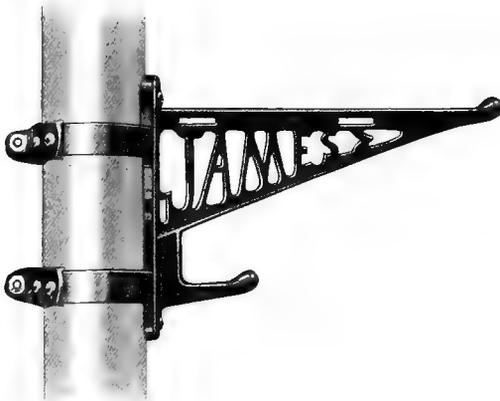

Fittings for Milking Machine

Any of the milking machines can be readily attached to James stalls. The James fittings for this purpose make a sanitary and good looking job and do not interfere with the operation of either stalls or milkers.

We are prepared to furnish any special fittings required for the purpose. Write for further information, stating name of milking machine.

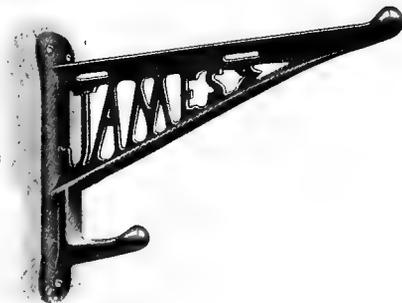

James Name Plate

Any dairyman who takes pride in his individual cows, their pedigrees or their records, will find the James Name Plate the most convenient of places on which to display such data; it is also very useful for memoranda relating to the particular cow to whose stall the name plate is attached, such as instructions for feeding.



Easily and quickly attached to either the steel or the wood stalls, or to the cow pens or bull pens. When ordered for pens, size of pipe to which the name plate frame is to be attached must be given, in order that proper clips may be sent.

BIKE	No.	DAM
NAME _____		
BORN _____		
7 DAY RECORD	MILK	YEAR RECORD
AGE _____	BUTTER _____	AGE _____
Yes _____	Yes _____	Yes _____
Test _____	Test _____	Test _____
Protested	Good	

Illustration "B"

The James Name Plate adds the finishing touch to the stall or pen, just as the speedometer does to the automobile, and is a convenience for the attendants.

The plate which we furnish with the frame is black, entirely blank and may be written upon with a slate pencil, the same as you would write upon a slate. The writing may be erased and re-written.

At slight additional cost, we will furnish this name plate printed as shown in illustration "B."

If preferred, we will furnish a name plate of blank cardboard with two pieces of transparent celluloid instead of the black plate.

Finished in battleship gray enamel, baked on.

State whether to be used on stalls or pens and to what it is to be attached—wood or steel. If steel, give size and state whether round or square.


James Paint

Barn equipment should be given some care, the same as other machinery, if it is to be kept in perfect working order and give the maximum length of service.

It is a good thing to give the equipment a coat of paint once every year or two, as this will prolong the life of the equipment and keep it looking new; the cost is very little.

The paint we offer for this purpose is the same quality as that used when the enamel is baked on at the factory, excepting that a metallic dryer (not japan) is added to the paint so that it will air dry.

This paint is the best gray protective enamel made especially for us under our own formula, based upon a thorough investigation, numerous tests and research work for the best enamel to be used on dairy barn equipment.

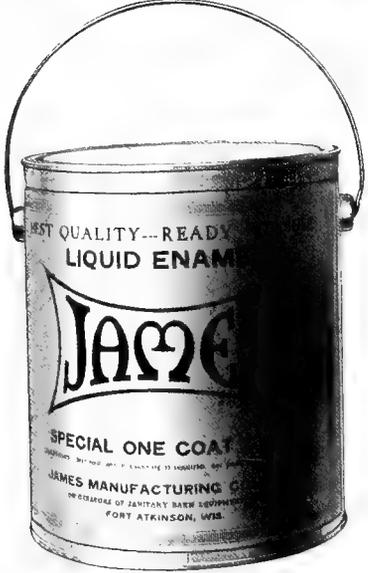




Dairy Scales

The large circular dial has distinct black figures and graduations marked off by tenths of pounds. By the use of the patented adjustable hand, it is easy to obtain the exact net weight of contents of pail; first get the exact weight of the empty pail, then loosen the screw of the hands and turn the hand back to zero. The result then obtained is the exact weight of the contents of the pail.

Very attractive and durable and of the latest type. Made to comply with the Department of Weights and Measures. Two sizes—40 and 60 pounds, by tenths. Guaranteed accurate.

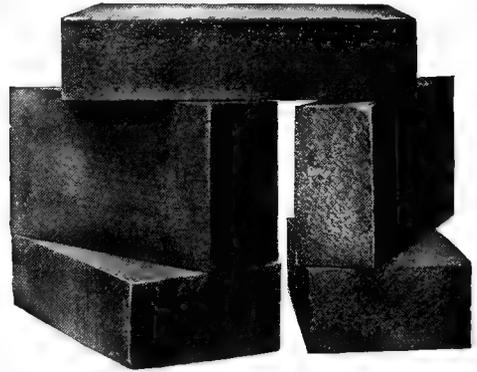

Cork Brick Flooring

A good floor for cow stalls, calf and bull pens, horse stalls, sheep pens, and piggeries is something that the dairymen and stock raisers of the country have been trying to find for years.

Wood planking is fairly warm and easy on the feet, but it is not sanitary. It soon gets foul and rots out.

Smooth concrete is easy to keep clean, but it certainly is injurious to animals that have to stand or lie on its cold, hard, slippery surface.

Chemically treated wood blocks are liable to get slippery, and frequently expand when exposed to moisture.

To get something that will combine the good and eliminate the bad qualities of these materials, has been in past years a problem.


Cork brick, however, have solved the stall floor problem. They were placed on the market six years ago after numerous tests in actual service had demonstrated merit. That they have satisfactorily fulfilled the claims made for them, is proved by the fact that there are now over 7,000,000 brick installed in approximately 5,000 dairy barns in all parts of the country.

The cork brick make a floor that is thoroughly sanitary, warm to the touch, easy under foot, non-slippery—wet or dry, durable in service, easy to install, and moderate in cost.


Cork brick consist of finely granulated cork and refined asphalt, heated and thoroughly mixed, then moulded under pressure into brick form.


The brick measure 9 x 4 x 2 inches for cow stalls, and 9 x 4 x 1 $\frac{3}{4}$ inches for horse stalls. They are laid flat, and four will cover exactly one square foot of surface.

Cork brick meet every requirement for an ideal stall floor; if you are interested, drop us a postal card asking for 32-page booklet, "Better Stall Floors."

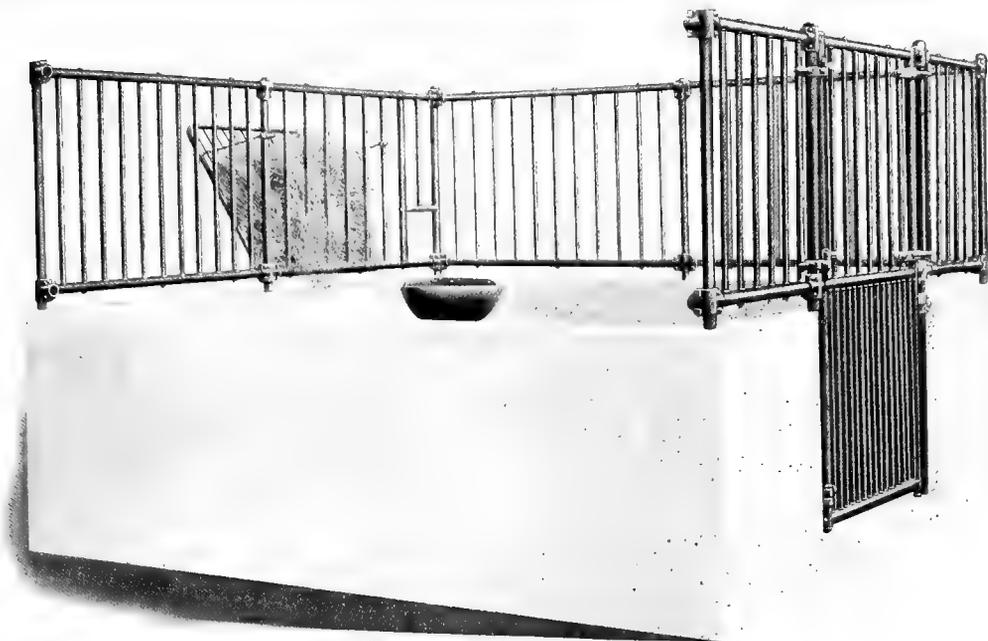

James Horse Box Stalls

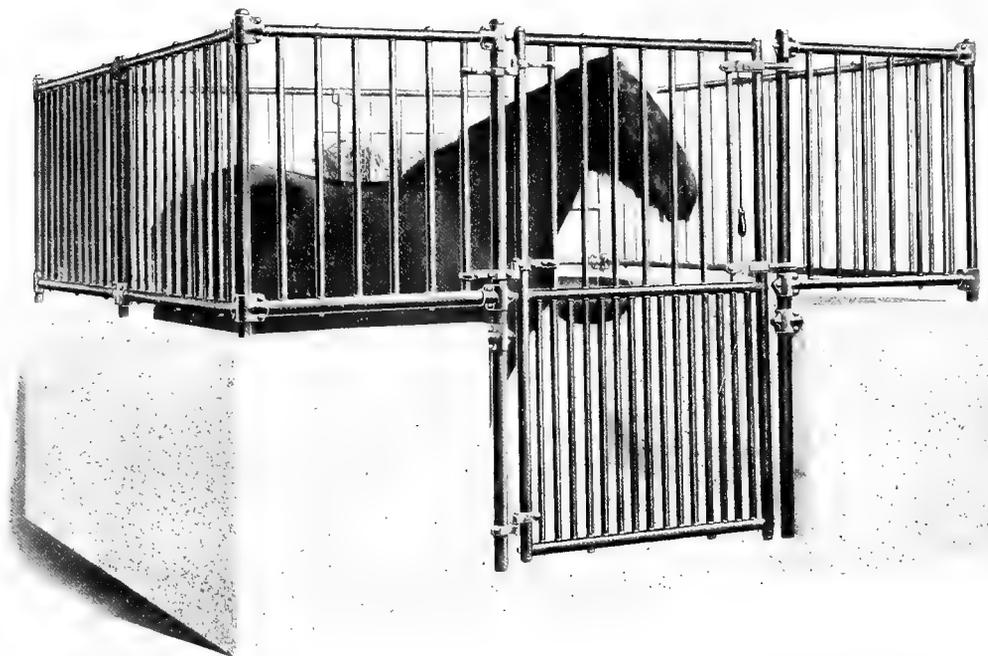

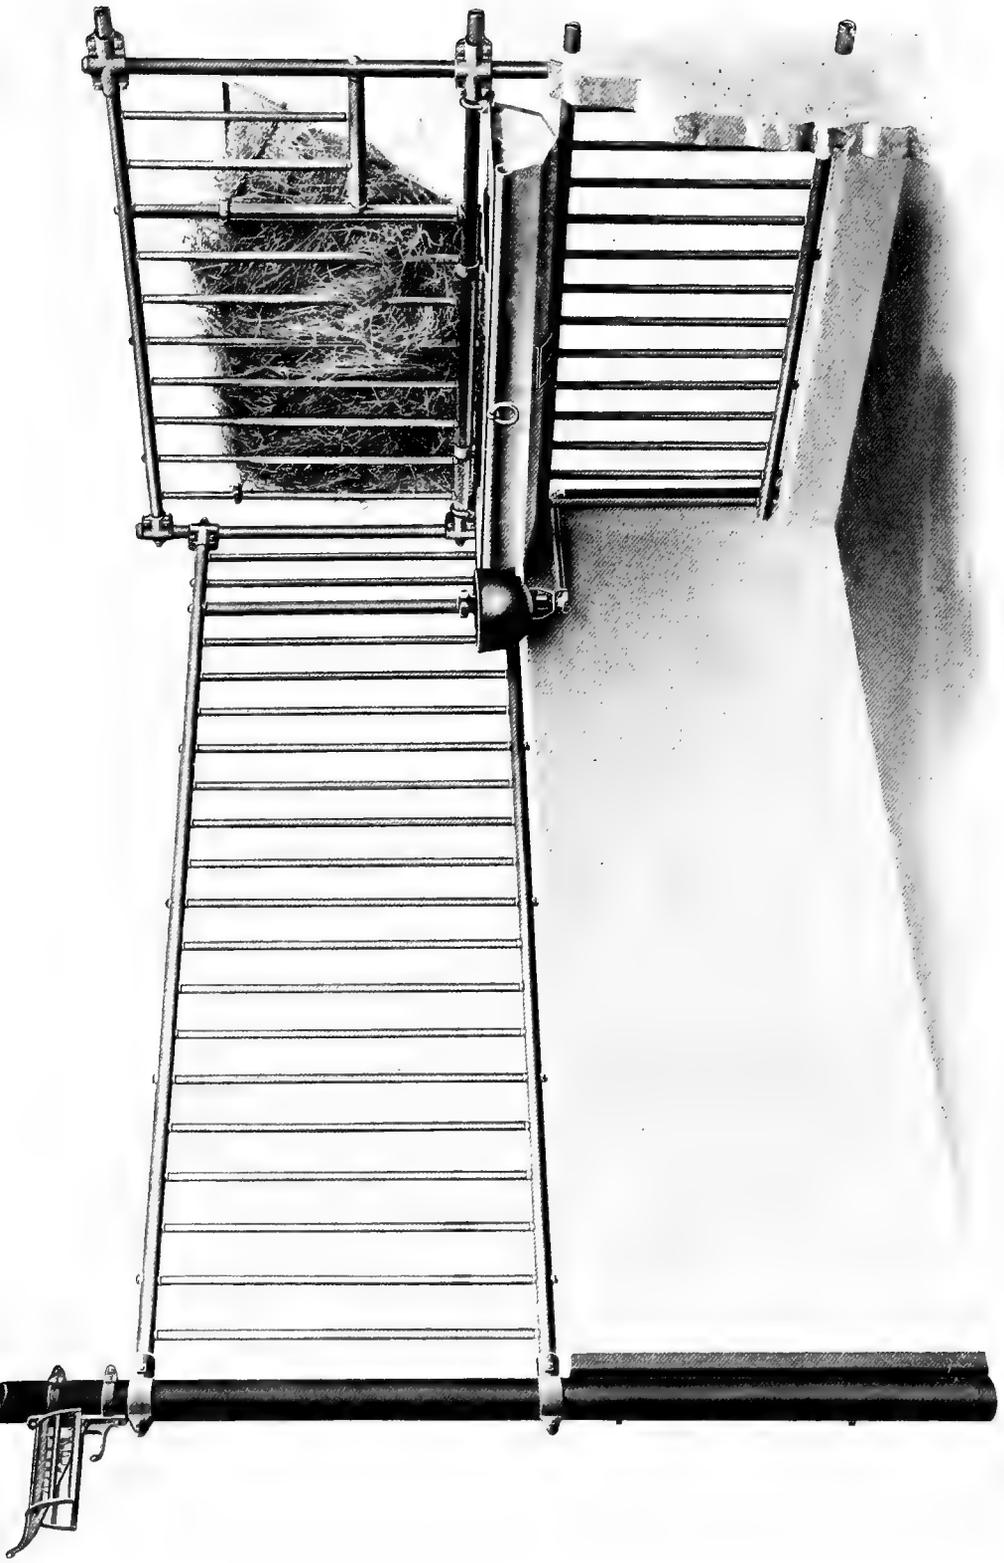

James Horse Stall

James Horse Stable Equipment

If a cow is not properly taken care of, the loss to the owner is quickly shown by the decrease in milk yield.

The importance of providing cleanliness, comfort, pure air and light for the horse is not always realized.

A horse is out in all kinds of weather from early morning until late at night, kept at all kinds of work, in the paved street or in the field. To maintain its strength and vitality and render the greatest service to its owner, the horse should have a comfortable stall in which to sleep; a stall that is reached by the sunlight during the day, that it may be properly disinfected; a stall that permits pure, fresh air to reach the animal; and feeding racks and mangers that may be easily and regularly cleaned.

The United States Department of Agriculture estimates that between fifteen and twenty dollars per year per horse is wasted in feed, which might be prevented by the use of modern and convenient methods and up-to-date equipment in the stables. If it were possible to save but \$10 to \$15 per animal, this would be enough to practically pay for complete sanitary equipment.

It is estimated that 25 per cent of the annual colt crop is lost, most of which might be prevented by intelligent treatment of the mare and the new-born colt. To give this proper attention, a box stall is an absolute necessity on every farm where colts are raised.

Proper care and treatment of the horses will quickly repay the owner through their greater capacity for work, and the added years of service.

Panel for Stall Fronts

Horizontals and supporting uprights of $1\frac{5}{8}$ -in. O. D. pipe. Panel spindle of $1\frac{1}{16}$ -in. O. D. pipe. All fittings of best malleable. Can be furnished for wood horse stall also. (See page 293.)

Swinging Panel Front

SPECIFICATIONS

Horizontals and vertical frame of $1\frac{5}{8}$ -in. O. D. pipe. Spindles of $\frac{1}{2}$ -in. round steel rod. Fittings for clamping frame of best annealed malleable. Panel pivoted at the top and furnished with swinging mechanism and stop. (See page 293.)

James Rod Back Hay Rack


SPECIFICATIONS

Rods are $\frac{5}{16}$ -in. round steel extending through a 1-in. x 1-in. angle cross bar, fitted in a $1\frac{1}{16}$ -in. O. D. pipe on top and securely riveted below on to $1\frac{1}{4}$ -in. x $\frac{1}{2}$ -in. channel. Size 36 inches x 36 inches and furnished in a baked enamel finish to match pens.

James Rod Front Hay Rack

SPECIFICATIONS

Rods are $\frac{1}{2}$ -in. round steel spaced about 5 inches on centers fitted in a $1\frac{1}{16}$ -in. O. D. pipe on top and riveted through a $1\frac{1}{4}$ -in. x $\frac{1}{2}$ -in. channel below. Size 36 inches x 36 inches. Finished in grey enamel.

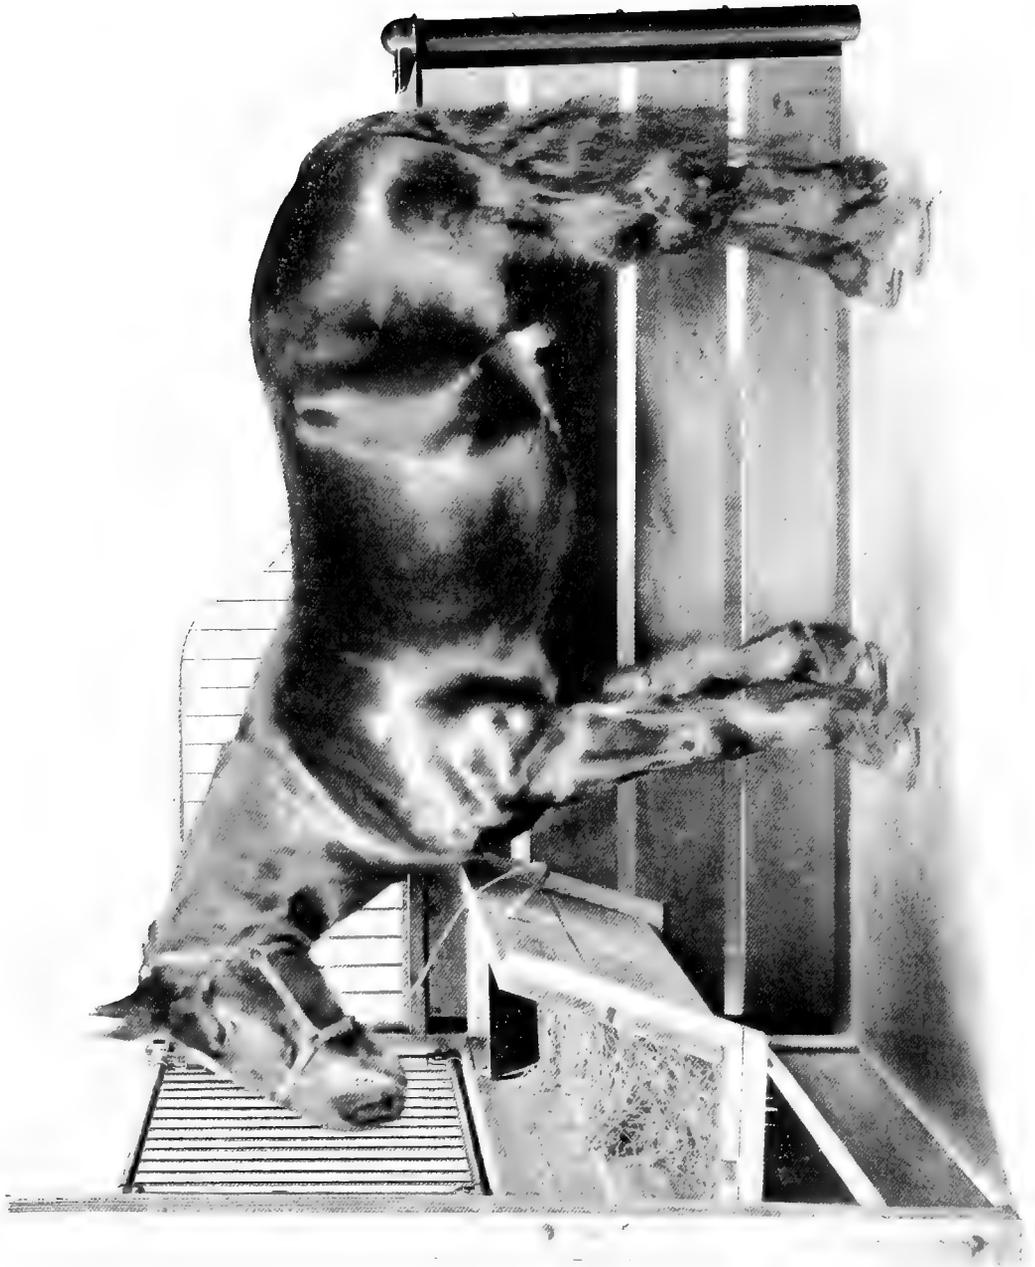

James Sanitary Horse Box Stall

SPECIFICATIONS.

CORNER AND INTERMEDIATE POSTS: 1 $\frac{5}{8}$ -in. O. D. pipe extending into floor.

GATE POSTS: 1 $\frac{7}{8}$ -in. O. D. double strength pipe reinforced at the top of partition wall by a 1 $\frac{5}{8}$ -in. O. D. pipe embedded in cement.

PANEL HORIZONTALS: 1 $\frac{5}{8}$ -in. O. D. pipe. Top and bottom horizontals bolted together with $\frac{7}{16}$ -in. cut thread bolts, spaced not more than 4 spindles between bolts.

PANEL UPRIGHTS: 1 $\frac{1}{16}$ -in. O. D. pipe spaced approximately 5 $\frac{1}{4}$ inches on centers.

FITTINGS: Best annealed malleable $\frac{7}{16}$ -in. cut thread bolts used with fittings.

ORNAMENTS: Best malleable; dust-proof type.

GATE: Frame and center horizontals of 1 $\frac{5}{8}$ -in. O. D. pipe with 1 $\frac{1}{16}$ -in. O. D. pipe upright spaced approximately 2 $\frac{1}{2}$ inches on lower half of gate. All fittings of best malleable. Equipped with safety lock and supported by 3 offset hinges of the best malleable.

GATE LOCK: Double latch, connected by $\frac{3}{8}$ -in. square steel rod. Gate locks when slammed shut, can be opened only by hand, it being necessary to raise the lever and turn.

FINISH: The steel is first mechanically cleaned, removing scale, grease and foreign matter, then followed with chemical bath, thoroughly preparing the material for painting; it is then finished with the best grey protective enamel, baked for two hours at a high temperature. (See page 125.)

HEIGHT: With 6-in. curb under gate stall is 6 feet 5 inches from the floor.
Shipped assembled in panels.

Complete Panel Fronts and Guards for Horse Stall

SPECIFICATIONS

POSTS: 1 $\frac{5}{8}$ -in. O. D. pipe extending below floor line.

PANEL HORIZONTALS: 1 $\frac{5}{8}$ -in. O. D. pipe. Top and bottom horizontals of both upper and lower panels are bolted together separately with $\frac{7}{16}$ -in. cut thread bolts.

PANEL UPRIGHTS: 1 $\frac{1}{16}$ -in. O. D. pipe spaced approximately 5 inches on centers.


FITTINGS: Best malleable $\frac{7}{16}$ -in. cut thread bolts used with fittings for attaching panels to posts.

FINISH: The steel is first mechanically cleaned removing scale, grease and foreign matter, then followed with a chemical bath, thoroughly preparing the material for painting; it is then finished with the best grey protective enamel, baked for two hours at a high temperature.

HEIGHT: 6 feet 9 inches from the floor.
Shipped assembled in panels.

Feed Manger



Manger is of 18-gauge galvanized sheet steel; ends are locked seamed with reinforcing plates on corners. Furnished with an iron clean-out and tie ring.

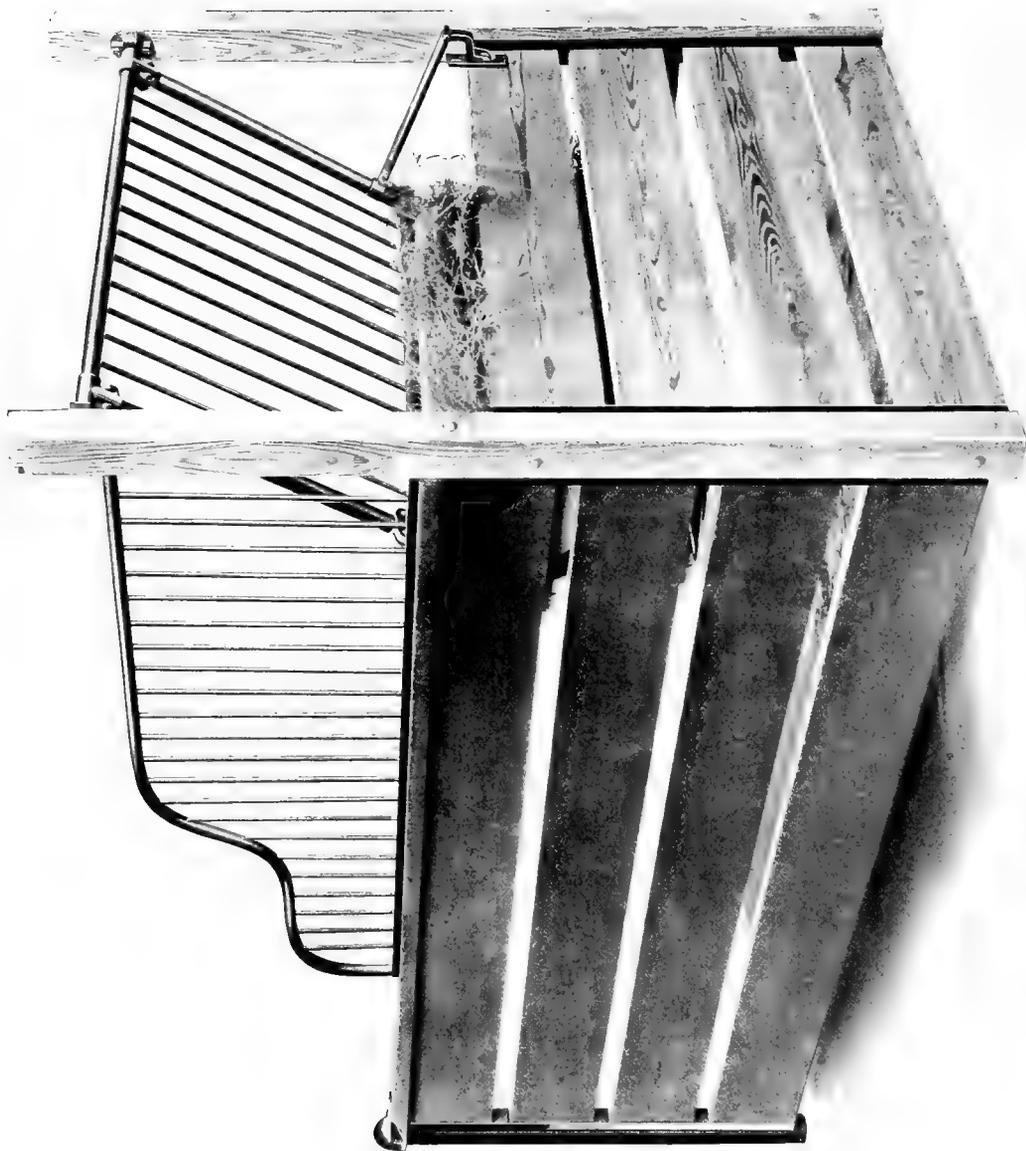

Channel Steel

For protecting the rear edges of a concrete partition we furnish channel steel 4 in. x $1\frac{3}{4}$ in. x $\frac{3}{16}$ in., 5 $\frac{1}{4}$ lbs. per foot. Supplied with anchors.

We can also supply James supporting columns with channel steel, 2 in. x $1\frac{1}{2}$ in., number 12 gauge, attached, for use at the rear of horse stall partitions of wood; also, channels for use in front of stall partitions. The use of these channels makes it possible to easily and quickly remove the planks from the partitions, should that at any time be desirable.

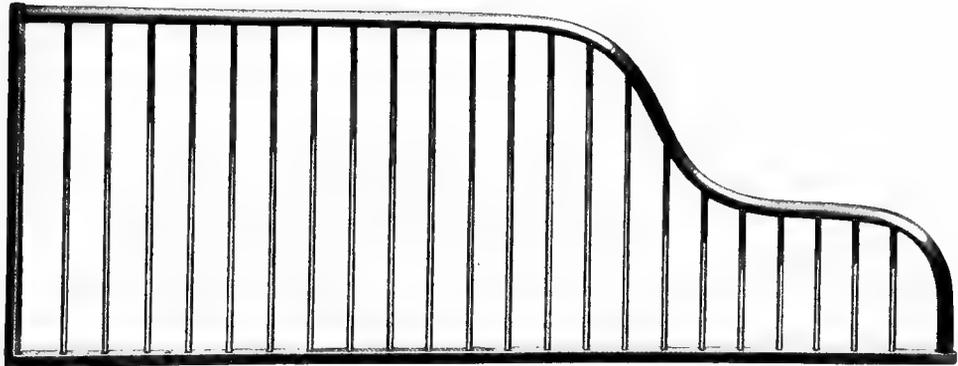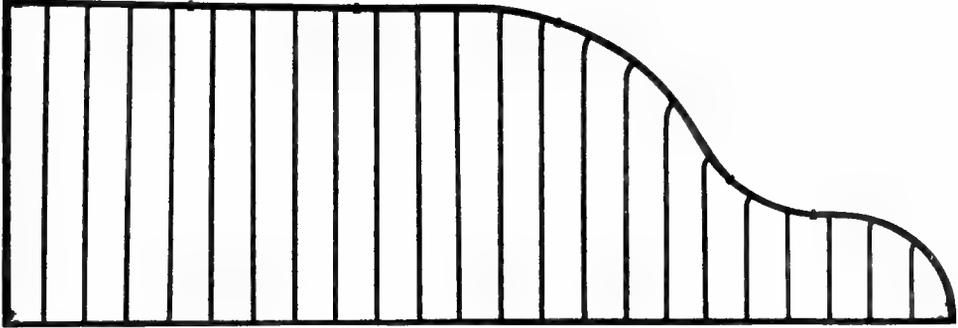

James Horse Stall Guards

Light and sanitary, allows better ventilation, lets the sunlight strike the stall and does not collect the dirt; more permanent than wood. Steel upright bars are much better than wire mesh, for the wire does not have the strength and will rust out in a short time. Harness hames will not catch in these bars and tear them out as they do with the wire stall guards.

SPECIFICATIONS

Guard No. 1

Guard made of channel iron $1\frac{1}{4}$ in. x $\frac{1}{2}$ in. with $\frac{1}{2}$ -in. round steel uprights. Furnished either square or O. G. end. Standard lengths 6 ft., but made any length special. Height of guard 28 inches.

Guard No. 2


Uprights of $\frac{1}{2}$ -in. round steel spaced 3 inches apart fitted into $1\frac{5}{16}$ -in. O. D. top horizontal and securely riveted through a $1\frac{1}{2}$ in. x $\frac{3}{4}$ in. channel below. Furnished either square or O. G. end. Standard lengths 6 feet but made any length special. Height of guard 26 inches.

Hay Rack

Made of heavy galvanized sheet steel, well riveted on a framework of 1 in. x 1-in. angle iron. Hinged at the bottom and furnished with chain to hold rack in any position.

Horse Stall Panel Guard SPECIFICATIONS

Horizontals of $1\frac{5}{8}$ -in. O. D. pipe. Panel uprights $1\frac{1}{16}$ -in. O. D. pipe, spaced approximately 5 inches and securely held in place with $\frac{7}{16}$ -in. cut-thread bolts. Fittings are best malleable. Height over top of cement partition wall 3 ft. 4 in. Finished with the best gray protective enamel, baked on.

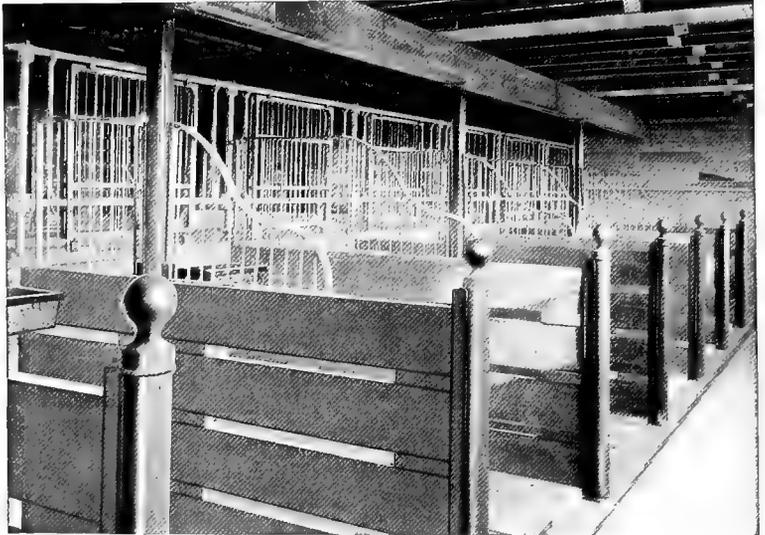


James Wood Horse Stall




James Corner Feed Box No.214

Cast iron, 9 inches deep by 17 inches by 17 inches. Flange on inside edge, to prevent waste of feed.

James
Horse
Stall
Post

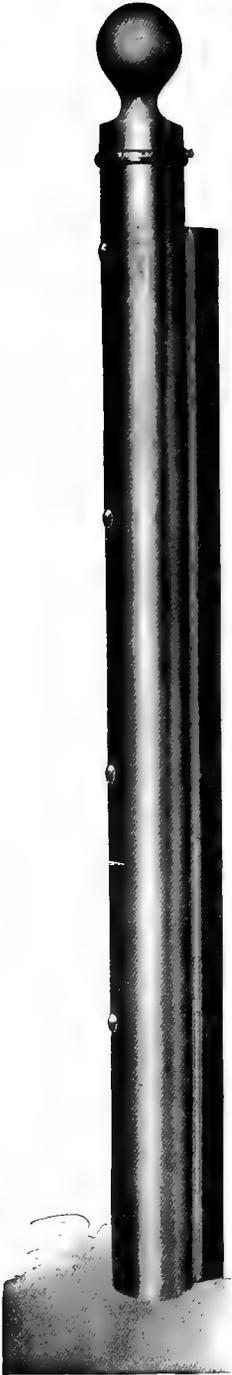

THE MEN BEHIND THE JAMES WAY

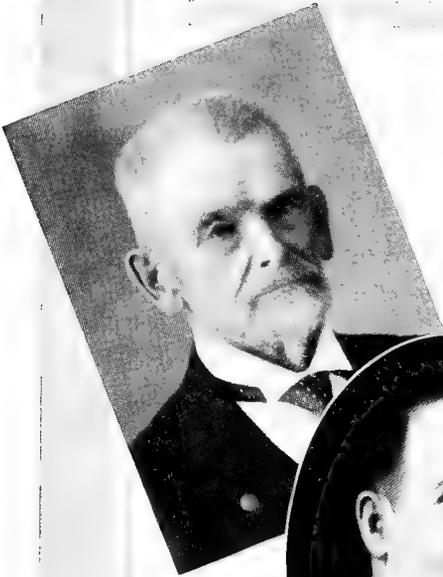

**C. P.
GOODRICH**
Pres.



**H. H.
CURTIS**
V. Pres.



W. D. JAMES
Secretary and General Manager

Our Golden Rule Guarantee

We Guarantee *not only the quality of material and workmanship, but complete satisfaction with the service of the equipment in actual use if our simple instructions are followed.*

We make this strong guarantee for mutual protection. If there should be a fault in any of our goods, causing dissatisfaction on the part of the buyer, we could not afford to have him keep the equipment.

His dissatisfaction would become our loss. We are, therefore, anxious to return the purchase price to any buyer of our goods who is not fully satisfied if we are at fault in any way.

Remember that this guarantee not only covers the quality of material and workmanship; but the demonstration in your own barn must prove our claims of superiority or we want the goods, and you get your money back if you have paid for them.

OUR TERMS: *Net Cash. No Discounts.*

This guarantee applies to every equipment, no matter whether purchased from us direct or through our representative. We make it good direct to you in either case

JAMES MANUFACTURING CO.

C. P. Goodrich
President

H. N. Curtis
Vice-President

H. D. James
Secretary & General Manager

Introducing the Men Behind the James Way



THIS catalog tells the story of the profit-making James Way of caring for dairy cattle in the barn—points out how sanitary conditions may be maintained—how feed may be saved—how losses through wasteful methods of doing the barn-work may be stopped.

Some of the statements may seem to the uninformed almost too good to be true; and that you may know something of the men who make these statements and who stand back of the James “Golden Rule” guarantee we ask you to read the brief history of these men which follows, and of the concern whose affairs they direct.

Read, too, the statements of Fort Atkinson banks, the letters from satisfied customers in various sections of the book, and glance over the partial list of well-known men who have honored us with their business.

Then study the pictures which appear on pages 6, 8 and 9 showing the remarkable growth of the business.

Having done this, you will not doubt us when we say that we are in this business with a sincere desire to aid in the upbuilding of the dairy industry of the country and to help the average dairy farmer improve conditions in his barn and secure greater money rewards for his labor.

The Men

The President of the company is Charles Perry Goodrich, well known to dairymen throughout the United States as having devoted a long life to the dairy business and to the improvement of dairy conditions.

His work as an instructor and lecturer in farmers' institutes in many states, and as a writer on dairy subjects, has made his name familiar to those interested in dairying. He is one of the few men in America who has received a testimonial from the University of Wisconsin on account of “Services rendered to agriculture and related branches.”

As indicated in the testimonial, Mr. Goodrich's services were along dairy lines; and as the president of the James Mfg. Co., he is still in the work of bettering conditions in that great industry.

Mr. Goodrich is also Vice-President of the Northwestern Mfg. Co., known everywhere for their high standing in the manufacture of superior buggies and carriages.

Mr. H. H. Curtis, our Vice-President, is engaged in large business enterprises and is also in the dairy business in a practical way, operating a dairy farm near Ft. Atkinson and dealing in registered and graded dairy cattle.

CITIZENS STATE BANK

C. J. WARD, PRESIDENT
G. W. KINDLIN, VICE-PRESIDENT

D. W. DONKLE, CASHIER
G. E. WARD, ASSISTANT CASHIER

FORT ATKINSON SAVINGS BANK CAPITAL \$40,000.00 FORT ATKINSON, WIS.

March 1st, 1914.

To the Public:-

The James Manufacturing Company is one of the most enterprising concerns in our city, and we understand is the largest exclusive barn equipment manufacturer in the world. It was organized a little over seven years ago.

This Company has had a very remarkable growth, a considerable addition to its plant having been required almost every year. It is now doing business throughout the United States and in many foreign countries, and from all sources we hear only words of commendation for the Company, and its methods of business.

The management is well and favorably regarded in our city, and is composed of men of sterling worth, honor and integrity.

Respectfully,

Fort Atkinson Savings Bank.



Cashier.

This bank has fifty farmers as part owners.

He is well known at home and abroad as a successful business man in the best sense of the term.

Mr. W. D. James, our Secretary and General Manager, scarcely needs an introduction to any dairyman who is at all familiar with current improvements in dairy barn building and equipment.

His name is associated inseparably with progress in dairy barn architecture and in methods of handling dairy barn work. He is regarded by leading dairymen throughout the country as an authority on dairy barn construction.

The barn adopted some years ago by the Wisconsin State Board of Agriculture as the model dairy barn at the Wisconsin State Fair Grounds, is familiar to all who have attended that fair and to many others who are readers of the dairy and agricultural press.

Mr. James' plans were chosen as the best from those submitted in open competition by architects and other experts.

In the years that have passed since this first public recognition of the worth of his idea in barn designing, Mr. James has designed hundreds of the largest and most practical dairy barns of the country; thousands of other barns, both large and small, have been built from plans drawn under his direction; and other thousands of barns have been remodeled in accordance with his suggestions and plans.

Prominent dairymen from coast to coast seek his services. It is the good fortune of the patrons of this concern that Mr. James is associated with us, for every buyer of our barn equipment is given the benefit of his special knowledge and long experience in barn designing.

Mr. James was born and raised on a dairy farm; and as a boy and man became thoroughly familiar with the business of dairying. His genius as an inventor has solved and is solving many of the problems and difficulties of the business, making the life of the average dairyman easier and dairy profits bigger.

The Company

Although the company is comparatively young, having been organized under the laws of Wisconsin in 1906, its growth has been very rapid, until now it has an authorized capital stock of \$500,000.00.

The real beginning, however, was back on the James farm near Wales, Wis., where the first James stalls were made in the old blacksmith shop on the farm. Later, more stalls were made in the village near by.

One day it happened that Mr. C. P. Goodrich saw the "new-fangled" stall in use on a farm where he was visiting, and so impressed was he with its sanitary features and labor saving devices that he drove over to see the inventor.

As a result of the acquaintance thus begun, a company was organized to handle the proposition on a large scale and the business moved to Ft. Atkinson.

CAPITAL \$75 000

SURPLUS \$15 000

THE FIRST NATIONAL BANK

No. 157

ORGANIZED 1863

J. B. CROWELL, PRESIDENT
A. B. CASSELL, JR., CASHIER
J. F. SCHREINER, ASSISTANT CASHIER

FORT ATKINSON, WIS.

March 1st, 1914.

To Whom It May Concern:-

We take pleasure in saying that the James Manufacturing Company is and has been a valued customer of ours since its organization seven years ago.

We are personally acquainted with the directors of the Company, as well as the gentleman in charge of the active management of the business, and we know them to be men who take pride in carrying out their promises and agreements to the letter.

The Secretary and General Manager, Mr. W. D. James, was born and brought up on a dairy farm and has throughout his life been engaged in the dairy business or in business closely related to dairy farming.

The men managing the business seem to have an unusual understanding of the essentials in the care of dairy cattle; and have a wide reputation as experts in designing sanitary dairy barns.

It is a recognized fact by those who are in position to know that the James Manufacturing Company has done a great work towards bettering the conditions of dairying in general throughout the United States.

We very gladly recommend this Company as reliable and worthy of confidence in every way.

Respectfully yours,

First National Bank of Fort Atkinson.



Cashier.

At this stage of the history of the business, one man constituted the entire factory force, one girl handled the office work, and the manager, Mr. James, worked part time in the shop, part time in the office and part time out on the road selling the product of the little factory.

Progressive dairymen quickly realized the value of equipment that would help keep their barns clean and that would lessen barnwork; and within a couple of years a very satisfactory little business was established.

From that time on, however, the business grew so fast that it was difficult to keep pace with it in shop and office. Scarcely a year has gone by that additions to the factory building have not been made to take care of the increased output.

From year to year, huge machines were added to the plant to take the place of hand work, to make more perfect the workmanship and to lessen the floor space needed; nevertheless each year more men and a bigger factory were required.

From the very first "Service" has been the keynote of the business.

Not only has Mr. James given much time and thought to working out new inventions that would lessen labor and improve sanitary conditions in dairy barns; but under his direction, other men with inventive genius and experience in the dairy business, have been developing and testing out ideas that promise a betterment in barn methods.

In connection with this work, an experimental department was established some years ago. Before new equipment is offered to the public, it is put through many tests to determine its practical worth and strength; the final test being actual use in severe service in the James Experimental Barn, a picture of which appears on pages 264 and 265.

When any James equipment or device is offered, you may be sure that it has been proven satisfactory in actual use and that it will fulfill perfectly all requirements. James Equipment is not built on theory.

A Barn Planning Department was early established for the benefit of customers and prospective buyers of James Equipment, with a staff of competent architects and draftsmen. This makes it possible for us to give everyone the benefit of Mr. James' experience and special knowledge of what is best and most practical in barn building.

If you intend to build a barn, or remodel one, you are cordially invited to come to Fort Atkinson, visit the Experimental Barn and other barns in this vicinity then talk over your plans with our Barn Planning staff. Perhaps they can help you just as they have helped thousands of other dairymen. In any event, you will be under no obligation to buy of us—we shall be glad to give you the benefit of our advice and counsel on barn planning whether you buy James Equipment or not.

Partial List of Users of James Equipment

ALABAMA—

Birmingham Robt. Jemison, Jr.
 Mobile Clove Creamery
 Mobile Episcopal Church Home
 Mobile Wm. P. Tunstall
 Scale C. R. Dudley
 Summerdale B. J. Sullivan
 Tuscaloosa Alabama Insane Hospital

ARKANSAS—

Brinkley H. L. D. Whitson
 Elkins D. T. Boone
 Fayetteville H. C. Porter & Sons
 Scott T. W. Steele
 Stuttgart Young's Poultry and Dairy
 Farms, O. M. Young, Prop.

CALIFORNIA—

Escalon A. B. Humphrey
 Glen Ellen Jack London
 Hopland A. W. Foster
 Napa California State Hospital
 Sacramento A. Meister
 Santee Edgemoor Farm
 Santa Anita Anita Baldwin
 San Francisco James Rolph, Jr., Mayor of
 San Francisco
 Stockton California State Hospital

CONNECTICUT—

Bloomfield T. C. Perkins, Broker
 Cheshire Cheshire Reformatory
 Danbury Philip Seelig
 East Haven John Howe
 Groton Branford Farms, Morton F.
 Plant
 Hartford F. E. Duffy
 Hartford Watkinson Farm School
 Litchfield Echo Farm
 Long Hill J. Arthur Sherwood
 Meriden J. Hobart Yale
 Middletown Daniels Brothers
 New Haven Ex-Gov. R. S. Woodruff
 New London H. R. Douglas, Contractor
 New Milford A. G. Barnes
 Storrs Connecticut Agricultural Col-
 lege
 Windsor Loomis Institute

DELAWARE—

Georgetown Andrew Marvel
 Wilmington Coleman DuPont

FLORIDA—

Lake City North Florida Dairy Co.
 Lemon City Dr. J. G. Du Puis
 Muscogee Oscar Williams

GEORGIA—

Columbus E. P. Owsley
 Savannah Georgia State Industrial Col-
 lege

ILLINOIS—

Algonquin R. E. Haeger. Holsteins
 Bartlett S. P. Stevens. Reid, Murdock
 & Co.

ILLINOIS—Continued

Champaign Capt. J. R. Trevett
 Chester State Hospital
 Chicago Union Stockyards & Transfer
 Co.
 Chicago H. W. Gossard. Gossard
 Corsets
 Chicago Ralph Wilder, Cartoonist
 Davis Wesley M. Sarver
 Des Plaines St. Mary's North Farm
 Dolton Dr. C. H. Thompson
 Elgin Smith Youngs. Holsteins
 Elgin A. H. McCormick
 Elgin C. E. Chaxpell
 Elgin Preston Bellows
 Hampshire T. E. Getzelman. Holsteins
 Hinsdale C. A. Tousey
 Jacksonville Deaf and Dumb School
 Lake Forest Mrs. Scott Durand
 Lake Villa O. W. Lehmann
 Lisle Joy Morton
 Oregon Col. F. O. Lowden. Sinnis-
 sippi Farm
 Peoria State Hospital
 Streator Sass Bros.
 Techny Society of the Divine Word

INDIANA—

Auburn Geo. W. Rakestraw
 Auburn J. W. Sheffer
 Brooklyn Black & Adams. Jerseys
 Brookville Morris M. Thompson
 Crown Point C. E. Benjamin
 Crown Point Lake County Poor Farm
 Crown Point August Neuenfeldt
 Elkhart John Houseworth
 Evansville Southern Hospital
 Fort Wayne Indiana Home and Training
 School for Feeble Minded
 Youth
 Goshen W. Showalter
 Indianapolis Howard Johnson
 Kokomo Sylvester Bell
 Lafayette St. Anthony's Home
 Lafayette Purdue University
 La Porte W. C. Weir
 La Porte Alden H. Herrold
 Logansport Northern Hospital for Insane
 Logansport W. W. Moss & Son
 Madison Southeastern Hospital
 Marion W. G. Bradford
 Martinsville Van Camp Packing Co.
 Michigan City Walter J. Bull
 Mishawaka John H. Fulmer
 Mishawaka Clarence Fulmer
 Mishawaka Clem Fulmer
 New Carlisle E. H. Studebaker
 No. Manchester D. C. Harter
 Petersburg W. E. Lamb. Guernseys
 Rockville Indiana Tuberculosis Hospital
 South Bend Notre Dame University

PARTIAL LIST OF USERS—Continued

INDIANA—Continued

South Bend St. Mary's Academy
 South Bend E. L. Kelsey
 South Bend E. H. Studebaker
 Terre Haute The Rose Orphans Home
 Terre Haute Chas. Whitcomb, "Sleepy
 Hollow Farm"
 Warren Methodist Memorial Home

IOWA—

Albion Geo. F. Reidel
 Algona Bert McCorkle
 W. K. Ferguson
 Anamosa State Reformatory
 Arlington Harrie W. Gleim
 Erritt John Hammill
 Charles City M. F. Schlick
 Cedar Rapids Wm. Ford
 Cedar Rapids Wm. T. S. Bear
 Cedar Falls Dr. Thos. Y. Kane
 Clyde Bechtelheimer
 J. O. Scheff
 Commanche C. Schuler
 Davenport J. R. Lane. Iowana Farms
 Old People's Home
 Decorah Mountain Bros.
 Des Moines St. Mary's Orphans' Home
 Dubuque Gus. Hesselman
 Dyersville C. A. Lundy. Lawyer
 Eldora State Industrial School
 Fayette Fayette County Home
 Fenton A. A. Dreyer
 Fredericksburg L. E. Fay
 Ft. Dodge L. E. Armstrong
 Senator Fred Larabee
 Fillmore S. S. Budlong
 Glenwood State Hospital
 Granger Dale Meek
 Hampton Roemer-Gibson Farm
 Hawkeye A. L. Eitel
 Inwood Henry Sterkens
 Mason City Heeler Bros.
 Mitchellville W. P. McDonald
 McGregor F. Kadlec
 Orange City Otto Van Roekel
 Osage W. D. Runge & Sons
 Preston John Grant
 Pomeroy John Featherstone
 Rolfe Louis Nemecek. Dairyman
 Sioux City J. W. Kennedy
 Staceyville Nick Theobald
 Storm Lake Sac City Canning Co.
 Sumner Walter Thompson
 Cass Farm Co.
 Sutherland Mrs. R. C. Jordan
 Waukon County Poor Farm
 Waterloo Galloway-Messer Farms
 Winterset Flora E. Harris

KANSAS—

Denison David Coleman
 Ossawatimie State Hospital
 St. Mary's St. Mary's Academy

KANSAS—Continued

Topeka State Hospital
 Topeka Industrial Educational Insti-
 tute
 Topeka J. W. Bigger
 Topeka O. E. Walker

KENTUCKY—

Berea Berea College
 Berea Lincoln Institute
 Frankfort Kentucky Institute of Feeble
 Minded Children
 Jenkins J. W. Ellis. Elkhorn Dairy
 Louisville A. E. Norman
 Nicholasville Everett B. Hoover
 Versailles J. N. Camden

LOUISIANA—

Alexandria W. E. McFarland
 Alexandria Jos. Sterx
 Homer Dr. L. E. Morgan
 Marksville C. C. Gaspard
 Opelousa State Normal School
 Reserve Godchaux Belle Pointe Dairy
 Raceland Clotilda Plantation
 Slidell G. O. Journey

MARYLAND—

Augusta State Hospital
 Augusta School for Feeble Minded
 Baltimore City of Baltimore
 Baltimore C. H. Bassshore
 Baltimore Eudowood Sanitarium
 Baltimore Dr. J. I. France
 Beltsville U. S. Experimental Farm
 Hagerstown M. P. Moeller. Organ Mfrg.
 Sudlersville R. Bruce Massey
 Warton J. E. Morris

MASSACHUSETTS—

Boston George Ellis
 Boston Maxwell Norman
 Boston C. H. Jones. Pres. Common-
 wealth Shoe Co.
 Framingham N. I. Bowditch
 Holyoke W. F. Whiting. Paper Mfrg.
 Ipswich R. T. Crane
 Lancaster Industrial School for Girls
 Oldtown C. A. Gray. Oldtown Canoe Co.
 Palmer Monson State Hospital
 Shirley Industrial School for Boys
 Wellesley Hills Academy of the Assumption
 Westfield State Hospital
 Whitinsville Arthur F. Whitin. Whitin
 Mfg. Co.
 Worcester A. S. and M. W. Clements
 Worcester W. J. Woods

MICHIGAN—

Allegan Allegan County Infirmary
 Aloha Geo. H. Jewett
 Battle Creek Dr. J. B. Patterson
 W. M. Wentworth
 Geo. B. Willard

PARTIAL LIST OF USERS—Continued

MICHIGAN—Continued

Belleville Quirk Farms
 Big Rapids Harry Widdicomb, Jr.
 Birch Run Chas. Wolohan
 Cadillac Dr. G. D. Miller
 Charlotte H. W. Hancock
 Clark's Lake C. F. York
 Coldwater Campbell & Angevine
 Detroit Carl E. Schmidt
 W. E. Flanders.
 W. E. Scripps
 Dr. R. J. Palmer
 G. L. Spillane & Son
 Dr. Ernest Schemer
 St. Clair Co. Infirmary
 Grand Rapids Irving J. Bissell
 Grand Rapids A. A. Carroll
 Hart Charles R. Horrie
 Hastings P. T. Colgrove
 Howell State Tuberculosis Sanitarium
 Houghton Houghton County Infirmary
 Imlay City G. W. Cardwell & Son
 Iron Mountain Dickinson County Hospital
 Jackson Allen Bros.
 Jackson Jackson State Prison
 Jenison Benj. Hanchett
 Lansing H. W. Wigman. Guernseys
 Lapeer Home and Training School
 Leslie L. S. Marshall
 Marquette Emblagaard Dairy
 Marshall Dr. J. W. Houston
 Stewart Acre Farms
 Geo. Gillespie. Holsteins
 Newberry Newberry State Hospital
 Niles Ballard Bros.
 Ontonagon Ontonagon County Hospital
 Petersburg Zweigertdale Farms
 Port Huron M. D. Baldwin Estate
 Portland J. M. Maynard
 Saginaw Frank Plum. Guernseys
 Dr. A. S. Rogers
 G. W. Padbury
 M. G. McGowan
 Traverse City Traverse City State Hospital
 Ypsilanti J. E. Warner

MINNESOTA—

Albert Lea Will Jenson
 Albertville Herman Berning
 Amboy Adolph Herlick
 Anoka A. D. W. Johnson
 Austin Mrs. A. V. Ellis
 Belview E. G. Enestvedt
 Bemidji D. R. Gilmore
 Blue Earth Fox Brothers
 Buffalo Lake Roy Verhoffer
 Caledonia Wheaton Brothers
 Courtland Otto Berbrich
 Cottonwood C. J. Reimstad
 Martin Halstad
 D. D. Tenny
 Edw. Osmundson

MINNESOTA—Continued

Delhi Neil McKay
 Echo S. O. Sheggeby
 Fairmont Wilbur Brown (State Demonstration Farm)
 Martin County Poor Farm
 J. R. Thompson
 James O'Conner
 C. O. Gilfillan
 Cnas. Lundgren
 Chamberlain Brothers
 Otto Siercks
 B. H. Jacobson
 L. K. Rowberg
 Nelson Brothers
 C. J. victor
 Emil Thompson
 J. N. Jacobson
 A. Bruins
 Ben H. Ashley
 John Leibhard
 T. C. Norman
 J. C. Johnson
 Frank Schuldt
 Charles Neary
 Hans P. Christiansen
 Albert Teigiem
 Charles Gold
 G. H. Rogers
 A. S. Josephson
 Eugene Truax
 Louis Erunz
 N. W. Freeze
 White Bros.
 Dr. W. A. Beach
 J. W. Schmitt
 Lewis Springer
 A. J. Ringeisen
 Crone Bros.
 Louis Compart
 R. F. Compart
 Jacob Teigen
 P. C. Falkum
 Leach & Leach
 Geo. Ruel
 Rob. Crickmore
 W. C. Pagenkopf
 Pipestone Indian School
 E. H. Langhams
 G. H. Johnson
 Dr. Mayo
 State Hospital
 Andrew Stewart
 Mrs. R. E. Fuller
 Joseph J. Fisher
 Geo. B. Tetrick
 Robt. Stewart
 Dr. Thos. Flinn
 John Brandt
 Henry Ott
 Berkner Bros.
 Geo. Moll

Good Thunder
 Granite Falls
 Gilfillan
 Gibbon
 Hastings
 Hammond
 Hadley
 Hanley Falls
 Hector
 Hendricks
 Hills
 Holland
 Jackson
 Jordon
 Lake Crystal
 Lambertson
 Lakefield
 Lakeville
 Lake Benton
 Madelia
 Minneapolis
 Minneota
 Milroy
 Mapleton
 Marshall
 Mankato
 Millville
 Montrey
 New Ulm
 Nicollet
 Ormsby
 Ostrander
 Owatonna
 Pemberton
 Pipestone
 Red Wing
 Robbinsdale
 Rochester
 Redwood Falls
 Redwood Falls
 Sanborn
 Sherburne
 Sleepy Eye

PARTIAL LIST OF USERS—Continued

MINNESOTA—Continued

Spring Grove O. J. Anderson
 Springfield Michael Skow
 F. J. Isaksey
 E. J. Brosius
 Stillwater Thomas Frisby
 St. Charles Walter Hill. Farm at White
 St. Paul Bear Minn.
 George Slade, Vice-pres.,
 N. P. R. R.
 J. W. Bonngard
 W. W. Dunn, Jr.
 Knut Knatterstad
 Storden S. P. Hicks
 Tracy E. B. Gillis
 Tyler Jacob Jacobson
 H. M. Peterson
 Virginia Cusson & Rogers
 Wabasha Peter Buol
 Winona Lewis Oech
 Waseca Mrs. Geo. H. Wood & Son
 Henry Lewer
 Johnie Lewer
 Walnut Grove F. L. Marriott
 Woodstock Dennis Hennessey
 Woodlake M. F. Ahrend
 C. E. House
 Wirthington O. H. Nystrom
 Windom Redding & Redding
 Zumbro Falls Ed. Lynch

MISSISSIPPI—

Goodman Holmes County Agricultural
 High School
 Lumberton A. A. Pigford
 Macon H. B. Gurler
 Purvis James Hand, Jr.

MISSOURI—

Aurora T. E. McClure
 Conception Conception Abbey
 Crescent John T. Milliken
 Crescent P. P. Lewis, Pres. of Missouri
 State Board of Agriculture
 Eureka Tom Shields. Certified Milk
 Glencoe La Salle Institute
 Liberty Odd Fellow's Home
 Marionville H. L. Doggett
 Maysville S. W. Cook & Sons
 Palmyra Head & Gray
 St. Charles H. F. Finck. Dairyman
 St. Louis A. A. Bright
 St. Louis August A. Busch. Brewer
 St. Louis Wm. J. Lemp, Jr. Brewer
 St. Louis E. A. Lemp. Brewer
 St. Louis Pevely Dairy Co.

MONTANA—

Bozeman Montana School for the Blind
 Butte The Hennessey Mercantile Co.
 Helena Helena Holstein-Fresian Co.
 Hobson Thos. R. Murray
 Miles City C. H. Loud. State Industrial
 School
 Missoula Joseph M. Dixon
 Wibaux W. A. Orgain Co.

NEBRASKA—

Ingleside Nebraska State Hospital
 Lincoln H. A. Young
 State University
 State Hospital
 Norfolk L. E. Sabine
 Omaha H. C. Langan

NEW JERSEY—

Bernardsville Knollcroft Farms
 Bernardsville Wendover Farms. Walter P.
 Bliss, Owner. L. E. Ortiz,
 Supt.
 Morristown Morristown Hospital
 Norristown Livingston Whitney
 Norristown L. E. Niese, Jr.
 Plainsboro Walker Gordon Laboratories
 Saddle River Geo. M. Eckert
 Salem Isaac Bacon
 Sussex Belle Ellen Stock Farms
 Summit Norman Schultz
 Vineland Training School

NEW MEXICO—

Albuquerque Rio Grande Industrial School

NEW YORK—

Albany Edw. Van Alstyne
 Albion Joseph Harding
 Amboy Carlsruhe Farms. Holsteins
 Auburn D. M. Dunning
 Avon Markham & Puffer
 Babylon David Gardiner
 Baldwinsville Robert Melvin. Holsteins
 Batavia Walker & Priest. Real Estate
 Batavia George A. Bridge
 Batavia W. W. Hawley, Jr.
 Bedford Hills State Reformatory for Women
 Bedford Hills Henry W. Howe. Guernseys
 Binghamton Broome County Almhouse
 Binghamton Wm. Hotaling (Mgr. Hillcrest
 Farm)
 Bliss Lowe Brothers
 Brookton Dr. V. A. Moore (Veterinari-
 an Cornell University)
 Buffalo Dr. Geo. M. Jack
 Wm. A. Williamson
 Fred S. Knaisch.
 Eugene D. Hofeller
 Spencer Kellogg
 Carthage Fred Anderson. Guernseys
 Carthage S. R. Strickland. Holsteins
 Chaffee William Phillipi
 Chatham W. P. Hawley
 Cleveland Vandercamp Farm
 Clinton Francis Jones. Holsteins
 Clinton Corners Webb Farms
 Collens Gowanda State Homeopathic
 Hospital
 Cooperstown Clark Estate. Singer Sewing
 Machines
 Corning W. T. Smith
 Cortland W. H. Mace. Holsteins

PARTIAL LIST OF USERS—Continued

NEW YORK—Continued

Coxsackie Rev. Lewis Lampman
 Earlville Borden Condensed Milk Co.
 East Aurora Elbert Hubbard
 East Creek George R. Beardslee
 Edmeston Borden Condensed Milk Co.
 Essex Samuel Powers
 Fulton Elmer E. Taylor. Holsteins
 Gainesville L. S. Duggan
 Glen Cove Estate of Chas. Pratt
 Grand Gorge Chas. J. Dent
 Heuvelton Estate of E. H. Dollar.
 Hawthorne Jewish Aid and Protectory
 Hamilton A. A. Hartshorn
 Hamilton Prof. E. W. Smith
 Jamestown P. E. Barrett
 Jamestown Arthur W. Kettle
 Lacona Henry Stevens & Son
 La Grangeville L. L. Lawson
 Lancaster J. C. Weil
 Little Falls Mrs. Jacob Zollar
 Liverpool Syracuse Sale and Pavilion Co.
 Locust Valley Kaintuck Farms
 Mapleview Davis & Jones. Holsteins
 Marcellus H. M. Dunham. Holsteins
 Millbrook Crawford Farms
 Millerton F. A. Hotchkiss
 Mohawk Theo. D. Robinson
 New Woodstock J. A. Staunton & Son
 New York City Eben Richards
 New York City H. E. Tener
 New York City John D. Rockefeller
 New York City Metropolitan Life Ins. Co.
 New York City E. T. Holmes
 New York City Ralph Pulitzer
 New York City Houghton Farms
 New York City Ambrose Monnell
 New York City William H. Bonyng
 New York City Frederick A. Southworth
 New York City W. R. Wood
 New York City A. L. Page & Sons
 New York City Sheffield Farms
 North Syracuse Alfred Ferguson. Holsteins
 North Syracuse George Ferguson
 Ogdensburg Major Wm. H. Daniels
 Oxford Women's Relief Corps Home
 Philadelphia F. L. Ronas. Holsteins
 Plattsburg Judge H. T. Kellogg
 Poland W. D. Robbins. Holsteins
 Preble A. A. Knapp & Son. Holsteins
 Randolph Walker & Bull
 Red Hook Geo. C. Hubbard
 Rochester Geo. J. French
 Rochester D. M. Beach
 Rochester Wm. B. Hale
 Rochester C. L. Whitney
 Schenectady Lewis Shopmeyer
 Salamanca A. T. Fanchier
 Salamanca W. C. Hoag
 Sayville, L. I. Wm. Slayter. Holsteins
 Sennett Harrison Crocker & Son

NEW YORK—Continued

Sherman E. J. Ballinger
 Sherburne Kutchbach & Sons. Holsteins
 Skaneateles Geo. B. Hiscock
 Springfield Ctr. Frank M. Smith
 St. James, L. I. Hon. Lathrop Brown
 So. Dayton D. D. Decker
 Syracuse F. C. Soule & Sons
 Syracuse Leroy B. Williams
 Syracuse W. A. Eastabrook
 Syracuse John B. Tuttle
 Syracuse Claude E. Trindler
 Syracuse A. L. Brockway. Architect
 Syracuse Irving Dillaye Vann
 Syracuse J. H. Gallup. Warner Quinlan
 Asphalt
 Utica W. H. Udall. Cornell Univ.
 Utica J. B. Stetson. Stetson Hats
 Utica Linn Kinne
 Utica Brothertown Farms. Holsteins
 Utica Sanford F. Sherman. New
 Hartford Canning Co.
 Walkill Borden Home Farms
 White Plains Howard Willetts. Gedney
 Farms
 Watertown Thos. Burns

NORTH CAROLINA—

Asheville J. M. Horner
 Hamlet T. N. Battley
 Newton R. L. Shuford
 Rocksville Jeff Penn
 Rockingham Pauley Long

NORTH DAKOTA—

Burlington M. D. Graham
 Bismark U. S. Indian School
 Bisbee C. P. Peterson
 Buxton O. J. Sorlie
 Courtenay Clara Cooper Farms
 Devil's Lake C. E. Gray
 Ellendale Estate of Geo. Baldwin
 Fargo State College
 Fessenden T. L. Beiseker
 Grand Forks J. Dobmeier
 Hankinson John R. Jones
 Jamestown State Hospital for Insane
 Litchville Thos. Casey
 McArthur A. L. Barron
 Minot E. S. Person
 Minot Peter Ehr
 Minot Wm. Ehr
 Monango W. L. Caldwell
 Mooreton Wallace Manikowski
 New Salem Frank Gaebbe
 Philip Blank
 Valley City Dr. J. Van Houten

OHIO—

Akron Rev. S. E. Martin
 Akron F. A. Seiberling. Goodyear
 Rubber Co.
 Akron G. M. Stadelman

PARTIAL LIST OF USERS—Continued

OHIO—Continued

Alliance O. F. Transue
 Athens State Hospital
 Barberton Ohio C. Barber. Pres. Diamond Match Co.
 Bellevue Herbert Wright
 Bengs Knox Co. Infirmary
 Canal Dover F. A. Alleshouse
 Canal Dover H. W. Streb
 Canton Homer V. Briggie
 Cincinnati Scarlet Oaks Sanitarium
 Cincinnati Wm. Gerst
 Cincinnati James Duncan
 Cincinnati Harry Hartke. Acme Veener Co.
 Cincinnati Chas. Moeser. Pickering Hardware Co.
 Cleveland Telling, Belle Vernon Co.
 Cleveland S. L. Mather
 Cleveland Frank Rockefeller
 Cleveland O. P. & M. J. Van Swearingen
 Cleveland Cooley Farms. City of Cleveland
 Clyde Bird's-eye Farms, Frank Guffey, Prop.
 Dayton W. V. Finch, Jersey Farm, M. S. Snyder, Mgr.
 Dayton Moraine Farm
 Dayton Robert J. Blackburn
 Delta Sam Berkebile & Son
 Eaton Preble Co. Children's Home
 Fremont R. J. Christy Farm Dairy
 Gambier J. P. Walker, Woodbine Farm
 Lima James McKenzie
 Lima East Brothers
 Lima H. L. Solomon & Co.
 Lima Moire Bros.
 London New Prison Farm
 Lebanon French Bros. Bauer Co.
 Lebanon Arthur French, Valley View Farms
 Lebanon French Brothers Bauer Co.
 Louisville Lawrence Paumier. Holstein Breeder.
 Mansfield Ohio State Reformatory
 Newark W. C. Miller. Holstein Breeder
 New London Sam Lane. (Walnut Valley Stock Farm)
 Orangeville R. H. Morrison
 Steubenville Jefferson County Infirmary
 Wadsworth D. K. Stover
 Windsor A. W. Green

OKLAHOMA—
 Elkton D. T. Boone
 Millerton Wheelock Indian Academy
 Okmulgee W. Thornbergh

OREGON—
 Scappoose Fred Uhlman
 Gaston W. K. Newel
 Pullman J. D. Carson
 Union Joseph Farmers

PENNSYLVANIA—

Abbingtown E. A. Henkel
 Allentown Col. H. C. Trexler
 Altoona John Lloyd. Banker
 Altoona R. C. Burns
 Berwyn David Wilson
 Bristol Jos. R. Grundy
 Bryn Mawr Mrs. W. B. Saunders
 Canton L. M. Marble
 Center Valley C. A. Buck
 Chadds Ford Jct. A. P. Irwin. Real Estate
 Colmar R. H. Dutton
 Coopersburg T. S. Cooper & Son
 Cornell T. D. Adams
 Corry John Hammond
 Danville State Hospital for the Insane
 Doylestown National Farm School
 Ebensburg Webster Griffiths
 Edinboro Edinboro Lake Farms
 Edinboro E. L. Hotchkiss. Vinita Farm
 Elizabethtown S. G. Graybill. Holstein Breeder
 Elkview James Hutchinson
 Embreeville W. B. Wickersham
 Erie T. R. Palmer
 Erie A. W. Milne
 Erie E. H. Mack
 Erie C. L. Thompson
 Erie F. B. Downing
 Erie Wm. H. Forster
 Erie W. E. Porter
 Fairview J. B. Moore & Sons
 Garland Mission Home
 Girard Frank Pardee
 Hazelton Hershey Chocolate Co.
 Hershey H. W. Tomb
 Johnstown John H. Stephens. Lawyer
 Johnstown Jas. McDade
 Kane Edwin Phillips. Pres. American Road Machinery Co.
 Kennett Sq. Industrial School for Boys
 Kislyn J. S. Leed
 Lancaster Hynicka Bros.
 Lebanon Sterling & Graham. Bankers
 Masontown Henry Hauck
 McKean Crawford County Poor Farm
 Meadville Penshurst Farms
 Narberth George Greer
 New Castle Thos. G. Ashton
 Newton Sq. Miss Anne Vanclain
 Newton Sq. W. W. Splane. Oil Producer
 Oil City John Rynd. Oil Producer
 Oil City H. A. Beal, Jr.
 Parkesburg City of Philadelphia
 Philadelphia D. W. Dietrick. Flour
 Philadelphia W. A. Myler. Sec'y and Treas. Standard Sanitary Mfg. Co.
 Pittsburgh Dr. E. M. Dickinson
 Pomeroy M. T. Phillips. Physician
 Richlandtown Fred Neahmand
 Roelofs Jos. Heacock Co.

PARTIAL LIST OF USERS—Continued

PENNSYLVANIA—Continued

Royersford Mingo Stock Farm
 Saegertown Dr. F. W. Ketner
 Scranton International Correspondence School
 Scranton Geo. Stevenson. Mining Engineer
 Scranton Thos. E. Jones. International Correspondence School
 Smithport McKane County Home
 Holmes & Gilfillan
 Spartansburgh E. L. Henton
 Spring City Robert Cook
 Spring House Jesse Williamson
 Somerset H. W. Walker
 So. Montrose Percy Valentine
 Warren L. S. Clough
 Warren D. W. Beaty
 Warren John M. Siegfried. Holsteins
 Warren Horton-Crary Co.
 Warren Dr. C. J. Frantz
 Wattsburgh Will Gilmore
 West Chester M. B. Worth
 West Chester Herman Hoops
 West Chester P. M. Sharples. Sharples Separator Co.
 West Chester G. L. Jones
 West Chester Dr. J. K. Mitchell
 Westtown James McCommant
 Wilkes-Barre Walter M. Cruttenden
 Williamsport W. W. Jackson. United Farms Corporation
 Williamsport J. Roman Way
 Worcester Frank Landis
 Wynnewood Miss Mary K. Gibson
 Yardley V. J. Humbrecht
 York H. N. Forrey

RHODE ISLAND—

Warwick Nelson W. Aldrich. Lawyer,
 U. S. Senator

SOUTH CAROLINA—

Camden J. B. Zemp
 Clemson Clemson College
 Dillon Dr. J. H. David
 Dovesville J. L. McIntosh
 Gadsden Ernest H. Kanmer
 Greenville Clarence E. Smith
 Hartsville J. K. & G. Gardner
 Kinards R. G. Smith
 Orangeburg R. S. Wilkinson, State Colored College
 Ridge Springs H. D. Jordan, Asbell-Jordan Co.
 Sumter Dr. Archie China

SOUTH DAKOTA—

Beresford Henry Muelenkort
 Booge Ole G. Eitreim
 Brookings M. Mahr
 State College

SOUTH DAKOTA—Continued

Bruce Packham & Gill
 Canton Ole Rodway
 U. S. Indian Agency
 Centerville Hugh Langen
 Centerville W. R. Ellis
 Centerville W. A. Ellis
 Centerville Hugh Langen
 Crow Creek Crow Creek Indian Agency
 Flandreau Indian School
 Hudson P. H. Austin
 Hudson H. E. Groth
 Hudson P. H. Austin
 Madison George R. Farmer. Lawyer
 Sioux Falls State School for Deaf
 State Penitentiary
 Minnehaha County Farm
 State Hospital

TENNESSEE—

Columbia Patton, Whitaker & Son.
 Lytle Creek Stock Farm
 Ducktown Ducktown Copper and Iron Co.
 Nashville W. H. Williams

TEXAS—

Carlsbad Texas State Tuberculosis Sanitarium
 College Station A. & M. College
 El Paso W. L. Tooley
 El Paso S. T. Turner
 El Paso Sam B. Gillette
 Falfurrias Ed. C. Lasater
 Houston E. F. Dupree
 San Antonio St. Louis College, Bros. of Mary
 Thurber Texas & Pacific Coal Co.

UTAH—

Provo State Mental Hospital
 Salt Lake City Utah State Penitentiary

VERMONT—

Hardwick T. G. Bronson

VIRGINIA—

Lassiter State Farm
 Alexandria J. B. Chambers
 Richmond W. L. Brittle
 Pulaski Buena Vista Farms
 Spencer State Hospital

WASHINGTON—

Olympia Gen. Hazard Stevens
 Seattle Augustin & Kyer
 Seattle Carnation Stock Farms
 Seattle Pacific Coast Condensed Milk Co. (Carnation Milk)
 Sedro Woolley Northern Hospital for Insane
 Sumner Pierce County Farm

WEST VIRGINIA—

Fairmont Fairmont Farms
 Huntington Orphans Home
 Terra Alta State Tuberculosis Sanitarium

PARTIAL LIST OF USERS — Continued

WISCONSIN—

Amery Jas. Flanigan
 Arcadia John C. Gaveny
 Arnott S. Earl Carley
 Ashland Theo. Werder
 Ashland Jct. State Experimental Farm
 Alma Henry Thorbeck
 Antigo Morse & Tradewell Land Co.
 Albert Stengle
 Aug. Biersdorf
 Barron F. J. Krahenbuhl
 W. H. Sullivan
 Ferdinand Hellman
 E. S. Campbell
 Barron County Poor Farm
 Bangor Alois Fuchs
 Bayfield S. L. Boutin Fish Co.
 H. J. Wachsmuth. Lumber
 Manufacturer
 Birnamwood John Zimmerman
 Black River Falls J. N. McNab. Ayrshires
 Blanchardville Frank Darrah
 Bruce L. E. Larson
 Burlington Burlington Cond. Milk Co.
 Cameron J. N. Hickok
 Chippewa Falls State Hospital
 Corliss Saint Catherine Convent
 Cumberland Peter Olson
 Wm. Statton
 Delavan E. J. Tilden. Libby, McNeil
 & Libby
 Dresser Jct. John K. Gilbertson
 Godfrey Nelson
 Eau Claire Eau Claire County Asylum
 W. K. Coffin. Pres. Eau
 Claire National Bank
 Elkhorn John Harris
 Elm Grove Sisters of Notre Dame
 Fifield Edgar L. Remer
 Fort Atkinson W. D. Hoard. (Ex-Governor)
 Galesville A. W. Fivesone
 Gerald Arnold
 Grand Rapids D. D. Conway
 Clark & Jackson Agricultural
 School
 Halder John Maguire
 Hillsboro Landsinger Bros.
 Iola J. A. Rosholt
 Junction City Pete Hartjis
 Kenosha C. C. Allen. Black Cat
 Hosier
 Keshena Keshena Indian Agency
 La Crosse H. C. Oertel. Dairyman
 Dr. Christianson
 La Pointe J. E. Bissell
 Chas. L. Gilbert
 J. E. Bissell
 Marshfield Wood County Insane Asylum
 Herman Schroeder
 Marathon Arthur Lodholtz

WISCONSIN—Continued

Medford Albert Nelson
 Merrill C. P. Craft
 Henry Haas
 Albert Wendt
 Mendota State Hospital
 John Cramer
 Menomonee John Cramer
 Mosinee Geo. Ahls
 A. Paronto
 Milwaukee Fred Pabst. Brewer
 Gustav Pabst. Brewer
 E. L. Philipp. Gov. of Wisc.
 North Bend J. C. McDonald
 Nortin Crandon Forest County Asylum
 Oxford Henry McNutt. Breeder and
 Shipper of Holsteins
 Plover Frank Lila
 F. S. Holladay
 Frank Haas
 Park Falls G. D. Redel. Banker
 Phillips Dr. B. C. Meacher
 Portage Racine County Hospital
 Racine Horlick's Malted Milk Co.
 F. C. Lang
 Rice Lake W. A. MacLaughlin
 Rhinelander Sisters of St. Francis
 St. Francis H. F. Taylor
 St. Croix Falls A. A. Turk. Attorney
 Sarona John Archbrenner
 Stratford Hugh E. Rogers
 Stoddard Judge Luse. Attorney
 Superior Tomah Indian School
 Tomah Fred Perrault. Hotel
 Turtle Lake Dane County Hospital
 Verona Waukesha Industrial School for Boys
 Waukesha County Insane
 Asylum
 S. A. Baird & Son
 Dr. David Roberts
 Browne & McMillan
 Fruit Bros.
 J. L. Williams
 R. W. Rowlands
 R. G. Morey
 Waupun State Penitentiary
 Wauwatosa Hospital for Chronic Insane
 Milwaukee County Hospital
 Wausau Wm. Geuzmann
 Wausau Jct. Wausau Jct. Dairy.
 A. Swanson, Prop.
 West Salem La Crosse Co. Insane Asylum
 J. D. McDonald
 Wittenberg State Orphans Home
 WYOMING—
 Cheyenne State Farm
 Wheatland W. A. Baker
 Worland State Reformatory

INDEX

Abortion	133	Frame, Plank	25
Adjuster	281	Frame of Stall	109, 149
Air, Entrance for Fresh	81	Fresh Air, Entrance for	81
Alley Chains	286	Front Panel, Swinging, for Hog Pen	257
Alley Gate	286	Foundamentals	13
Alignment Device	115	Gate Lock for Bull Pen	237
Anchors, for Pen	231	Hinge	107
For Stall Partitions	113	Grand Prize	87
For Steel Stall	119	Guarantee	302
Anchor Stocks	123	Guards for Calf Pen	251
Appearance of Barn	17	Gudgeon	187
Assembled before Shipment	123	Gutter	23
Bail, Carrier	187	Hanger, Double Chain	105
Barn Plan Service	83	Hangers, for Carrier Track	197
Barn Scrapers	288	Harness Hooks	290
Barn, Ventilating the	67	Health of Cows	93
Barns, Plank Frame	25	High Lift	193
Big Boy Hoist	189	Hinge	107
Carrier Specifications	209	Hog Pen	253, 255
Big Knees	131	Farrowing Rail	257
Bigger Dairy Profits	87	Specifications	259
Bigger Milk Yields	91	Swinging Panel	257
Brake, Carrier	189	Tilting Trough	257
Building a Dairy Barn	11	Hog Trough	285
Bull Pen	233	Hoist, Carrier	189
Bull Pen Gate Lock	237	Horse Stable Equipment	295
Bull Staff	287	I-Beam Track	193
Bull Stall	149	Intakes, Ventilation	71
Calf Pens	245	James System of Ventilation	69
Calf Pen Specifications	251	Barn Plan Service	83
Manger	251	Keeper, Prevents Carrier Jumping Track	191
Stanchions	251	Lifting Chain	193
Guards	251	Lifting Springs for Manger	137
Carrier, Big Boy, Specifications	209	Light	31
Chore Boy, Specifications	223	Linings, Wood	105
Combination, Specifications	221	Lock for Bull Pen Gate	237
Feed, Specifications	211	Lock Open	101
Milk Can, Specifications	213	Manger, Complete	133, 149
Swill, Specifications	215	Construction	133
Carriers	181	Division	137, 149
Carrier Support, Outside	207	Manger Division Holder	138
Alongside Barn	207	Lifting Springs	137
Chain Guides	191	For Bull Pen	239
Chore Boy Carrier Specifications	223	For Calf Pen	251
Parts	225	For Cow Pen	243
Clutch, Carrier	189	Manger Cleaners	289
Columns, Supporting	19, 283	Material for Concrete	23
Combination Carrier	219	Milk Can Carrier Specifications	213
Specifications	221	Milk Can Truck	229
Combination Switches	199	Milk Stool	284
Complete Manger	131	Milking Machine Fittings	290
Concrete, Material for Floors	23	Mixing Concrete	23
Mixing	23	Name Plate	290
Proportions of	23	Openings to the Ventilators	81
Construction of Flues	81	Outside Support for Carrier	207
Of Manger	133	Paint	291
Cork Brick	292	Panama Pacific Exposition Grand Prize	87
Cow Pen	240	Panels and Posts, Bull Pen	233
Specifications	243	Partitions, Stall	111
Tilting Manger	243	Partitions Anchors	113
Stanchion	243	Pens	231
Crane, Swinging	203	Easy to Set Up	125-231
Divisions for Mangers	137	Tubular Anchors for	231
Double Chain Hanger	105	Water Cups for	233
Drain	281	Pen for Bull	233
Drinking Cups	161, 173, 175, 177	Gate Hinge	233
Dumps Either Way, Carrier	187	Gate Lock	237
Dust Proof Fittings	111	Manger	239
Enamel Finish	125	Panels and Posts	233
Entrance for Fresh Air	81	Specifications	239
Erection of Stalls	119	Stanchion	239
Farrowing Rail, Hog Pen	257	Pen for Calves	245
Feed Carrier, Specifications	211	Pen for Cows	240
Feed Manger, Tilting, for Cow Pen	243	Pen for Hogs	253-255
Feed Truck, Specifications	227	Plan Service	83
Finish of Equipment	125	Plank Frame Barns	25
Fittings, Sanitary	111	Posts, Supporting	283
Floors, Stable	21	Proportions of Concrete	23
Material for	23	Registers	281
Thickness of	23	Regulating Tank	175
Flue, Essentials of Ventilating	79	Removable Track Section	193
Construction of	81		
Foreword	5		

INDEX—Continued

Sanitary Fittings.....	111	Supporting Posts or Columns.....	19, 283
Saving Time and Work.....	89	Sure Stop.....	99
Scale.....	292	Swinging Crane.....	203
Scrapers.....	288	Swinging Sure Stop.....	99
Self-Cleaning Manger.....	133	Switches.....	198-199
Service, Barn Planning.....	83	Tilting Cow Pen Manger.....	241-243
Setting up Pens.....	125-231	Tilting Trough for Hog Pen.....	257
Setting up Stalls.....	123	Track for Carrier (I-Beam).....	193
Shaft.....	193	Track Hangers.....	197
Shipped Assembled.....	123	Track Section, Removable.....	193
Silos and Silage.....	31	Tracker Wheels.....	191
Site (for Barn).....	15	Trucks for Carrier.....	191
Size (of Barn).....	17	Tubs, Carrier.....	187
(of Ventilating Flues).....	77	Tubular Anchors for Pens.....	231
Space per Animal.....	79	Ventilating the Barn.....	67
Specifications.....	143	Ventilating Flues, Essentials of.....	79
Springs, Manger Lifting.....	137	Ventilation, James System of.....	69
Stall Anchors.....	119	Degree Necessary.....	75
Stall Frame.....	109, 149	Intakes.....	71
Stall Partitions.....	111	Sizes of Flues.....	76
Stall Partition Anchors.....	113	Ventilation.....	53
Stalls.....	139, 147, 149	Ventilator, Openings to the.....	81
Special Features of.....	99	Ventilators, James.....	261
Stanchions.....	139	Revolving Hood.....	269
Stanchion for Bull Pen.....	239	Size to Buy.....	277
For Calf Pen.....	251	Solid Hood.....	277
For Cow Pen.....	243	With Revolving Hood, Specifications.....	273
Stanchion, Steel, No. J14.....	153	With Solid Hood, Specifications.....	279
Steel, No. T15, TA15, TC15.....	155	Walls (of Barn).....	19
Steel, X18 and XA18.....	157	Watering Buckets.....	161, 173, 175, 177
Wood, W18 and WA18.....	159	Wash Tank for Drinking Cups.....	177, 229
Stocks of Anchors.....	123	Watering Cups for Pens.....	233
Support for Carriers, Outside.....	207	Window Ventilators.....	281
Alongside Barn.....	207	Wood Linings.....	105

INDEX OF ILLUSTRATIONS

Adams, E. B. & Son, Exterior.....	76	Bull Stanchion.....	232, 238
Adjuster for Outtakes.....	280	Butterfly Farm, Interior.....	117
Alley Gate.....	286	Cabana, Oliver, Jr., Exterior.....	80
Alignment.....	114	Calf Pen.....	246, 247, 250
F. P. Lansing, Interior.....	116	Calf Pen Guards, "Anti-Sucking".....	247, 250
Amos, C. L., Exterior.....	22	Calf Pen Illustrations.....	246
Anchor Rod and Turnbuckle.....	225	Can Carrier, Milk.....	212
Anchors, Partition.....	112, 118	Car, Feed.....	210
Pen.....	234	Carnation Stock Farm, Interior.....	230
Stall Post.....	118	Carrier and Parts.....	196
Stanchion.....	118	Big Boy.....	196
Angle Bracket, Rod Track.....	225	Brake.....	188
Appearance of Ventilators.....	270	Clutch.....	188
Arch Support, Outside.....	205, 206	Hoist.....	188
Babson, F. K., Exterior.....	70	Carrier, Big Boy.....	184, 196, 208
Bailey-Comstock Co., Interior.....	184	Chore Boy.....	224
Banner, Grand Prize.....	86	Combination.....	220
Barron, C. W., Interior.....	244	Litter.....	182
Barn Scrapers.....	288	Milk Can.....	212
Base of Ventilators.....	275	Swill.....	214, 254
Beach, D. M., Exterior.....	22	Central Creamery Co., Exterior.....	18
Big Boy Carrier.....	184, 196, 208	Chain Hanger, Double.....	106
Bolts, Extension.....	194	Chain, Shaft and Lifting.....	192
Borden's Condensed Milk Co., Exterior.....	10	Chapman, H. H., Exterior.....	10
Borden Home Farm, Exterior.....	88	Chase, H. E., Exterior.....	80
Bowditch, N. L., Interior.....	117	Chore Boy Carrier.....	224
Bowman, H. W., Interior.....	88	Carrier Parts.....	225
Bowman, H. W., Exterior.....	78	Clamp Rod Track.....	225
Box Stalls, Horse.....	293	Cleaner, Manger.....	289
Bracket, Angle, Rod Track.....	225	Cleveland, City of, Exterior.....	74
Bradley, J. F., Exterior.....	78	Clough, L. S., Exterior.....	70
Brake, Carrier.....	188	Clutch, Carrier.....	188
Briggs, Glen L., Interior.....	76	Columns.....	282
Broadlawn Farms, Interior.....	32, 254	Combination Carrier Illustrations.....	216, 217, 222
Bull Manger.....	232, 238	Hoist.....	222
Bull Pen.....	238	Parts.....	222
Bull Pen Gate.....	236	Track Transfer.....	222
Bull Pen Hinge.....	236	Tracker Wheels.....	222
Bull Pen Lock.....	236	Combination Carrier.....	220
Bull Staff.....	287	Combination Switch.....	199
Bull Stall.....	150	Complete Mangers.....	132

INDEX OF ILLUSTRATIONS—Continued

Construction of Ventilators (Diagrams)		Hood, H. P. & Sons, Interior.....	117
Revolving Hood.....	266, 268, 272, 277	Hood, Construction of.....	262
Control Clutch and Brake, Carrier.....	188	Hood, Revolving, of Ventilator.....	262
Cork Brick Flooring.....	292	Hood, Solid, of Ventilator.....	276, 278
Corner Feed Box.....	300	Horse Stall Guards.....	299
Cow Cleanliness.....	92	Horse Stall Post.....	300
Cow Comfort.....	90	Horse Stall, Wood.....	300
Cow Pen.....	242	Horse, Box Stalls.....	293
Crabtree Farm, Calf Pens.....	246	Horse Stall.....	294, 296
Crane on End of Barn.....	204	Howe, E. D., Exterior.....	16
Crane on Mast.....	204	Howe, John, Exterior.....	24
Crane, Swinging.....	200, 201, 202	I-Beam Track.....	192
Cross Section, Hog Barn.....	252	Instructions for Erecting Stalls.....	151
Culver, H. E., Exterior.....	68, 204	Irwin, A. P., Exterior.....	184
Culver, H. E., Interior.....	68	James, W. D.....	301
Cups, Drinking.....	168, 170, 172, 176, 177	Jin Pole Support for Crane.....	204
Cup, Wash Tank, Drinking.....	178	Kramer, John, Exterior.....	30
Curtis, H. H.....	301, 285	Lansing, F. P., Interior.....	116
Curve or Switch, Rod Track.....	225, 237	Lifting Chain.....	192
Day, D. H., Exterior.....	72	Litter Carrier.....	182
Dean, Albert, Exterior.....	180	Lock, Bull Pen.....	236
Delchester Farms, Exterior.....	72	Lock, Door Knob.....	108
Dietrick, D. W., Exterior.....	12	Lowden, Col. F. O., Interior.....	186
Directions for Erecting Stalls.....	151	Mackenzie, Alex, Interior.....	18
Divisions, Manger.....	134, 136	Mann, Will, Interior.....	289
Double Chain Hanger.....	106	Manger, Bull.....	232, 238
Drain.....	280	Manger, Cleaner.....	289
Drinking Cups.....	168-177	Mangers, Complete.....	132
Type 4.....	168, 172	Manger Divisions.....	134, 136
Type 5.....	168	Manger Division Holder.....	138
Type 3.....	170, 176	Manger, for Calf Pens.....	246
Type 6.....	177	Manger, Operation of.....	130
Drinking Cup Wash Tank.....	178, 228	Manger, Tilting Feed for Cow Pens.....	242
Dunning, D. M., Exterior.....	84	Manger Troughs, Different Styles of.....	135
Dupe, Walter H., Exterior.....	74	Marshall, H. T., Interior.....	30
Edgewater, Interior.....	180	Metcalf, F. H., Exterior.....	80
Elmira Plant.....	6	Milanhurst Stock Farm, Exterior.....	182
End Stop, Rod Track.....	225	Milk Can Carrier.....	212
Erecting Equipment.....	120-128	Milk Can Truck.....	229
Cross Section of Stall and Floor.....	151	Milking Machine Fittings.....	290
Experimental Barn, Exterior.....	264, 265	Milk Stool.....	285
Fairfax Creamery, Exterior.....	260	Name Plates.....	291
Feed Box, Corner.....	300	North Florida Dairy Farms, Exterior.....	14
Feed Car.....	210	North Florida Dairy Farms, Erecting Equipment.....	120
Feed Truck.....	180, 226	Notre Dame University, Exterior.....	80
Fink, William, Exterior.....	24	Old Way Carrier (Wheelbarrow).....	182
Fittings, Stall.....	110	Outside Arch Support.....	205, 206
Flick, A. R., Exterior.....	80	Outside Wood Support.....	184, 207
Flooring, Cork Brick.....	292	Pabst, Fred, Calf Barn.....	248-249
Frankberg, G. W., Exterior.....	24	Paint.....	291
Friend's Hospital, Exterior and Interior.....	16, 244	Packham & Gill, Exterior.....	18
Gate, Bull Pen.....	236	Panama Pacific Exposition, Interior.....	96
Getzelman, T. E., Exterior.....	32	Panama Pacific Exposition Dairy Barn.....	96
Goodrich, C. P.....	301	Panel, Young Stock.....	241
Grahl Bros., Exterior.....	218	Partition Anchors.....	112, 118
Grand Prize Banner.....	86	Partitions.....	112, 118
Greek, Mrs. Mary, Interior of Barn.....	254	Patterson, M., Exterior.....	76, 182
Grundy, Jos. R., Erecting Equipment.....	120	Pelouse, Wm. N., Interior and Exterior.....	204
Guards, Calf Pen.....	247, 250	Pen Anchor, Tubular.....	234
Guards, Horse Stall.....	299	Pen, Bull.....	238
Hanger, Double Chain.....	106	Pen, Calf.....	246, 247, 250
Hangers.....	194, 197	Pen, Cow.....	242
Hangers to Pass Girders.....	197	Pen Gate, Bull.....	236
Harness Hooks.....	290	Pen Gate Lock, Bull.....	236
Hartwood Farm Calf Pen, Illustration.....	246	Pen Gate Hinge, Bull.....	236
Hellums, H. D., Exterior.....	260	Perry, Enoch, Exterior and Interior.....	14, 16, 254
Hershey Chocolate Company, Exterior.....	84	Plant.....	8, 9
Hill Top Certified Dairy Farm, Manure Pit.....	218	Plank Framing.....	26, 28
Hinge, Stanchion.....	106	Potter, C. S., Exterior.....	84
Hinge for Bull Pen.....	236	Prange, H. C., Exterior.....	88
Hog Barn Cross Section.....	252	Quinn, Frank J., Exterior.....	10
Hog Barn Interiors.....	254	Reeder & Brown, Exterior.....	84
Hog Pens.....	256, 258	Registers.....	280
Hog Trough.....	285	Regulating Tank.....	174
Hoist, Big Boy.....	188	Reiss, Peter, Interior.....	180, 230
Hoist, Carrier.....	188	Removable Section.....	192
Hoist, Combination Carrier.....	222	Returning Device, Rod Track.....	225
Home Plant.....	8, 9	Rod Track, Tension Bolt, etc.....	225
Hood, H. P. & Sons, Exterior.....	88	Rohda, A., Exterior.....	68
		Rundell, Lloyd, Interior.....	30

INDEX OF ILLUSTRATIONS—Continued

Safety Device.....	225	Sure Stop in Use.....	102, 103, 104
Safety Switches.....	198	Suspender, Rod Track.....	225
Sayre, E. N., Interior.....	7	Swill Carrier.....	214, 254
Scales, Dairy.....	292	Swinging Crane.....	200, 201, 202
Schmidt, Carl E., Interior.....	10	Switch, Rod Track.....	225
Scrapers, Barn.....	288	Switches.....	198, 199
Sears, Irvin ^o Interior.....	117	Syracuse University, Exterior.....	12, 260
Section, Removable.....	192	Tension Bolt, Rod Track.....	225
Shaft and Lifting Chain.....	192	Thompson, Carl, Exterior.....	76
Smaltz, E. E., Exterior.....	12	Thomson, F. H. & Son, Interior and Exterior.....	12, 72
Smith, G. N., Exterior.....	88	Tilting Feed Manger for Cow Pens.....	242
Smith, W. T., Interior.....	18	Track, I-Beam.....	192
Solid Hood of Ventilator.....	276, 278	Track and Splice.....	192
Sorlie, A. J., Exterior.....	72	Track Strut.....	222
Splice and Track.....	192	Track Transfer, Combination Carrier.....	222
Stall and Its Parts.....	98	Tracker Wheels.....	190
Stall, 14A.....	148	Tracker Wheels, Combination Carrier.....	222
14B.....	140, 142	Traverse City, Barn of, Interior.....	22
14C.....	134, 146	Troughs, Manger, Different Styles of.....	135
18F.....	144	Truck, Milk Can.....	229
18E.....	145	Tuberculosis Sanitarium, Interior and Exterior.....	66, 78
Stall for Bull.....	150	Tubular Pen Anchor.....	234
Stall Fittings.....	110	Turnbuckle and Anchor Rod.....	225
Stall Post Anchors.....	118	United States Indian School, Exterior.....	32
Stalls, Horses.....	293, 294, 296, 298	University of Wisconsin, Exterior and Interior.....	16, 166
Stall, Wood.....	160	Vanes for Ventilators.....	274
Stanchion Anchors.....	118	Van Winkle, G. H., Interior.....	244
Stanchion, Bull.....	232, 238	Ventilators, Appearance of.....	270
Stanchion Hinge.....	106	Ventilators, Base of.....	275
Stanchion, 14J.....	152, 160	Ventilators, Construction Diagrams.....	266, 268, 272, 277
TA-15.....	134, 140, 146, 154	Ventilators, Revolving Hood.....	262
T-15.....	154	Ventilators, Solid Hood.....	276, 278
X-18.....	142, 156	Ventilator Vanes.....	274
XA-18.....	144, 145, 156	Walker, J. W. G., Exterior.....	14
WA-18.....	158, 160	Waukesha County Asylum, Exterior.....	22
W-18.....	158, 160	Waukesha County Asylum, Interior.....	20, 282
Stanchion Panel, Young Stock.....	241	Waupun State Prison, Interior and Exterior.....	20, 70
State Tuberculosis Sanitarium, Exterior.....	66, 78	Wheelbarrow, Old Carrier Way.....	182
State Tuberculosis Sanitarium, Interior.....	246	Wheels, Tracker.....	190
Steel Support.....	184, 205, 206	White Horse Farm, Interior.....	244
Stevens, S. P., Exterior.....	24	Whiteleather, D. V., Exterior.....	24
Stillwell, W. E., Interior and Exterior.....	70, 74	Window Ventilator.....	280
Stimson, C. D., Exterior.....	32	Wood Stalls.....	160
Stock, Panel, Young.....	241	Wood Horse Stalls.....	298, 300
Stoltz, William F., Interior.....	30	Wood Support Alongside Barn.....	184, 207
Suffolk County Poor Farm, Exterior.....	78	Wood Support, Outside Track.....	184
Support, Arch, Outside.....	205, 206	Young Stock Panel.....	241
Support, Jin Pole.....	204	Ziegler, D., Exterior.....	14
Support, Outside, Wood.....	184, 207		
Sure Stop Detail.....	100		

INDEX OF BLUE PRINTS

Arrangement of Floor, Cross Section.....	46-49	Purline Plate, Detail.....	38
Cross Section of Floor.....	46-49	Round Barn Floor Plan.....	64
Cross Section Perspective of Barn.....	33	Sliding Door, Hay Chute.....	39
Cross Section, Typical.....	41-45	Tie Plate, Detail.....	38
Elevations, Side and End (Blue Print).....	34	Truss, Typical.....	35
Floor Plans.....	50-52	Typical Truss.....	35
Framing, End Elevation.....	37	Ventilating System, Connection to Ventilator.....	56
Framing, Side Elevation.....	36	Ventilating System, Cross Section.....	54-55
Framing Window.....	40	Ventilating System, Floor Plan.....	58, 59
Hay Chute Sliding Door.....	39	Ventilating System, Intakes.....	62
Hog Barn Floor Plan.....	60	Ventilating System, Outtakes.....	60
Perspective Cross Section of Barn.....	33	Window Detail.....	40



